


# MIOe-DB2000

Evaluation Board for MIO-2262

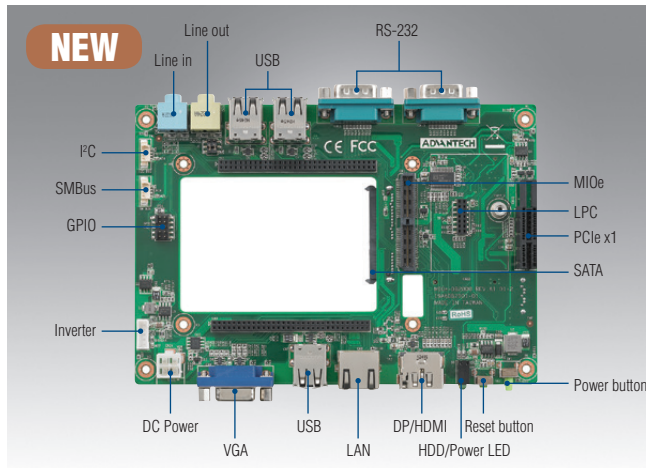

CE FCC


## Features

- Complete and Flexible Interface for Verification
- Expedite Customer's Carrier Board Development
- All Circuit Design Follow MI/O Extension Design Guide
- Use Standard EPIC Form Factor
- Interface: 1 x DP, 1 x PCIe, 1 x miniPCIe, 1 x SIM holder, 6 x USB 2.0, 1 x LPC, 1 x SMBus, 1 x I²C, 1 x HD Audio Line in, 1 x HD Audio Line out, 1 x SATA with power, 8-bit GPIO, PWR/HDD LED, PWR/Reset Button, Inverter, +12V Power in

## Specifications

Form Factor		EPIC
Compatible Models		MIO-2262
Display	VGA	1
	DP/HDMI	1 DP or HDMI (HDMI supported by request)
Storage	SATA with Power	1 (connect to 2.5" HDD)
Rear I/O	Ethernet	1 x RJ45
	VGA	1
	DP/HDMI	1 (HDMI supported by request)
	USB	6 x USB2.0
	LED	Power, HDD
	Power Button	1
	Reset Button	1
	HD Audio	Line in, Line out
	Serial	2 x RS-232 (ESD protection for RS-232: Air gap ±15kV, Contact ±8kV)
Internal I/O	DC Power Jack	1 (default 2x2pin power connector, DC jack supported by request)
	I²C	1
	SMBus	1
	Inverter	1
	GPIO	8-bit general purpose input/output
Expansion	LPC	1
	PCIe x1 slot	1
	Mini PCI Express	1 (Full-size)
	SIM card Holder	1
	MIOe connector	1
Power	64pin Connector	2
	Independent Power voltage	Single +12V DC in
Environment	Operation	0 ~ 60° C (32 ~ 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)
	Non-Operational	-40° C ~ 85° C and 60° C @ 95% RH Non-Condensing
Mechanical	Dimensions (L x W)	115 x 165 mm (4.5" x 6.5")
	Weight	0.25 kg (0.55 lb), weight of total package

## Block Diagram

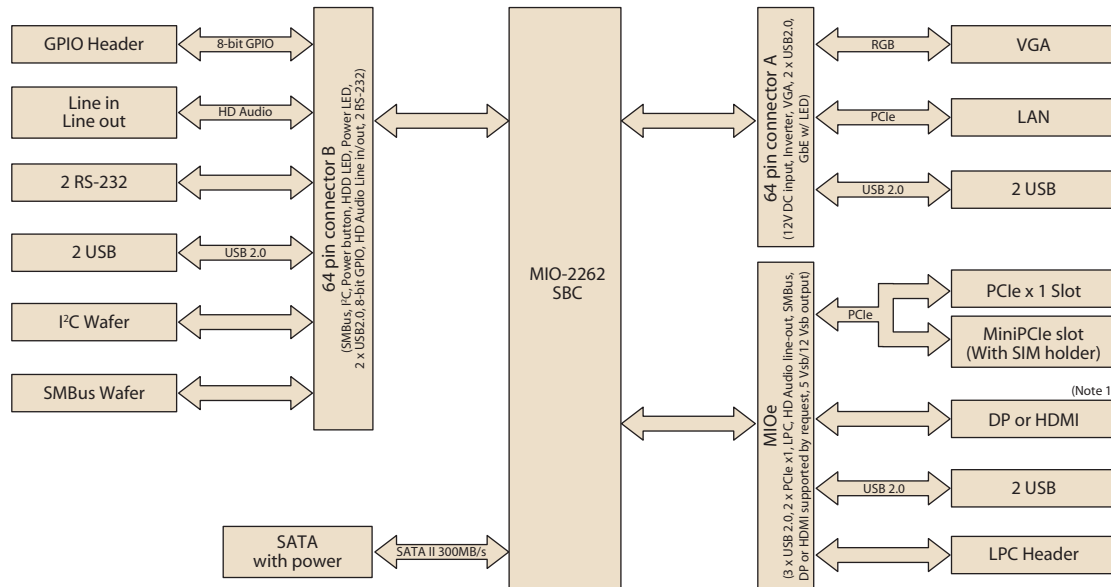

Note 1 : Supported by request

## Ordering Information

Part No.	DP/HDMI	VGA	GbE	PCIe x1	RS-232	Full-size Mini PCIe	SIM holder	SATA II	LPC	SMBus	I²C	USB 2.0	Audio	MIOe	Power Conn.
MIOe-DB2000-00A1E	1*	1	1	1	2	1	1	1	1	1	1	6	Yes	Yes	2x2 pin*

\* HDMI and DC jack supported by request

## Packing List

Part No.	Description	Quantity
MIOe-DB2000-00A1E	Evaluation Board for MIO-2262	1

## Optional Accessories

Part No.	Description
MIO-2262N-S6A1E	MIO-2262 N2600 SBC
MIO-2262N-S8A1E	MIO-2262 N2800 SBC

## Rear I/O View



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - x86 category](#):*

*Click to view products by [Advantech manufacturer](#):*

Other Similar products are found below :

[conga-MEVAL](#) [iQ7-DB-MATX-R10](#) [IT6/COMe Carrier](#) [DFR0453](#) [ETX-Proto](#) [Q7-BASE-R01](#) [Starterkit-CFE-E-2176M-3DIMM/M48G](#)  
[Starterkit-COM Express 6](#) [Starterkit-COM Express 6 PLUS](#) [VIZI-AI LEC-AL-E3940-AI-4G-32G/EMEA](#) [VPX-R300](#) [AKX00002](#)  
[AKX00002SL](#) [CEB94701](#) [7000-54864-102-101](#) [ARDUINO2.AL.B](#) [ARDUINO.AL.B](#) [GT.PDKW](#) [IOTGTWY.DK110](#) [IOTGTWY.DK200](#)  
[IOTGTWY.DK300](#) [IOTGTWY.DK50](#) [MIKROE-2582](#) [102010028](#) [110060064](#) [110060382](#) [110060577](#) [SOM-DB5800-00A2E](#) [ROM-](#)  
[DB7500-SCA1E](#) [conga-QEVAL/Qseven 2.0](#) [conga-QKIT](#) [X7EVAL/ind](#) [68300-0000-00-0](#) [MIKROE-2546](#) [DEV-13033](#)