


PCE-3026

LGA 1155 Intel® Core™ i7/i5/i3 Half-size SHB with PCIe/VGA/DVI/Dual GbE LAN

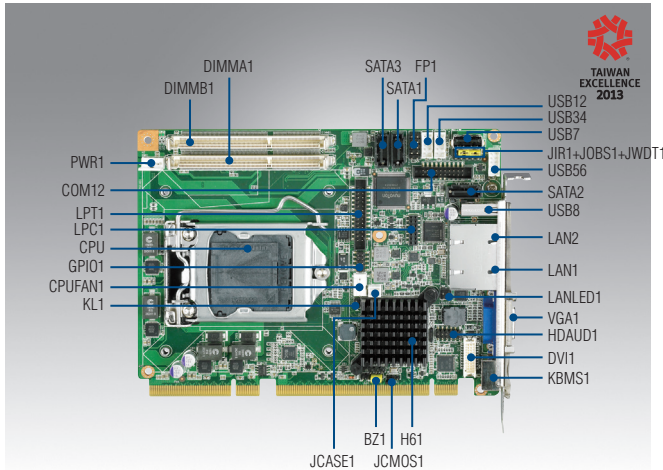

Features

- Complies with PICMG 1.3
- Supports LGA 1155 Intel® Core™ i7/i5/i3 processor
- Intel® H61
- Dual channel 1066/1333 MHz SO-DIMM up to 16 GB
- Three SATA 2.0 ports
- Supports dual 10/100/1000 Mbps Ethernet
- Supports one VGA and one DVI


Software APIs:



Specifications

Processor System	CPU	Core i7-3770	Core i7-2600	Core i5-3550S	Core i5-2400	Core i3-3220	Core i3-2120	Pentium G2120	Pentium G850	Celeron G540	
	Base Frequency	3.4 GHz	3.4 GHz	3.0GHz	3.1GHz	3.3GHz	3.3GHz	3.1GHz	2.9GHz	2.5GHz	
	L3 Cache	8 MB	8 MB	6 MB	6 MB	3 MB	3 MB	3 MB	3 MB	2 MB	
	Chipset	Intel H61									
	BIOS	AMI 64Mb SPI Flash									
BUS	PCI Express	One x16 & four x1 to backplane									
Memory	Technology	Dual channel DDR3 1066/1333 MHz SO-DIMM (Non ECC)									
	Max. Capacity	16 GB (8 GB per DIMM)									
	Socket	204-pin SODIMM x 2									
Graphics	Chipset Integrated	Chipset integrated Intel HD Graphics									
	Video Output	One DB-15 VGA output, One DVI out put									
Ethernet	Interface	10/100/1000 Mbps									
	Controller	GbE LAN1: Intel 82579V GbE PHY, GbE LAN2: Intel 82583V									
	Connector	RJ-45 x 2									
SATA	Max. Data Transfer Rate	300 MB/s (SATA 2.0)									
I/O Interface	USB	8 USB 2.0 480 Mbps (6 onboard, 1 on rear I/O, 1 type A onboard)									
	Serial	2 RS-232, and 4 RS-485 (optional: PCA-COM485-00A1E)									
	Parallel	1 (SPP/EPP/ECP)									
	PS/2	1									
Watchdog Timer	Output	System reset									
	Interval	Programmable 1 ~ 255 sec/ min									
Miscellaneous	Audio Output	HD audio interface (requires an audio extension module P/N: PCA-AUDIO-HDA1E)									
Power Requirement	Test environment	Core i5-2400 (3.1 GHz) + DDR3 1333 4 GB x 2									
	Voltage	+12 V	+5 V	+3.3 V	+5 VSB	-12 V	-5 V				
	Current	3.8 A	1.05 A	1.54 A	0.24 A	0 A	0 A				
Environment	Temperature	Operating				Non-Operating					
		0 ~ 60° C (32 ~ 140° F) (operation humidity: 40° C @ 85% RH Non-Condensing)				-40° C - 85° C and 60° C @ 95% RH Non-Condensing					
Physical Characteristics	Dimensions (W x D)	167.64 mm x 126.39 mm (6.6" x 4.98")									

Block Diagram

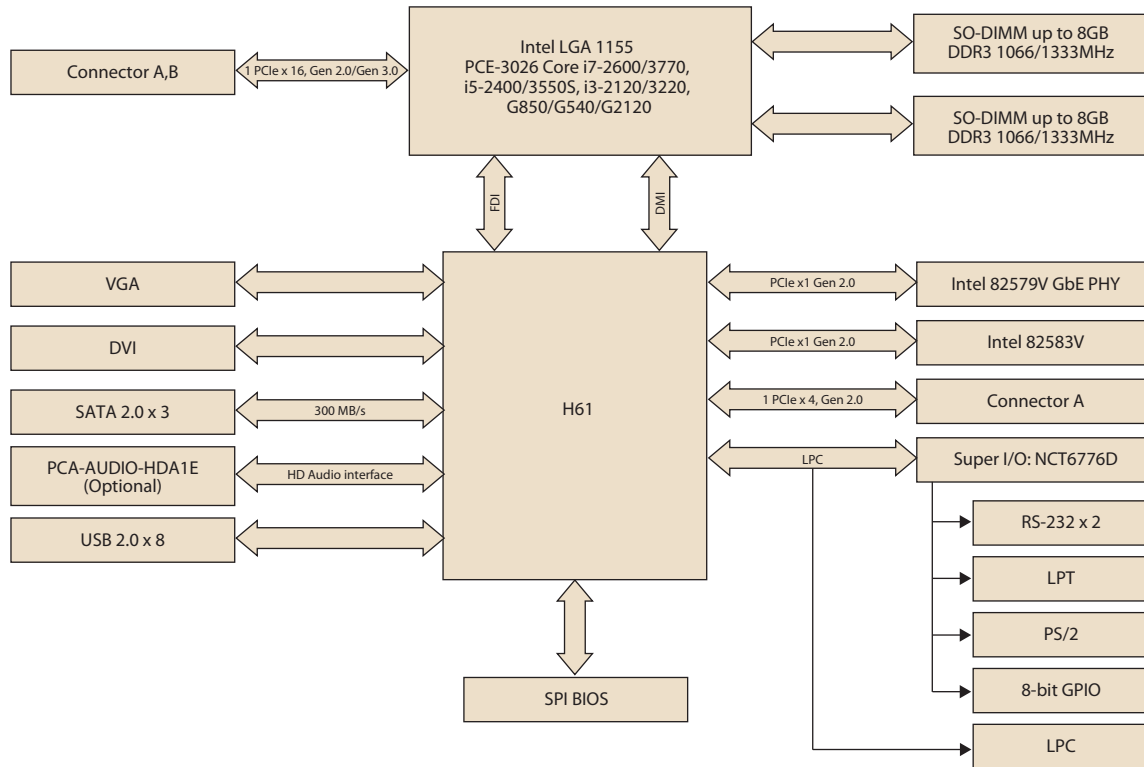

Ordering Information

Part Number	VGA	DVI	GbE LAN	USB	SATA	COM
PCE-3026G2-00A1E	Yes	1*	Dual	8	3	2 x RS-232 4 x RS-485 (optional)

* For DVI display, optional DVI cable (1700008822) is required.

Optional Accessories

Part Number	Description
PCA-AUDIO-HDA1E	Audio extension module with HD audio interface
PCA-TPM-00A1E	Trusted platform module compliant with TCG 1.2
PCA-COM485-00A1E	4 x RS-422/485 module
PCA-COM232-00A1E	4 x RS-232 module
1700008822	DVI cable
1960047831N001	2U CPU cooler for i7-3770, i7-2600, i5-3550S, i5-2400, i3-3220, i3-2120, G2120, G850, G540
1960053207N001	1.5U CPU cooler for i7-2600, i5-3550S, i5-2400, i3-3220, i3-2120, G2120, G850, G540
1960053065N001	1U blower for i3-3220, i3-2120, G2120, G850, G540

Compatible Backplane and Chassis

Backplane Model	PCI	PCIe x16	PCIe x4	PCIe x1	Compatible Chassis
PCE-3B03-00A1E	-	1	1	-	IPC-3026/ IPC-6806S
PCE-3B06-00A1E	-	1	-	4	IPC-3026/ IPC-6806S
PCE-3B06-03A1E	3	1	-	1	IPC-3026/ IPC-6806S

Packing List

Part Number	Description	Quantity
1700002223	Printer (parallel) port cable	1
1700003194	Serial ATA HDD data cable	1
1703150102	Serial ATA HDD power cable	1
1700008762	2-port COM cable kit	1
1700014398	4-port USB cable kit	1
1703040100	Power converter	1

Bracket View



PCE-3026

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)