


PCE-5026

LGA1155 Intel® Core™ i7/i5/i3 SHB
DDR3/SATA 2.0/Single GbE

NEW

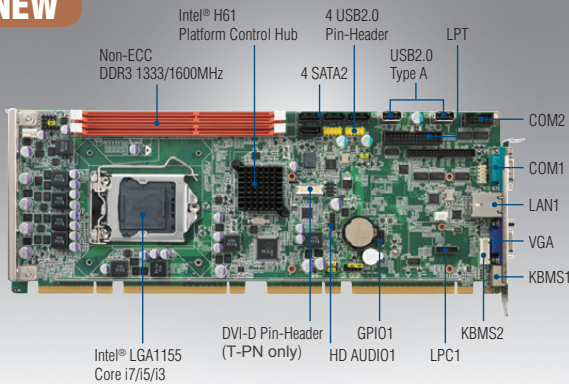

Features

- LGA1155 Intel® Core™ i7/i5/i3, Pentium® and Celeron® processors
- Dual Channel (Non-ECC) DDR3 1066/1333/1600* up to 16 GB
- Supports 10 USB2.0 and TPM1.2(Optional)
- Supports embedded software APIs and utilities

Software APIs:




Utilities:



Specifications

Processor System	CPU	Core i7-3770	Core i7-2600	Core i5-3550S	Core i5-2400	Core i3-3220	Core i3-2120	Pentium G2120	Pentium G850	Celeron G540	
	Base Frequency	3.4 GHz	3.4 GHz	3.0 GHz	3.1 GHz	3.3 GHz	3.3 GHz	3.1 GHz	2.9 GHz	2.5 GHz	
	L3 Cache	8 MB	8 MB	6 MB	6 MB	3 MB	3 MB	3 MB	3 MB	2 MB	
	Chipset	Intel H61									
	BIOS	AMI 64Mbit SPI Flash									
Bus	PCI Express	One PCIe x16, plus four x1 to backplane									
	PCI	Four 32-bit 33 MHz PCI Masters to Backplane									
Memory	Technology	Dual channel(Non-ECC) DDR3 1066/1333/1600*(depends on CPU Spec.)									
	Max. Cap.	16 GB (8 GB per DIMM)									
	Socket	DDR3 240-pin DIMM x 2									
Graphics	Controller	Chipset integrated Intel HD Graphics									
	VRAM	Shared system memory is subject to OS									
	Video Output	15 Pin VGA D-sub Connector x1/DVI-D connector x 1 (TPN optional)									
Ethernet	Interface	10/100/1000 Mbps									
	Controller	Intel 82579V									
	Connector with LED	RJ45 x 1									
SATA	SATA	SATA 2.0 x 4(300MB/sec)									
	Raid	-									
I/O Interface	USB	Ten USB2.0(Pin-header*4+Vertical USB A type*2+ 4 on backplane)									
	Serial	1 x RS-232 Pin-Header; 1 x RS-232 COM port									
	Parallel	1 (SPP/EPP/ECP)									
	PS/2	1 (Y cable for mouse and keyboard is included in the package)									
Watchdog Timer	Output	System reset									
	Interval	Programmable 1-255 sec									
Miscellaneous	Audio	Intel High Definition audio interface (required an audio extension module P/N: PCA-AUDIO-HDA1E)									
	Test Environment	Core i7-3770 (3.4 GHz) + DDR3 1066 4 GB x 2									
Power Requirement	Voltage	+12 V	+5 V	+3.3 V	+5 VSB	-12 V	-5 V				
	Current	5.92 A	0.9 A	2.01 A	0.22 A	0.02 A	0 A				
Environment	Ambient Temperature	Operating				Non-Operating					
		0 ~ 60° C(32 ~ 140° F); Operating humidity: 40° C @ 85% RH Non-Condensing				-40 ~ 85° C and 60° C @ 95% RH Non-Condensing					
Physical	Dimensions	338 mm (L) x 122 mm (W) (13.3" x 4.8")									

Block Diagram

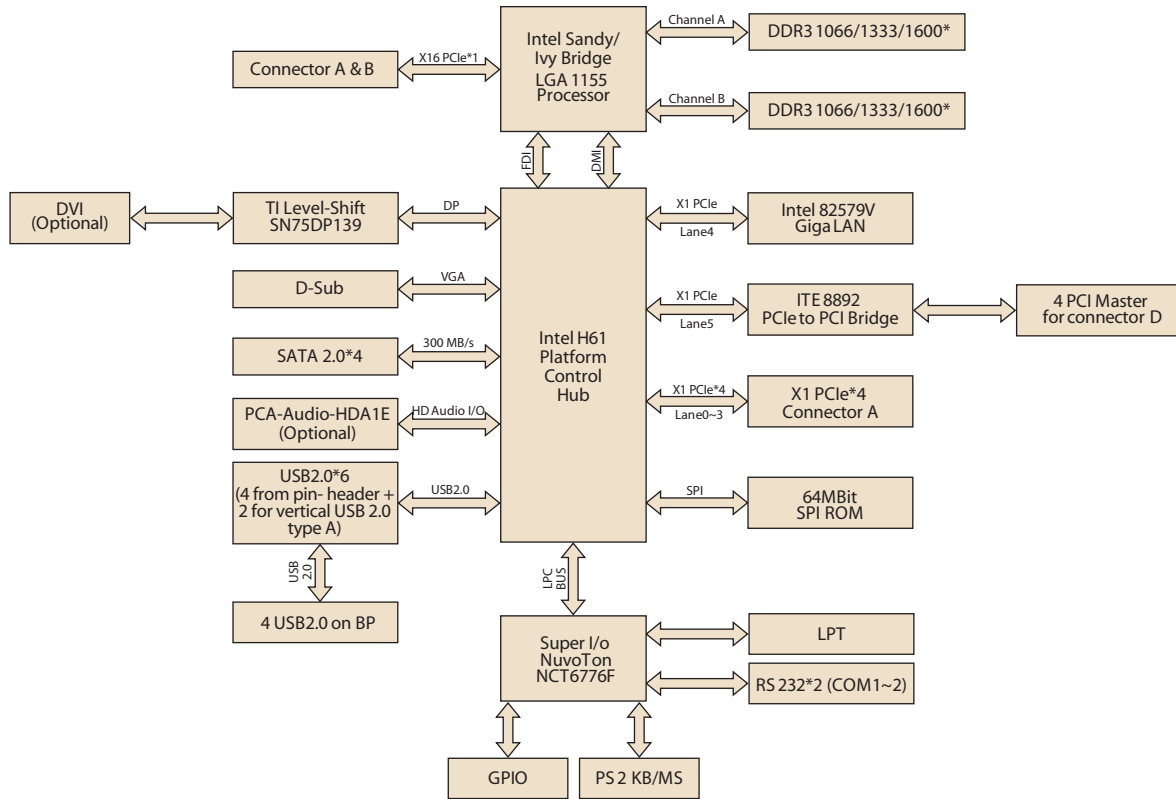

Ordering Information

Part Number	PCH	Memory	Backplane	LAN	VGA	DVI	COM	SATA II	USB 2.0	SW Raid	iAMT
PCE-5026VG-00A1E	H61	Non-ECC	PCE-5BXX	1	Yes	T-PN only	2	4	10	No	No

Optional Accessories

Part Number	Description
1960047831N001	PCE-5026 Proprietary CPU Cooler (2U)
PCA-AUDIO-HDA1E	Audio extension module
PCA-TPM-00A1E	Trusted Platform Module compliant TCG 1.2

Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x2
1703150102	Serial ATA HDD power cable	x2
1701260305	COM + printer ports cable kit	x1
1700060202	Keyboard and mouse Y-cable	x1
1700008461	4-port USB cable kit	x1
9689000068	Jumper package	x1
2190000902	Warranty Card	x1
2006502610	Startup manual	x1
2066502600	Utility CD	x1

Bracket View



PCE-5026VG-00A1E

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [BPI-M5](#)
[MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-](#)
[OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-](#)
[SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-](#)
[A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#)