


PCI-1720U

PCI-1724U

12-bit, 4-ch Isolated Analog Output Universal PCI Card

14-bit, 32-ch Isolated Analog Output Universal PCI Card

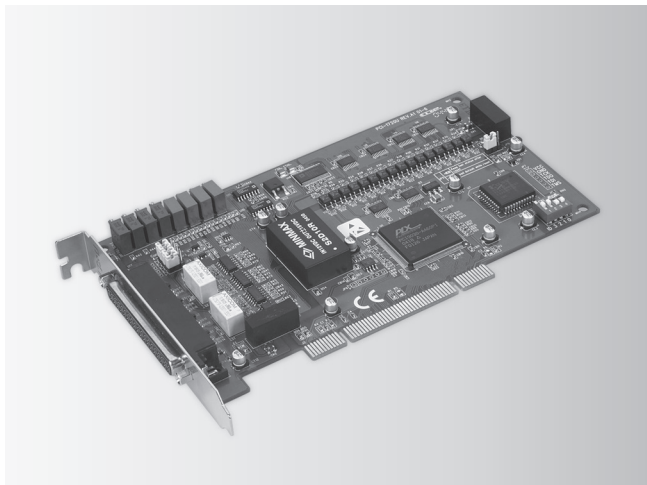

PCI-1720U



Specifications

Analog Output

- **Channels** 4 isolated
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range**

Bipolar (V)	±5, ±10
Unipolar (V)	0 ~ 5, 0 ~ 10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- **Slew Rate** 2 V/μs
- **Isolation Protection** 2,500 V_{DC}
- **Driving Capability** 5 mA
- **Operation Modes** Software polling
- **Accuracy** Relative: ±1 LSB; Differential Non-Linearity: ±1 LSB (monotonic)
- **Excitation Voltage** 50 V (max.)

General


- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** 5 V @ 350 mA (typical), 500 mA (max.)
12 V @ 200 mA (typical), 350 mA (max.)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCI-1720U** 12-bit, 4-ch Isolated AO Universal PCI Card

Accessories

- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

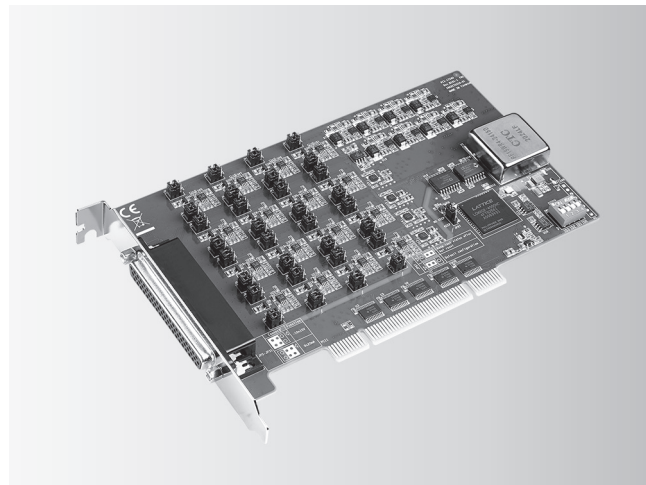

PCI-1724U



Specifications

Analog Output

- **Channels** 32 isolated
- **Resolution** 14 bits
- **Output Rate** Static update
- **Output Range**

Bipolar (V)	±10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- **Isolation Protection** 1,500 V_{DC} system isolation
- **Output Impedance** 0.1 Ω max.
- **Operation Modes** Software polling, synchronized output
- **Accuracy** Relative: ±4 LSB
Differential Non-linearity: ±2 LSB (monotonic)
- **Driving Capacity** 10 mA

General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 1 x DB62 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** 5 V @ 60 mA, 12 V @ 640 mA max.
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCI-1724U-BE** 14-bit, 32-ch Isolated AO Universal PCI Card

Accessories

- **PCL-10162-1E** DB62 Cable, 1 m
- **PCL-10162-3E** DB62 Cable, 3 m
- **ADAM-3962-AE** DB62 DIN-rail Wiring Board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#)