


# PCI-1723

# PCI-1727U

16-bit, 8-ch Analog Output PCI Card with  
16-ch Digital I/O

14-bit, 12-ch Analog Output Universal  
PCI Card with 32-ch Digital I/O

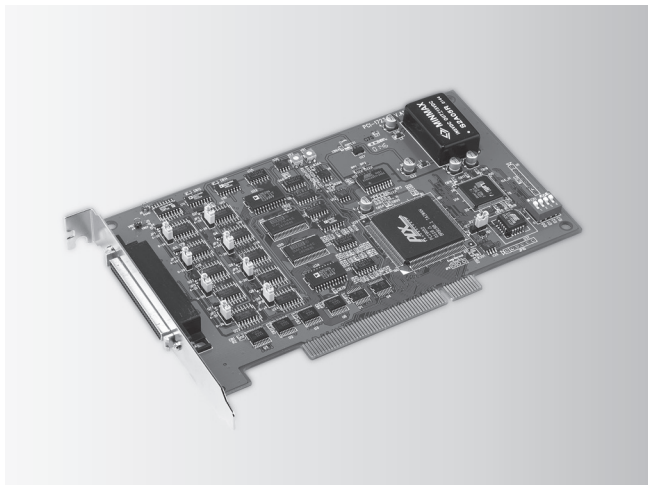

PCI-1723

FCC CE RoHS  
COMPLIANT  
2002/95/EC

## Specifications

### Analog Output

- Channels 8
- Resolution 16 bits
- Output Rate Static update
- Output Range

Bipolar (V)	±10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Driving Capability 5 mA
- Output Impedance 0.1  $\Omega$  max.
- Operation Modes Software polling, synchronized output
- Accuracy Relative:  $\pm 6$  LSB  
Differential Non-linearity:  $\pm 6$  LSB (monotonic)

### Digital Input/Output

- Channels 16 (shared by input/output)
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Output Capability Sink Sink: 0.5 V @ 24 mA  
Source: 2.0 V @ 15 mA

### General


- Bus Type PCI V2.2
- I/O Connectors 1 x 68-pin SCSI female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption Typical: 5 V @ 850 mA, 12 V @ 600 mA  
Max.: 5 V @ 1 A, 12 V @ 700 mA
- Operating Temperature 0 ~ 60°C (32 ~ 158°F)
- Storage Temperature -20 ~ 85°C (-4 ~ 185°F)
- Storage Humidity 5 ~ 95% RH non-condensing

## Ordering Information

- PCI-1723 16-bit, 8-ch Non-isolated Analog Output PCI Card

### Accessories

- PCL-10168-1E 68-pin SCSI Shielded Cable, 1 m
- PCL-10168-2E 68-pin SCSI Shielded Cable, 2 m
- ADAM-3968 68-pin DIN-rail SCSI Wiring Board

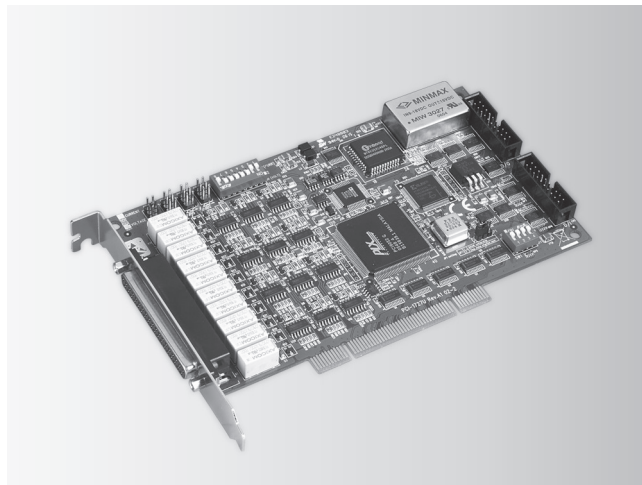

PCI-1727U

FCC CE RoHS  
COMPLIANT  
2002/95/EC

## Specifications

### Analog Output

- Channels 12
- Resolution 14 bits
- Output Rate Static update
- Output Range

Bipolar (V)	±10
Current Loop (mA)	0 ~ 20

- Slew Rate 0.7 V/ $\mu$ s
- Driving Capability 15 mA
- Operation Modes Software polling, synchronized output
- Current Loop Excitation 8 ~ 36 V

### Digital Input

- Channels 16
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- Input Loading 0.5 V @ 0.4 mA max. (low)  
2.7 V @ 50  $\mu$ A max. (high)

### Digital Output

- Channels 16
- Compatibility 5 V/TTL
- Output Voltage Logic 0: 0.5 V, Logic 1: 2.4 V
- Output Capability Sink: 0.5 V @ 8 mA  
Source: 2.4 V @ 0.4 mA

### General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x 37-pin D-type female connector  
2 x 20-pin box header
- Power Consumption 5 V @ 460 mA typical, 500 mA max  
12 V @ 150 mA typical, 100 mA max
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Operating Temperature 0 ~ 50°C (32 ~ 122°F)
- Storing Temperature -20 ~ 65°C (-4 ~ 149°F)
- Storing Humidity 5 ~ 95% RH, non-condensing

## Ordering Information

- PCI-1727U 14-bit, 12-ch Universal Analog Output Card

### Accessories

- PCL-10120-1E 20-pin flat cable, 1 m
- PCL-10137-1E DB37 cable assembly, 1 m
- ADAM-3937 DB37 wiring terminal for DIN-rail mounting

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#)