


# PCL-725

## 8-ch Relay and 8-ch Isolated Digital Input ISA Card

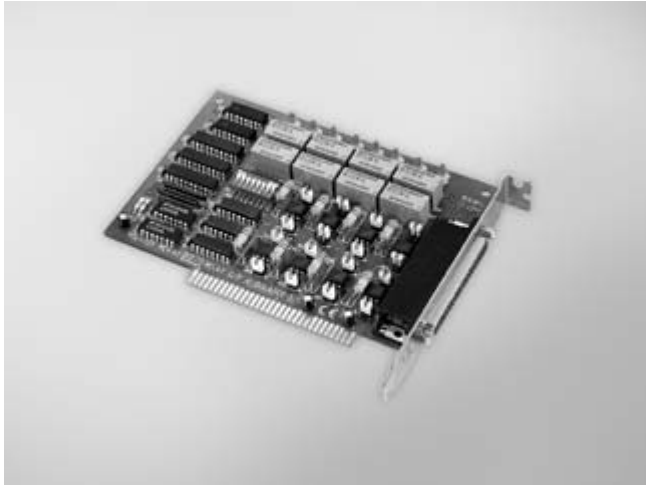

### Features

- 8 x relay output channels and 8 x isolated digital input channels
- LED indicators to show activated relays
- 4 x Form C and 4 x Form A type relay output channels
- Male DB37 matching connector included
- Output status readback

### Introduction

The PCL-725 relay actuator and isolated digital input card offers 8 relay actuators and 8 opto-isolated digital inputs on a single board. Typically, the onboard relays can serve as on/off control devices or small power switches. The 8 x opto-isolated DI channels are ideal devices for collecting digital inputs under noisy environment or floating potential. Also, the 8 x isolated inputs provide the best method to prevent any ground loop problems.

For easy monitoring, each relay is equipped with one red LED to reflect its on/off status. Each input channel is jumper selectable to either isolated or non-isolated input. Access to input and output channels is made possible through an onboard 37-pin D type connector.

### Specifications

#### Isolated Digital Input

- Channels 8
- Input Voltage 5 ~ 24 V<sub>DC</sub>
- Isolation Protection 1,500 V<sub>DC</sub>
- Input Resistance 560 Ω
- Input Current 60 mA max.

#### Non-isolated Digital Input

- Channels 8 (Jumper-selectable)
- Input Voltage Logic 0: 0.8 V max.  
Logic 1: 2.0 V min. (5.25 V max.)

#### Relay Output

- Channels 8
- Relay Type SPDT (4 x Form C and 4 x Form A)
- Contact Rating 120 V<sub>AC</sub> @ 0.5 A, or 30 V<sub>DC</sub> @ 1 A
- Relay on Time 8 ms max.
- Relay off Time 8 ms max.
- Life Span 1 x 10<sup>7</sup> operations
- Resistance Contact: 50 mΩ  
Insulation: 100 MΩ min.

#### General

- Bus Type ISA
- I/O Connectors 1 x DB37 female connector
- Dimensions (L x H) 147 x 100 mm (5.75" x 3.9")
- Power Consumption 5 V @ < 0.2 A; 12 V @ 33 mA for each relay  
< 0.27 A if all eight relays are energized
- Operating Temperature 0 ~ 60° C (32 ~ 140° F) (IEC 68-2-1, 2)
- Storage Temperature -20 ~ 70° C (-4 ~ 158° F)
- Storage Humidity 5 ~ 95 % RH, non-condensing (IEC 68-2-3)

### Ordering Information

- PCL-725 8-ch Relay/Isolated Digital Input ISA Card
- PCL-10137-1 DB37 Cable, 1 m
- PCL-10137-2 DB37 Cable, 2 m
- PCL-10137-3 DB37 Cable, 3 m
- ADAM-3937 DB37 DIN-rail Wiring Board
- PCLD-880 Wiring Board w/ Two 20-pin Flat Cables & Adapter

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#)