


# PCL-730

## 32-ch Isolated Digital I/O ISA Card

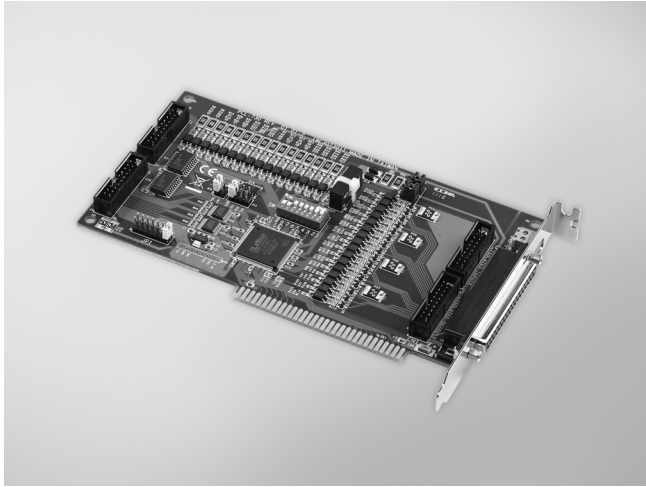

RoHS  
COMPLIANT  
2002/95/EC

FCC CE

### Features

- 32 isolated DIO ch. (16 inputs and 16 outputs)
- 32 TTL-level DIO ch. (16 inputs and 16 outputs)
- High output driving capacity
- Interrupt capability
- Two 20-pin connectors for isolated digital I/O channels and two for TTL digital I/O channels
- D-type connector for isolated input and output channels
- High-voltage isolation on output channels

### Introduction

The PCL-730 offers isolated digital input channels as well as isolated digital output channels with isolation protection up to 2,500 V<sub>DC</sub>, which makes them ideal for industrial applications where high-voltage isolation is required. There are also 32 TTL DIO channels.

### Specifications

#### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** 2 (DIO, DI1)

#### Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 1 V max.  
Logic 1: 5 V min., 24 V max.
- **Interrupt Capable Ch.** 2 (IDIO, IDI1)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100  $\mu$ s
- **Input Resistance** 3 K $\Omega$  @ 0.2 W

#### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** Sink: 8 mA  
Source: 0.4 mA

#### Isolated Digital Output

- **Channels** 16
- **Output Type** Sink type (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** 200 mA max./channel
- **Opto-Isolator Response** 100ms

#### General

- **Bus Type** ISA
- **I/O Connectors** 1 x 37-pin D-type female  
2 x 20-pin box header for fl at cable
- **Dimensions (L x H)** 185 x 100 mm (7.3" x 3.9")
- **Power Consumption** Typical: 5 V @ 330 mA; 12 V @ 80 mA  
Max.: 5 V @ 500 mA; 12 V @ 105 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

### Ordering Information

- **PCL-730** 32-channel isolated digital I/O card, user's manual and driver CD-ROM (cable not included)
- **PCL-10120-1** 20-pin fl at cable, 1m
- **PCL-10120-2** 20-pin fl at cable, 2m
- **ADAM-3920** 20-pin fl at cable wiring terminal for DIN-rail mounting
- **PCLD-782** 16-channel opto-isolated D/I board
- **PCLD-785** 16-channel relay output board
- **PCLD-885** 16-channel power relay (form A) output board
- **PCL-10137-1** DB37 cable, 1m
- **PCL-10137-2** DB37 cable, 2m
- **PCL-10137-3** DB37 cable, 3m
- **ADAM-3937** DB37 wiring terminal for DIN-rail mounting

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#)  
[G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#)  
[70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#)  
[84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [C200H-OD211](#)