


# PCL-818HD/HG

# PCL-818L

**100 kS/s, 12-bit, 16-ch ISA  
Multifunction Card**

**40 kS/s, 12-bit, 16-ch ISA  
Multifunction Card**

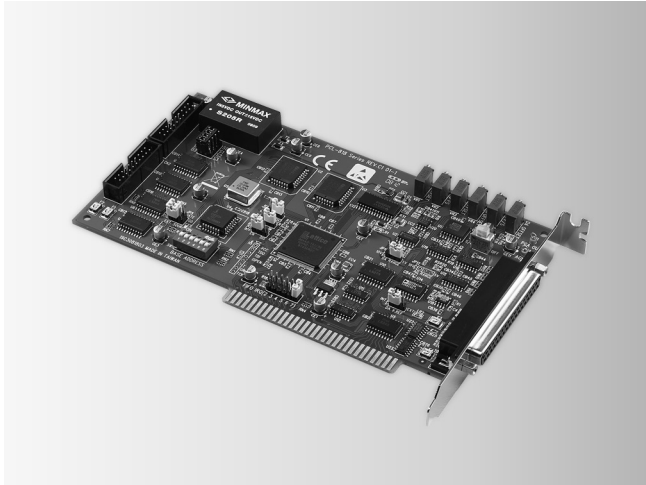

## Features

- 16-ch single-ended or 8-ch differential analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples, PCL-818HD/HG only)
- One 12-bit analog output channel
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter

## Introduction

The PCL-818L series was designed for entry-level models to the PCL-818 series. The cards have been designed with the cost-sensitive customer in mind, but still offers the same functions as the rest of the series, except that they have a 40 kHz sampling rate and only accepts bipolar inputs. They are fully software and connector compatible with the PCL-818HD and PCL-818HG. This lets you upgrade your applications to these higher performance cards without hardware or software changes.

The PCL-818LS bundle consists of the PCL-818L card, the PCLD-8115 wiring terminal board and a DB37 cable assembly. The PCLD-8115 accommodates onboard passive signal conditioning components (resistors and capacitors), allowing you to easily implement a low-pass filter, a voltage attenuator or a 4 – 20 mA voltage converter.

## Specifications

### Analog Input

- **Channels** 16 single-ended / 8 differential
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s for all input ranges (PCL-818HD/HG only)  
40 kS/s for all input ranges (PCL-818L only)
- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 10 MΩ
- **Sampling Modes** Software, pacer or external
- **Input Range** (V, software programmable)

PCL-818L/818HD					
<b>Bipolar</b>	±10	±5	±2.5	±1.25	±0.625
<b>Unipolar*</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4

\* Note: PCL-818L doesn't support unipolar input range.

PCL-818HG								
<b>Bipolar</b>	±10	±5	±1	±0.5	±0.1	±0.05	±0.01	±0.005
<b>Unipolar</b>	N/A	0 ~ 10	N/A	0 ~ 1	N/A	0 ~ 0.1	N/A	0 ~ 0.01
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4	0.4	0.8	0.8

### Analog Output

- **Channels** 1
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

<b>Internal Reference</b>	<b>Unipolar</b>	0 ~ 5, 0 ~ 10
<b>External Reference</b>		0 ~ 10, 0 ~ -10

### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** Sink: 8 mA  
Source: -0.4 mA

### Timer/Counter

- **Channels** 1
- **A/D Pacer** 32-bit with 10 MHz or 1 MHz time base
- **Max. and Min. Rates** 2.5 MHz and 0.00023 Hz
- **Counter** One 16-bit counter with 100 kHz time base

### General

- **Power Consumption** 5 V @ 210 mA typical, 500 mA max.  
12 V @ 20 mA typical, 100 mA max.  
-12 V @ 20 mA typical, 40 mA max.
- **I/O Connector** 1 x DB37 female connector  
2 x 20-pin box header
- **Dimensions (L x H)** 155 x 100 mm (6.1" x 3.9")
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 65° C (-4 ~ 149° F)
- **Operating Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

## Ordering Information

- **PCL-818HD** High-performance Half-size Multifunction Card
- **PCL-818HG** High-performance and High-gain Multi. Card
- **PCL-818L** Low-cost High-perform. Half-size Multi. Card
- **PCL-818LS** PCL-818L w/ PCLD-8115 and DB37 Cable

### Accessories

- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-8115** Wiring Board w/ CJC Circuit & One DB37 Cable
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter

## Pin Assignments

CN1			CN2			
D/O 0	1	2	D/O 1	D/I 0	1	2
D/O 2	3	4	D/O 3	D/I 2	3	4
D/O 4	5	6	D/O 5	D/I 4	5	6
D/O 6	7	8	D/O 7	D/I 6	7	8
D/O 8	9	10	D/O 9	D/I 8	9	10
D/O 10	11	12	D/O 11	D/I 10	11	12
D/O 12	13	14	D/O 13	D/I 12	13	14
D/O 14	15	16	D/O 15	D/I 14	15	16
D.GND	17	18	D.GND	D.GND	17	18
+5 V	19	20	+12 V	+5 V	19	20

### CN3 (Single ended)

A/D S0	1	20	A/D S8		
A/D S1	2	21	A/D S9		
A/D S2	3	22	A/D S10		
A/D S3	4	23	A/D S11		
A/D S4	5	24	A/D S12		
A/D S5	6	25	A/D S13		
A/D S6	7	26	A/D S14		
A/D S7	8	27	A/D S15		
A.GND	9	28	A.GND		
A.GND	10	29	A.GND		
VREF	11	30	DA0.OUT		
S0*	12	31	DA0.VREF		
+12 V	13	32	S1*		
S2*	14	33	S3*		
D.GND	15	34	D.GND		
NC	16	35	EXT.TRIG		
Counter	17	36	Counter 0		
Counter	18	37	PACER		
+5 V	19				

### CN3 (Differential)

A/D H0	1	20	A/D L0		
A/D H1	2	21	A/D L1		
A/D H2	3	22	A/D L2		
A/D H3	4	23	A/D L3		
A/D H4	5	24	A/D L4		
A/D H5	6	25	A/D L5		
A/D H6	7	26	A/D L6		
A/D H7	8	27	A/D L7		
A.GND	9	28	A.GND		
A.GND	10	29	A.GND		
VREF	11	30	DA0.OUT		
S0*	12	31	DA0.VREF		
+12 V	13	32	S1*		
S2*	14	33	S3*		
D.GND	15	34	D.GND		
NC	16	35	EXT.TRIG		
Counter	17	36	Counter 0		
Counter	18	37	PACER		
+5 V	19				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Data Logging & Acquisition](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[PCI-6208A](#) [DAQe-2502](#) [PXI-2208](#) [ACL-8112DG](#) [SpotBotBLE](#) [LPCI-7230](#) [USB-4761-BE](#) [SE028](#) [PCI-1761-BE](#) [AR207/8/S1/PPPP/IP65](#)  
[PCI-1711UL-CE](#) [USB-4702-AE](#) [USB-4704-AE](#) [USB-4716-AE](#) [USB-4750-BE](#) [USB-4751-AE](#) [PCIE-1810-AE](#) [PCI-1710U-DE](#) [PCI-](#)  
[1710HGU-DE](#) [AR207/8/S1/PPPP/IP30](#) [U2781A](#) [4610](#) [EL-USB-5](#) [AR407/S1/P/P/P/P](#) [AR207/8/S2/PPPP/IP30](#) [ACL-8112PG](#) [cPCI-7248](#)  
[cPCI-7433](#) [DAQ-2213](#) [ND-6053](#) [ND-6060](#) [PCI-7230](#) [PCI-7432](#) [PCI-7442](#) [PCI-9112](#) [PCI-9112A](#) [PCI-9113A](#) [PCI-9221](#) [PCM-7248+](#) [USB-](#)  
[1903](#) [USB-2401](#) [PCIE-1813-AE](#) [PCIE-1816-AE](#) [PCIE-1816H-AE](#) [PCIE-1884-AE](#) [USB-5856-AE](#) [USB-5862-AE](#) [AR654/S1/P/P/P/P/IP30](#)  
[AR654/S2/P/P/P/P/IP30](#) [DAS30](#)