


PCM-3810I

PCM-3813I


250 kS/s, 12-bit, 16-ch
Multifunction PCI-104 Module

100 kS/s, 12-bit, 32-ch
Isolated Analog Input PCI-104 Module

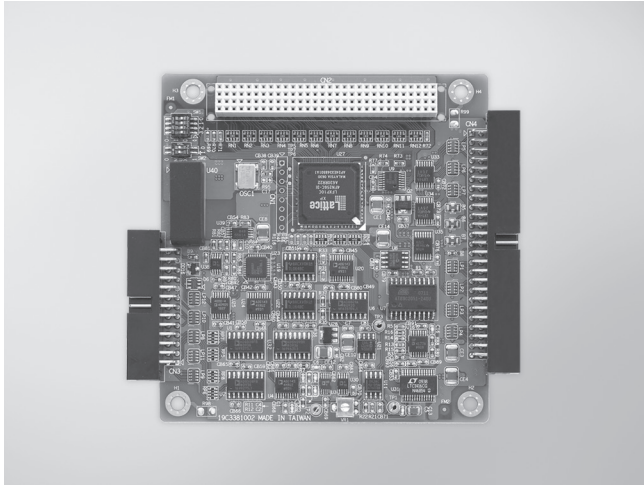

PCM-3810I

FCC CE RoHS

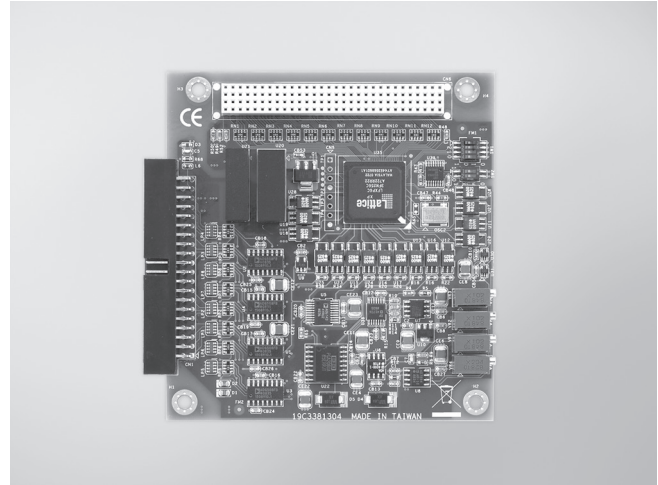

PCM-3813I

FCC CE RoHS

Specifications

Analog Input

- Channels 16 single-ended or 8 differential or combination
- Resolution 12 bits
- Max. Sampling Rate 250 kS/s
- Ring Buffer Size 4,096 samples
- Input Range and Gain List

| Gain | 0.5 | 1 | 2 | 4 | 8 |
|----------|-----|--------|-------|---------|----------|
| Unipolar | N/A | 0 ~ 10 | 0 ~ 5 | 0 ~ 2.5 | 0 ~ 1.25 |
| Bipolar | ±10 | ±5 | ±2.5 | ±1.25 | ±0.625 |

- Input Protection 30 Vp-p
- Sampling Mode Polling, pacer, double-clock, or external clock
- Trigger Mode Pre-trigger, post-trigger, delay-trigger, about-trigger

Analog Output

- Channels 2
- Output Range Internal Reference (V): 0 ~ 5, 0 ~ 10, ±5, ±10
External Reference: 0 ~ +x V @ +x V (-10 ≤ x ≤ 10)
-x ~ +x V @ +x V (-10 ≤ x ≤ 10)
- Resolution 12 bits
- Output Rate 250 kS/s
- Ring Buffer Size 4,096 samples
- Slew Rate 20 V/μs
- Operation Mode Software polling, continuous out

Digital Input/Output

- Channels 16
- Compatibility 5V/TTL

Counter/Timer

- Channels 3 (independent)
- Resolution 24 bits
- Compatibility 5 V/TTL
- Max. Input Frequency 10 MHz
- Counter Modes 12 (programmable)
- Interrupt Capable Ch. 3
- PWM Channels 3

General

- Bus Type PCI-104
- I/O Connectors 1 x 26-pin, 1 x 50-pin box header
- Dimensions (L x H) 96 x 90 mm (3.8" x 3.5")
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)

Ordering Information

- PCM-3810I 250 kS/s, 12-bit Multi. PCI-104 Module

Accessories

- PCL-10150-1.2E 50-pin Flat Cable, 1.2 m
- ADAM-3950 50-pin DIN-rail Flat Cable Wiring Board

Features

- Compact size with robust design
- 32 single-ended or 16 differential analog inputs
- Programmable gain for each input channel
- Automatic channel/ gain/ SD scanning
- Onboard ring buffer (1,024 samples)
- Isolation protection (2,500 V_{DC})

Specifications

Analog Input

- Channels 32 single-ended or 16 differential or combination
- Resolution 12 bits
- Max. Sampling Rate 100 kS/s
- Ring Buffer Size 1,024 samples
- Input Range and Gain List

| Gain | 0.5 | 1 | 2 | 4 | 8 |
|----------|-----|--------|-------|---------|----------|
| Unipolar | N/A | 0 ~ 10 | 0 ~ 5 | 0 ~ 2.5 | 0 ~ 1.25 |
| Bipolar | ±10 | ±5 | ±2.5 | ±1.25 | ±0.625 |

- Input Protect 30 Vp-p
- Input Impedance 100 MΩ/10pF (off); 100 MΩ/100pF (on)
- Sampling Mode Software polling, onboard programmable pacer, or external TTL trigger

General

- Bus Type PCI-104
- I/O Connectors 1 x 40-pin box header
- Dimensions (L x H) 96 x 90 mm (3.8" x 3.5")
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)

Ordering Information

- PCM-3813I 100 kS/s, 12-bit Isolated AI PCI-104 Module

Accessories

- PCL-10141-0.2E IDE#2 40-pin to DB37(F) Flat CABLE, 0.2 m
- PCL-10137-1E DB37 Cable, 1 m
- PCL-10137-2E DB37 Cable, 2 m
- PCL-10137-3E DB37 Cable, 3 m
- ADAM-3937 DB37 DIN-rail Wiring Board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Data Logging & Acquisition](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[PCI-6208A](#) [DAQe-2502](#) [PXI-2208](#) [ACL-8112DG](#) [SpotBotBLE](#) [LPCI-7230](#) [USB-4761-BE](#) [SE028](#) [PCI-1761-BE](#) [AR207/8/S1/PPPP/IP65](#)
[PCI-1711UL-CE](#) [USB-4702-AE](#) [USB-4704-AE](#) [USB-4716-AE](#) [USB-4750-BE](#) [USB-4751-AE](#) [PCIE-1810-AE](#) [PCI-1713U-BE](#) [PCI-1710U-](#)
[DE](#) [PCI-1710HGU-DE](#) [AR207/8/S1/PPPP/IP30](#) [U2781A](#) [4610](#) [EL-USB-5](#) [AR407/S1/P/P/P/P](#) [AR207/8/S2/PPPP/IP30](#) [ACL-8112PG](#) [cPCI-](#)
[7248](#) [cPCI-7433](#) [DAQ-2213](#) [ND-6053](#) [ND-6060](#) [PCI-7230](#) [PCI-7432](#) [PCI-9111DG](#) [PCI-9112](#) [PCI-9112A](#) [PCI-9113A](#) [PCI-9221](#) [PCM-](#)
[7248+](#) [USB-1903](#) [USB-2401](#) [PCIE-1813-AE](#) [PCIE-1816-AE](#) [PCIE-1816H-AE](#) [PCIE-1884-AE](#) [USB-5856-AE](#) [USB-5862-AE](#)
[AR654/S2/P/P/P/P/IP30](#) [DAS30](#)