


PCM-9365

**Intel® Atom™ E3825 & Celeron® N2930,
3.5" SBC, 2GB/4GB On-board Memory,
VGA, 48-bit LVDS, 2GbE, Mini PCIe,
PCI-104, iManager**

NEW

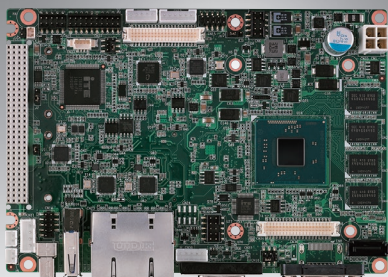

iManager susiAccess **CE FCC**

Features

- Intel® Atom™ E3825 & Celeron® N2930, DDR3L-1066/1333MHz 2GB/4GB on-board memory
- DirectX11, OpenGL3.2, OpenCL1.1, 3 independent display: VGA+LVDS/HDMI+LVDS*/Dual LVDS
- Support PCI-104 expansion
- 2 GbE, rich I/O: 4COM, SATA, USB3.0, SMBus/I²C, GPIO, full-size Mini PCIe, full-size mSATA
- Supports iManager (SUSI 4.0), SUSIAccess and Embedded Software APIs

Software APIs:



Utilities:




Specifications

Processor System	CPU	Intel Celeron N2930	Intel Atom E3825
	Base Frequency	1.83 GHz (Quad-Core)	1.33 GHz (Dual-Core)
	Max Turbo Frequency	2.16 GHz	-
	L2 Cache	2MB	1MB
	BIOS	AMI UEFI BIOS at 64 Mb	
Memory	Technology	DDR3L 1333 MHz	DDR3L 1066 MHz
	Max. Capacity	4 GB	
	On-board memory	Yes	
Display	Controller	Intel Gen7 graphic engine	
	Processor Graphics	DirectX11, OpenGL3.2, OpenCL1.1	
	VGA	2560 x 1600 at 60Hz	
	LVDS	48-bit dual LVDS up to WUXGA 1920 x 1200 at 60Hz, the 2nd LVDS is supported by request	
	HDMI	Supports 3.3/5/12V for VDD power, 1A@5V/12V for inverter	
	HDMI	HDMI 1.4a for HD video playback, 1080P at 60Hz	
Ethernet	Muilt-Display	VGA + LVDS, HDMI*+ LVDS, LVDS + LVDS*	
	Speed	10/100/1000Mbps	
	Controller	Realtek RTL8111E-VL-CG	
Audio	Connector	2 RJ45	
	Codec	Realtek ALC888S, High Definition Audio (HD), Line-in, Line out, Mic-in	
WatchDog Timer		Output System reset, Programmable counter from 1 – 255 minutes/ seconds	
Storage	SATA	1, up to 3Gb/s (300 MB/s)	
	mSATA	1 x Full-size	
Rear I/O	Ethernet	2 (10/100/1000Mbps)	
	VGA	1	
	HDMI	1 (support by request)	
	USB 2.0	1	
	USB 3.0	1	
	Serial	1 RS232/422/485 support auto flow control	
Internal I/O	Serial	3 RS-232 (ESD protection: Air gap ±15kV, Contact ±8kV)	
	USB2.0	4	
	I ² C	1 (Shared with SMBus pin)	
	SMBus	1	
	GPIO	8-bit	
Expansion	Mini PCIe	1 x Full-size	
	PCI-104	PCI-104 Expansion	
Power	Power Type	Single 12V DC power input	
	Power Supply Voltage	12V ± 10%	
	Power Consumption (Typical)	PCM-9365E-2GS3A1E : 0.39A @ 12V (4.68W)	
		PCM-9365EV-4GS3A1E : 0.44A @ 12V (5.28W)	
		PCM-9365N-4GS8A1E : 0.509A @ 12V (6.108W)	
	Power Consumption (Max, test in HCT)	PCM-9365E-2GS3A1E : 0.49A @ 12V (5.88W)	
		PCM-9365EV-4GS3A1E : 0.554A @ 12V (6.648W)	
Environment	Power Management	ACPI	
	Battery	Lithium 3 V / 210 mAH	
	Operational	0 – 60° C with 0.7m/s air flow (32 – 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)	
	Non-Operational	-40° C – 85° C and 60° C @ 95% RH Non-Condensing	
Physical Characteristics	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"	
	Weight	0.54kg (1.19lb), weight of total package	
	Height	Top Side: 19.5 mm; Bottom Side: 7.8 mm; PCB: 1.6 mm	

* The specification is supported by request

Block Diagram

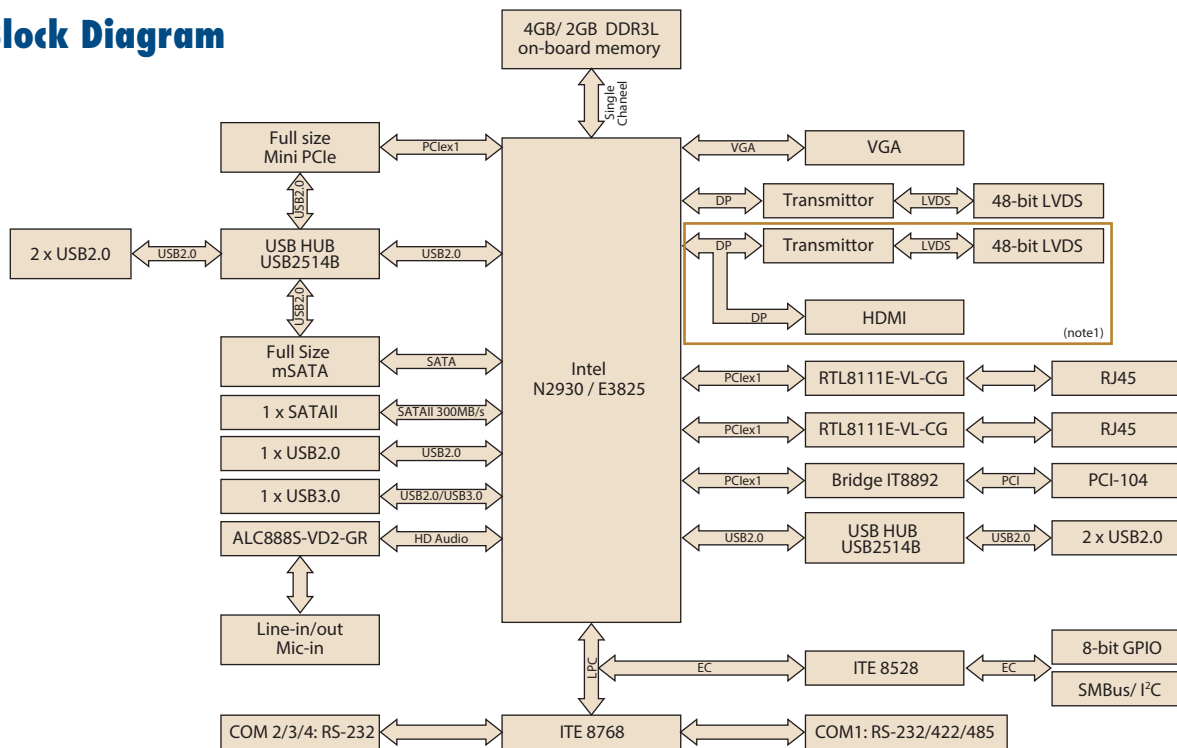

Note1: Supported by request

Ordering Information

Part No.	CPU	Onboard Memory	LVDS	VGA	GbE	Audio	RS-232/422/485	RS-232	USB 3.0	USB 2.0	SATAII	Mini PCIe	mSATA	PCI-104	Power connector	Thermal Solution*	Operating Temp.
PCM-9365E-2GS3A1E	Intel E3825 1.33GHz 6W	2GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	0 ~ 60° C
PCM-9365EV-4GS3A1E	Intel E3825 1.33GHz 6W	4GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	0 ~ 60° C
PCM-9365N-4GS8A1E	Intel N2930 1.83GHz 7.5W	4GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	0 ~ 60° C
PCM-9365EZ22GS3A1E	Intel E3825 1.33GHz 6W	2GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	-40~85° C
PCM-9365NZ24GS8A1E	Intel N2930 1.83GHz 7.5W	4GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	-40~85° C

Note: Passive=fanless; Active=with fan

Packing List

Part No.	Description	Quantity
	PCM-9365 SBC	1
	Startup Manual	1
1701200220	RS-232 COM3/4 cable, F Cable 2*10P-2.0/D-SUB 9P(M)*2 22CM	1
1700018785	SATA 35cm power cable	1
1700019414	RS-232 COM2 Cable D-SUB 9P(M)/2*5P-2.0 30cm	1
1700018730	USB Cable 2*5P-2.0/USB-A(F)*2 25CM F/9	2
1700008941	M Cable SATA 7P/SATA 7P 32CM C=R 180/180D W/Lock	1
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9689000002	mini Jumper pack	1
1960067897T001	Heatsink for PCM-9365 (131.24 x 69.21 x 19.5 mm)	1
1960067897T011	Heatsink for PCM-9365Z&Z2 series only (131.24 x 69.21 x 19.5 mm)	1

Rear I/O View



Optional Accessories

Part No.	Description
1960070254T001	Heat spreader
1653130421	PCI-104 connector 120-pin (Long pin)

Embedded OS/API

Embedded OS/API	Part No.	Description
WES8	TBD	
WES7	2070013531	WES7E PCM-9365 X64 V5.6.8 Eng
WEC7	TBD	
Linux		Kernel 3.x
VxWorks		6.9.3.3
Android		Kit Kat 4.4
Software API		iManager (SUSI 4.0)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN](#) [20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)