

# PPC-3151W

## 15.6" Fanless Widescreen Panel PC with Intel® Core™ i5-7300U Processor



### Features

- 15.6" true-flat Full HD LCD panel with projected capacitive touchscreen, anti-glare coating
- Intel® Core™ i5-7300U(default); i7-7600U/i3-7100U(optional) processor with fanless system design
- Supports PCIe x4 or PCI expansion
- 1 x isolated RS-422/485 with auto flow
- Wide input power range (9 ~ 32 V<sub>DC</sub>)
- Dual Gigabit Ethernet with IEEE1588 support
- 3 x Independent displays
- 1 x M.2 bay (2242) for storage only
- 1 x TPM 2.0 internal support (optional)
- Supports VESA 100 mounting interface



### Introduction


PPC-3151W is a new generation industrial interactive panel PC with a 15.6" TFT full HD LCD 1920 x 1080 resolution, which features a flat, sleek design to greatly reduce maintenance effort. Pre-installed Intel® Core™ i processor and designed fanless architecture, PPC-3151W provide high performance and reliable system for factory automation or variety of industrial applications. Furthermore, with the provision of multiple I/O, dual Intel® Gigabit ethernet, PCI/PCIe expansion, PPC-3151W ensures easy integration and connectivity.

### Specifications

<b>System</b>	CPU	Intel® Core™ i5-7300U dual core (default); i7-7600U/i3-7100U (optional)
	Frequency	2.6 GHz, up to 3.5 GHz with turbo
	L2 Cache	3 MB
	Memory	1 x SODIMM DDR4 1866/2133 MHz, (max. 16 GB)
	Storage	1 x 2.5" SATA bay 1 x M.2 bay (size: 22 x 42 mm, socket 2 B key, for storage only)
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet (Intel® I211-AT; Intel® I219LM)
	I/O	2 x RS-232, 1 x RS-422/485 with 1K V <sub>DC</sub> isolation Either 2 x RS-232 or 1 x RS-232 + 1 x GPIO(TTL, 8 pin programmable) on right side (optional module) 4 x USB 3.0 1 x Line-out, 1 x Mic-in 1 x DB15 VGA 1 x Display Port (1.2) 1 x TPM 2.0 internal(optional)
	Expansion	1 x Mini PCIe 1 x PCIe x 4 (default); 1 x PCI (in the accessory box)
	Watchdog Timer	255 timer levels, set up by software
	Speaker	2 x 1W
<b>Physical Characteristics</b>	Dimensions	419.7 x 269 x 59 mm (16.5 x 10.6 x 2.3 in)
	Weight	5.4kg (11.9 lb)
<b>OS Support</b>	OS Support	Microsoft® Windows 10 (64-bit), Win 10 LTSC, Linux
<b>Power Consumption</b>	Input Voltage	9 ~ 32 V <sub>DC</sub>
	Power Consumption	i5-7300U 65W( Burn-in test 8.1 in Windows 10 64bit)
<b>LCD</b>	Display Type	15.6" TFT LCD (LED backlight)
	Max. Resolution	1920 x 1080
	Viewing Angle	85 (Left), 85 (Right), 85(Up), 85(Down)
	Luminance (cd/m <sup>2</sup> )	450
	Contrast Ratio	800
	Backlight Lifetime	50,000 hr (min.)
<b>Touchscreen</b>	Touch Type	Multi-touch projected capacitive
	Light Transmission	88 % ± 2 %
	Controller	USB interface
<b>Environment</b>	Operating Temperature	0 ~ 50 °C (32 ~ 122 °F) with SSD; 0 ~ 40 °C (32 ~ 104 ° F) with HDD
	Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
	Relative Humidity	10 ~ 95% @ 40 °C (Non-Condensing)
	Shock	Operating 10 G Peak Acceleration (11 ms Duration), Follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD; 2Grms @with SSD, Follows IEC 60068-2-64
	EMC	CE, FCC Class B, BSMI
	Safety	CB, UL, CCC, BSMI
Front Panel Protection	IP65 compliant	

## Dimensions

Unit: mm

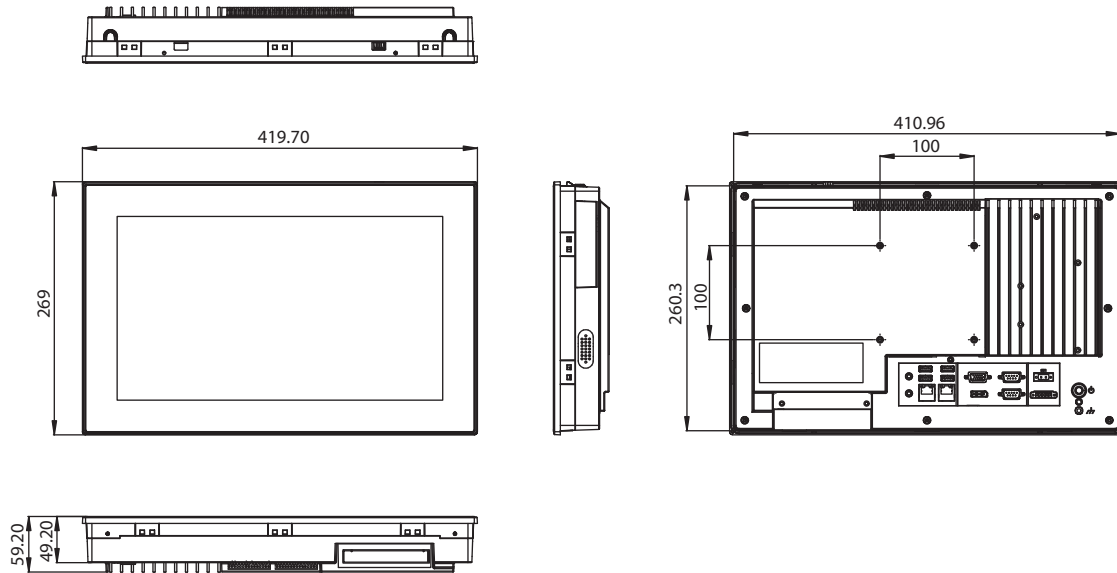


Cut-Out Dimension:413.00 x 262.00 mm

## Ordering Information

Part Number	Description
PPC-3151W-P75A	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i5-7300U
PPC-3151W-P75AU	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i5-7300U , for U.S. only
96PSA-A90W190T-3	A/D 100-240V 90W 19V C6 TERMINAL 2 PIN 62368
1700001524	POWER Cord 3P UL 10A 125V 180cm
170203183C	POWER Code 3P Europe (WS-010+083)183cm
1700008921	POWER CORD 3P/3P POWER SUPPLY 1.8M PSE
96CB-POWER-B-1.8MB	Power code 3P CCC(China) 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series
PPC-ARM-A03	ARM VESA Standard (A-CLEVER) for PPC series
PPC-WLAN-C1E	M.2 Wi-Fi Module with Antenna cable support 2T2R
98R3P321100	Optional module on right side: Either 2 x RS-232 or 1 x RS-232 + 1 x GPIO(TTL, 8 pin programmable)
98R3P321110	TPM 2.0 module

## I/O View

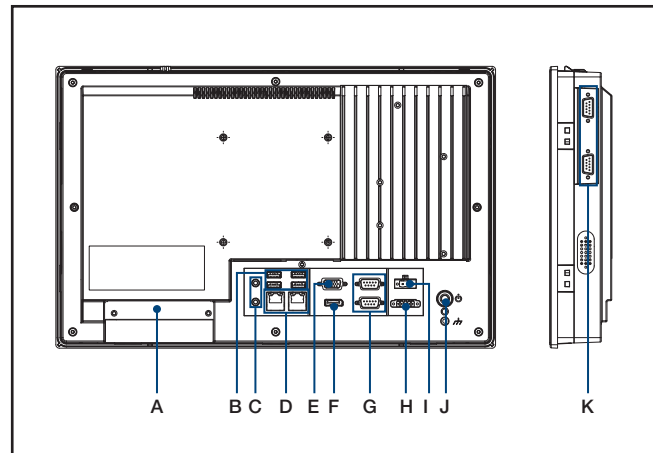

- A. 1 x Expansion slot (PCI or PCIe x1)
- B. 4 x USB3.0
- C. 1 x Mic-In/Line-Out
- D. 2 x Intel Gigabit Ethernet
- E. 1 x VGA
- F. 1 x DisplayPort
- G. 2 x RS-232
- H. 1 x Isolated RS-422/485
- I. 1 x DC inlet and AT/ATX switch
- J. 1 x Power button
- K. 2 x RS-232 (on right side optional)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Panel PCs category](#):*

*Click to view products by [Advantech manufacturer](#):*

Other Similar products are found below :

[GOT-5100T-832](#) [GOT-3126T-832](#) [BYARM-W071-PC](#) [STC-15WR-E3950,4G,64GB M.2](#) [STC-15WP-E3950,4G,64GB M.2](#) [POC-W152-C11D-ACE](#) [PWS-770-VMOUNT00E](#) [PWS-870-CHDC00E](#) [PWS-870-UCOVER00E](#) [TPC-31T-E3AE](#) [TREK-572-LWB7B0E](#) [ESRP-HMI-TPC1551](#) [ESRP-HMI-TPC1251](#) [ESRP-HMI-TPCB200](#) [BYARM-181-PC](#) [BYTEM-121-PC](#) [IDOOH-210-IR](#) [AFL3-W15A-BT-J1/PC/2G-R13](#) [IOVU-07F-AD-WBC-R10](#) [003002400100](#) [1050387](#) [SPTM20XP](#) [XPTB10X](#) [UTC-W101BF-ABI0E](#) [UTC-W101B-ABI0E](#) [UTC-W101B-AWI0E](#) [UTC-532C-GE](#) [UTC-532A-GE](#) [UTC-520A-PE](#) [UTC-520A-GE](#) [TREK-722R-A1E](#) [TREK-570-00A0E](#) [PWS-870-7S6G4P5F0E](#) [PPC-174T-WL-MTE](#) [110070048](#)