


SQF-SLM 630

SATA III (6.0Gb) Half-Slim Module

SQF-S10 630

SATA III (6.0Gb) CFast

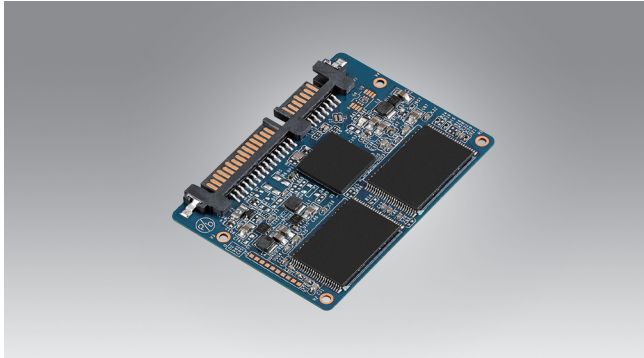

RoHS COMPLIANT 2002/95/EC CE FCC



RoHS COMPLIANT 2002/95/EC CE FCC



Features

- MO-297 Half-Slim SATA module
- Compliant with SATA III and SATA v 3.0 standard
- Supports 72 bit ECC correct per 1K Byte data
- Low power consumption SATA III storage module
- Shock resistance, anti-vibration and low power consumption
- GUI management tool & software API package
- Supports hardware write protect

Features

- Compliant with standard CFast card Type 1 specifications
- Interface: SATA Gen. 3
- Supports 72 bit ECC correct per 1K Byte data
- Universal wear-leveling and bad block management
- Shock resistance, anti-vibration and low power consumption
- GUI management tool & software API package

Specifications

Connector Type	Standard 7+15-pin SATA connector
Flash Type	SLC / Ultra MLC / MLC
Capacity	SLC: 1 to 64GB Ultra MLC: 8 to 128GB MLC: 4 to 256GB
Transfer Mode	SATA III (6.0 Gbps)
Max. Power Consumption	370 mA
Sustained R/W Performance*	SLC and MLC up to 510/150 MB/sec
Operating Temperature	Commercial grade: 0 to +70 °C Industrial grade: -40 to +85 °C
Shock Resistance	1,500 G, peak / 0.5 ms
Vibration Resistance	20 G, peak / 80 ~ 2000 Hz
Dimensions (mm)	54.0 x 39.0 x 4.5

* These values are for reference only; they may change according to the flash memory used.

Specifications

Connector Type	CFast Type 1 Connector
Flash Type	SLC / Ultra MLC / MLC
Capacity	SLC: 1 to 32GB Ultra MLC: 4 to 64GB MLC: 4 to 128GB
Transfer Mode	SATA III (6.0 Gbps)
Sustained R/W Performance *	SLC: up to 500/150 MB/sec MLC: up to 250/100 MB/sec
Operating Temperature	Commercial grade: 0 to +70 °C Industrial grade: -40 to +85 °C
Shock Resistance	1,500 G, peak / 0.5 ms
Vibration Resistance	20 G, peak / 80 ~ 2000 Hz
Dimensions (mm)	42.8 x 36.4 x 3.3

* These values are for reference only; they may change according to the flash memory used.

Ordering Information

PN	Description
SQF-SLMS1-1G-S9C	SQFlash 630 series SATA Slim 1 GB SLC, 1-CH (0 ~ 70 °C)
SQF-SLMS1-1G-S9E	SQFlash 630 series SATA Slim 1 GB SLC, 1-CH (-40 ~ 85 °C)
SQF-SLMS2-2G-S9C	SQFlash 630 series SATA Slim 2 GB SLC, 2-CH (0 ~ 70 °C)
SQF-SLMS2-2G-S9E	SQFlash 630 series SATA Slim 2 GB SLC, 2-CH (-40 ~ 85 °C)
SQF-SLMS4-XG-S9C	SQFlash 630 series SATA Slim 4/8/16/32/64 GB SLC, 4-CH (0 ~ 70 °C)
SQF-SLMS4-XG-S9E	SQFlash 630 series SATA Slim 4/8/16/32/64 GB SLC, 4-CH (-40 ~ 85 °C)
SQF-SLMU4-XG-S9C	SQFlash 630 series SATA Slim Ultra MLC, DMA, 8/16/32/64/128 GB (0 ~ 70 °C)
SQF-SLMU4-XG-S9E	SQFlash 630 series SATA Slim Ultra MLC, DMA, 8/16/32/64/128 GB (-40 ~ 85 °C)
SQF-SLMM1-4G-S9C	SQFlash 630 series SATA Slim 4 GB MLC, 1-CH (0 ~ 70 °C)
SQF-SLMM1-4G-S9E	SQFlash 630 series SATA Slim 4 GB MLC, 1-CH (-40 ~ 85 °C)
SQF-SLMM2-8G-S9C	SQFlash 630 series SATA Slim 8 GB MLC, 2-CH (0 ~ 70 °C)
SQF-SLMM2-8G-S9E	SQFlash 630 series SATA Slim 8 GB MLC, 2-CH (-40 ~ 85 °C)
SQF-SLMM4-XG-S9C	SQFlash 630 series SATA Slim 16/32/64/128/256 GB MLC, 4-CH (0 ~ 70 °C)
SQF-SLMM4-XG-S9E	SQFlash 630 series SATA Slim 16/32/64/128/256 GB MLC, 4-CH (-40 ~ 85 °C)

Note: X stands for different capacities

Ordering Information

PN	Description
SQF-S10S1-1G-S9C	SQFlash 630 series CFast SLC DMA, 1 GB (0 ~ 70 °C)
SQF-S10S1-1G-S9E	SQFlash 630 series CFast SLC DMA, 1 GB (-40 ~ 85 °C)
SQF-S10S2-xG-S9C	SQFlash 630 series CFast SLC DMA, 2/4/8 GB (0 ~ 70 °C)
SQF-S10S2-xG-S9E	SQFlash 630 series CFast SLC DMA, 2/4/8 GB (-40 ~ 85 °C)
SQF-S10S4-xG-S9C	SQFlash 630 series CFast SLC DMA, 16/32/64 GB (0 ~ 70 °C)
SQF-S10S4-xG-S9E	SQFlash 630 series CFast SLC DMA, 16/32/64 GB (-40 ~ 85 °C)
SQF-S10U1-2G-S9C	SQFlash 630 series CFast UltraMLC DMA, 2 GB (0 ~ 70 °C)
SQF-S10U1-2G-S9E	SQFlash 630 series CFast UltraMLC DMA, 2 GB (-40 ~ 85 °C)
SQF-S10U2-xG-S9C	SQFlash 630 series CFast UltraMLC DMA, 4/8/16/32/64 GB (0 ~ 70 °C)
SQF-S10U2-xG-S9E	SQFlash 630 series CFast UltraMLC DMA, 4/8/16/32/64 GB (-40 ~ 85 °C)
SQF-S10M1-4G-S9C	SQFlash 630 series CFast MLC DMA, 4 GB (0 ~ 70 °C)
SQF-S10M1-4G-S9E	SQFlash 630 series CFast MLC DMA, 4 GB (-40 ~ 85 °C)
SQF-S10M2-xG-S9C	SQFlash 630 series CFast MLC DMA, 8/16/32/64/128 GB (0 ~ 70 °C)
SQF-S10M2-xG-S9E	SQFlash 630 series CFast MLC DMA, 8/16/32/64/128 GB (-40 ~ 85 °C)

Note: X stands for different capacities

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Memory Cards](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[SQF-ISDS1-8G-21C](#) [USDCOEM-32GB](#) [LMEX1L128GG2](#) [LMEX1L256GG2](#) [LMEX1L016GG2](#) [LMEX1L032GG2](#) [LMEX1L064GG2](#)
[SDSDQAF4-032G-I](#) [SDSDQAF4-256G-I](#) [AP-CF016GKBNS-ETNRG](#) [CFLSH-016SDG](#) [MS-C6-8G](#) [HMC-EF283](#) [SDCFXPS-032G-X46](#)
[SDCFXSB-128G-G46](#) [SDSDQB-032G-B35](#) [SDSDQM-032G-B35A](#) [SDU4GDMGRB](#) [SDU4GDPGRB](#) [5788667-1-CUT-TAPE](#) [RP-](#)
[SMLE32DA1](#) [SDC4GDPGRB](#) [2729389](#) [VTDCFBPI004G](#) [SDSDAF3-016G-XI](#) [2403484](#) [VTDS41PI008G](#) [SDSDAF3-016G-I](#)
[VSFCS2CC060G](#) [SDSDAF3-032G-XI](#) [SDSDAD-016G](#) [SDSDAF3-008G-XI](#) [SDSDAF3-008G-I](#) [SDSDQAB-016G-J](#) [VTDCFBPI008G](#)
[M1A0-0160R12](#) [M1A0-0320R12](#) [M1A4-0320R12](#) [M1AA-0160R12](#) [M1AA-0320R12](#) [M1AA-0640R12](#) [M1AA-1280R12](#) [SDCFXPS-256G-](#)
[X46](#) [SDSDXPK-128G-GN4IN](#) [SDSDXXG-032G-GN4IN](#) [SDSDXXY-064G-GN4IN](#) [SDSDXXY-128G-GN4IN](#) [SDSDXXY-512G-GN4IN](#)
[SDSQXA1-128G-GN6MA](#) [SDSQXA1-256G-GN6MA](#)