


**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
12.000000MHz

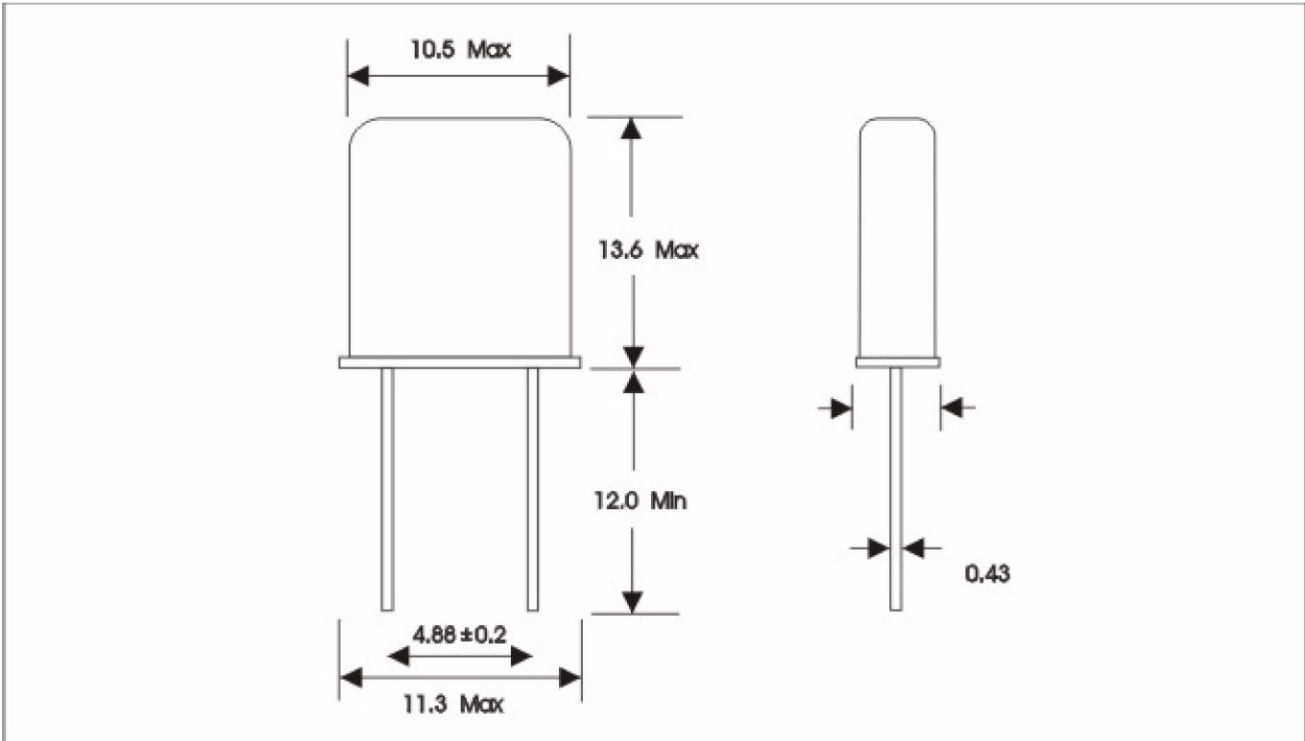

| | |
|-----------------------|-------------------------|
| Holder Style | HC-49/U |
| Mode | Fundamental |
| Adjustment Tolerance | ± 30PPM at 25°C |
| Temperature Stability | ± 50 PPM |
| Operating Temp. Range | -10°C to +60°C |
| Load Capacitance | 30 pF |
| ESR | 25 Ohm |
| Marking | Mark AELX188L\FREQ+WWYY |

| Amdt Date | Change Note | AEL Code | |
|-----------|-------------|------------------|---|
| | | X12M000000L188 | |
| | | Issue Ref | A |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ael manufacturer](#):

Other Similar products are found below :

[O16M000000L021](#) [X9M830400L035](#) [O25M000000L684](#) [O100M000000L010](#) [O20M000000L046](#) [O64M000000L153](#)
[E3SB16.0000F09G11AE](#) [O25M000000L063](#) [X14M000000L001](#) [O3M686400L120](#) [O25M000000L059](#) [X5M000000L001](#) [X9M830400L152](#)
[O40M000000L125](#) [X4M194304L056](#) [X50M000000L001](#) [X12M000000L188](#) [X4M608000L075](#) [O32M000000L097](#) [O40M000000L126](#)
[X15M000000L002](#) [O4M000000L134](#) [O8M000000L166](#) [O20M000000L676](#) [X32K768S021](#) [X307K200L001](#) [X40M000000L104](#)
[O8M000000L642](#) [C8M000000L004](#) [X1M843200L010](#) [C4M000000L001](#) [X19M660800L307](#) [X20M000000L010](#) [X32K768S019](#)
[X7M372800L027](#) [O10M000000S023](#) [X32K768L009](#) [C8M000000S014](#) [C16M000000L003](#) [X32K768L104](#)