

SolidMatrix® Surface Mount Fuses

HI Series (High Inrush), 1206 Size



Clearing Time Characteristics:

% of Current Rating	Clearing time at 25°C	
	Time	Time
100%	4 hours min.	
200%	1 second min.	60 seconds max.
1000%(1.0 A -5.0 A)	0.0002 seconds min.	0.02 seconds max.
1000%(6.0 A -8.0 A)	0.0002 seconds min.	0.04 seconds max.

Agency Approval:

Recognized Under the Components Program of UL.
File Number: E232989.

Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) ¹	Nominal I^2t (A^2s) ²	Marking (Optional) ³
F1206HI1000V063T	1.0	63	50 A at rated voltages	0.340	0.11	E
F1206HI1500V063T	1.5	63		0.150	0.33	G
F1206HI2000V063T	2.0	63		0.090	0.80	I
F1206HI2500V032T	2.5	32		0.065	1.19	J
F1206HI3000V032T	3.0	32		0.035	1.35	K
F1206HI3500V032T	3.5	32		0.029	1.84	L
F1206HI4000V032T	4.0	32		0.023	2.74	M
F1206HI4500V032T	4.5	32		0.021	3.20	T
F1206HI5000V032T	5.0	32	0.017	5.50	N	
F1206HI6000V024T	6.0	24	80 A at rated voltage	0.013	12.5	O
F1206HI7000V024T	7.0	24		0.010	30.0	P
F1206HI8000V024T	8.0	24		0.009	60.0	R

1. Measured at $\leq 10\%$ rated current and 25°C ambient.

2. Melting I^2t at 1000% of current rating.


3. Green Marking Character Code.

Features:

- High inrush current withstanding capability
- Ceramic Monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to +125°C (with de-rating)

Shape and Dimensions:


Unit	Inch	mm
L	0.126 \pm 0.008	3.20 \pm 0.20
W	0.063 \pm 0.008	1.60 \pm 0.20
T	0.038 \pm 0.008	0.97 \pm 0.20
B	0.020 \pm 0.010	0.51 \pm 0.25



SolidMatrix[®] Surface Mount Fuses

HI Series (High Inrush), 1206 Size


Average Pre-arcing Time Curves:

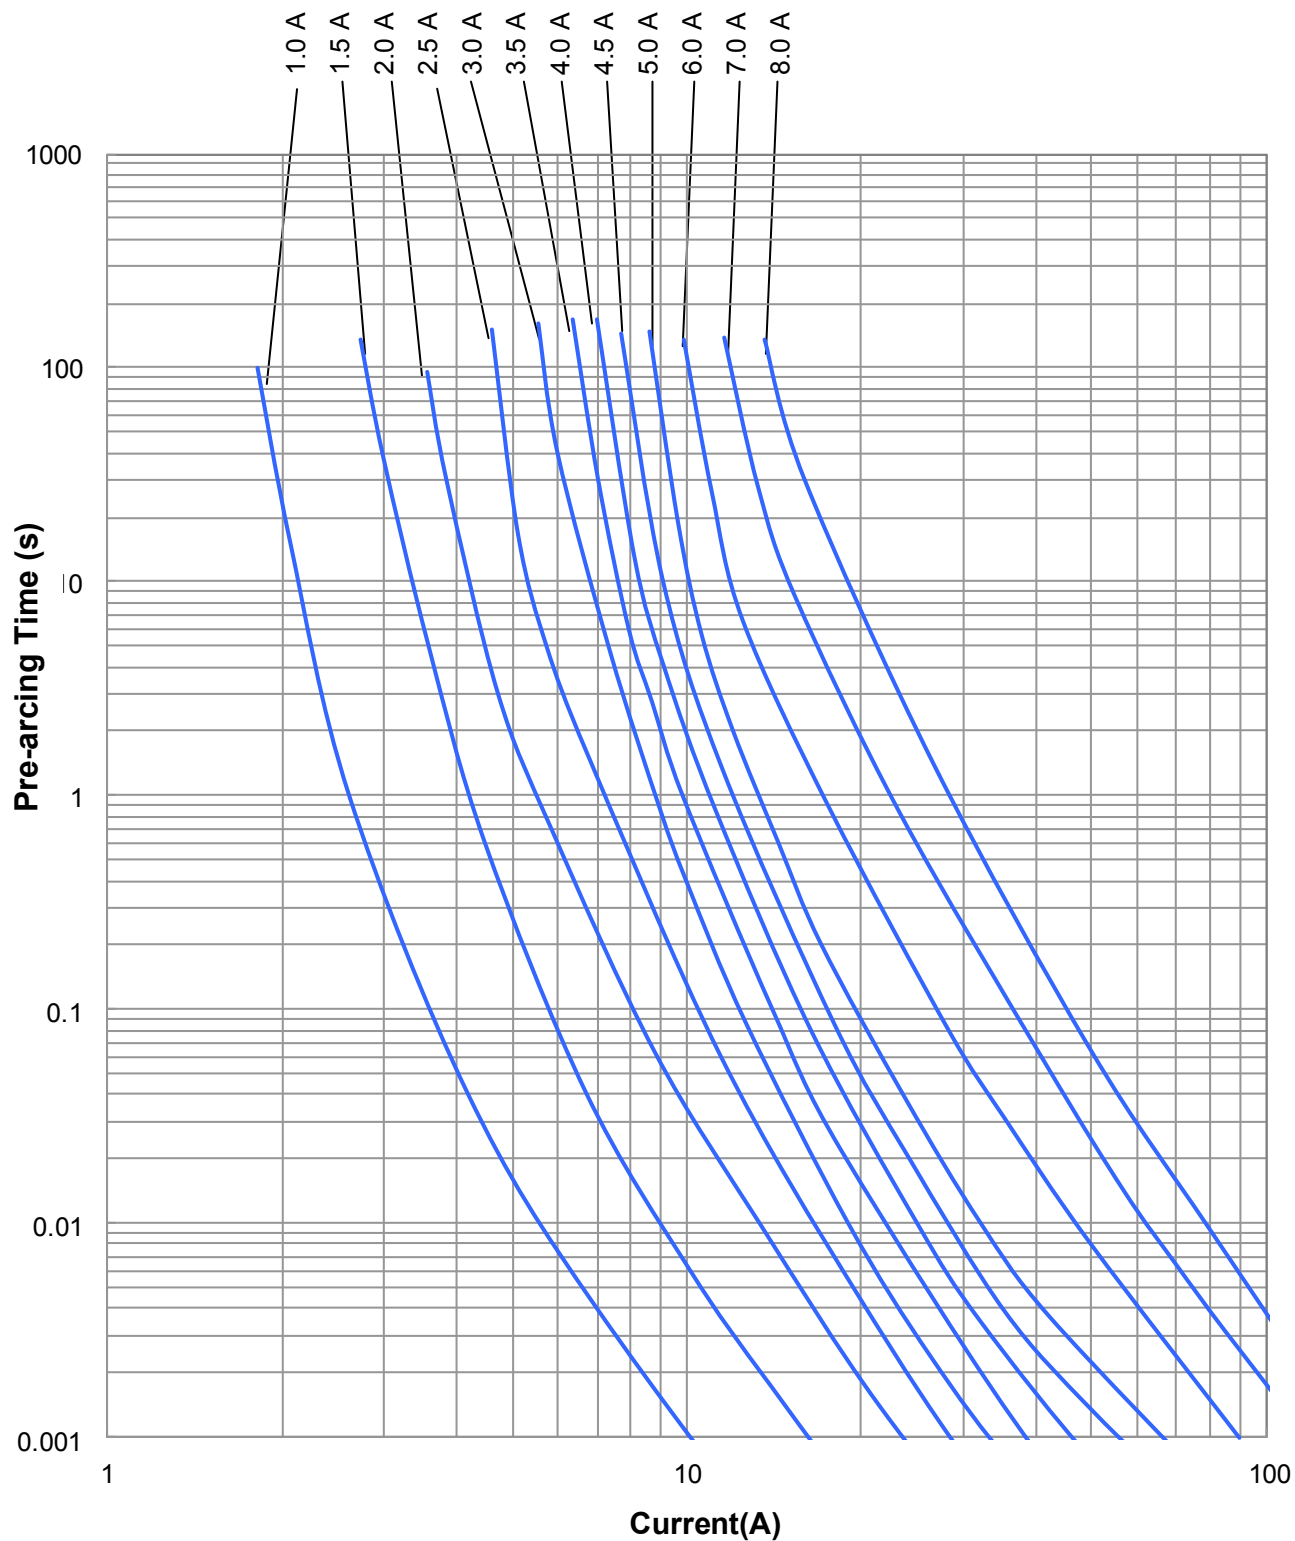

SolidMatrix[®] Surface Mount Fuses

HI Series (High Inrush), 1206 Size

Average I^2t vs. t Curves:

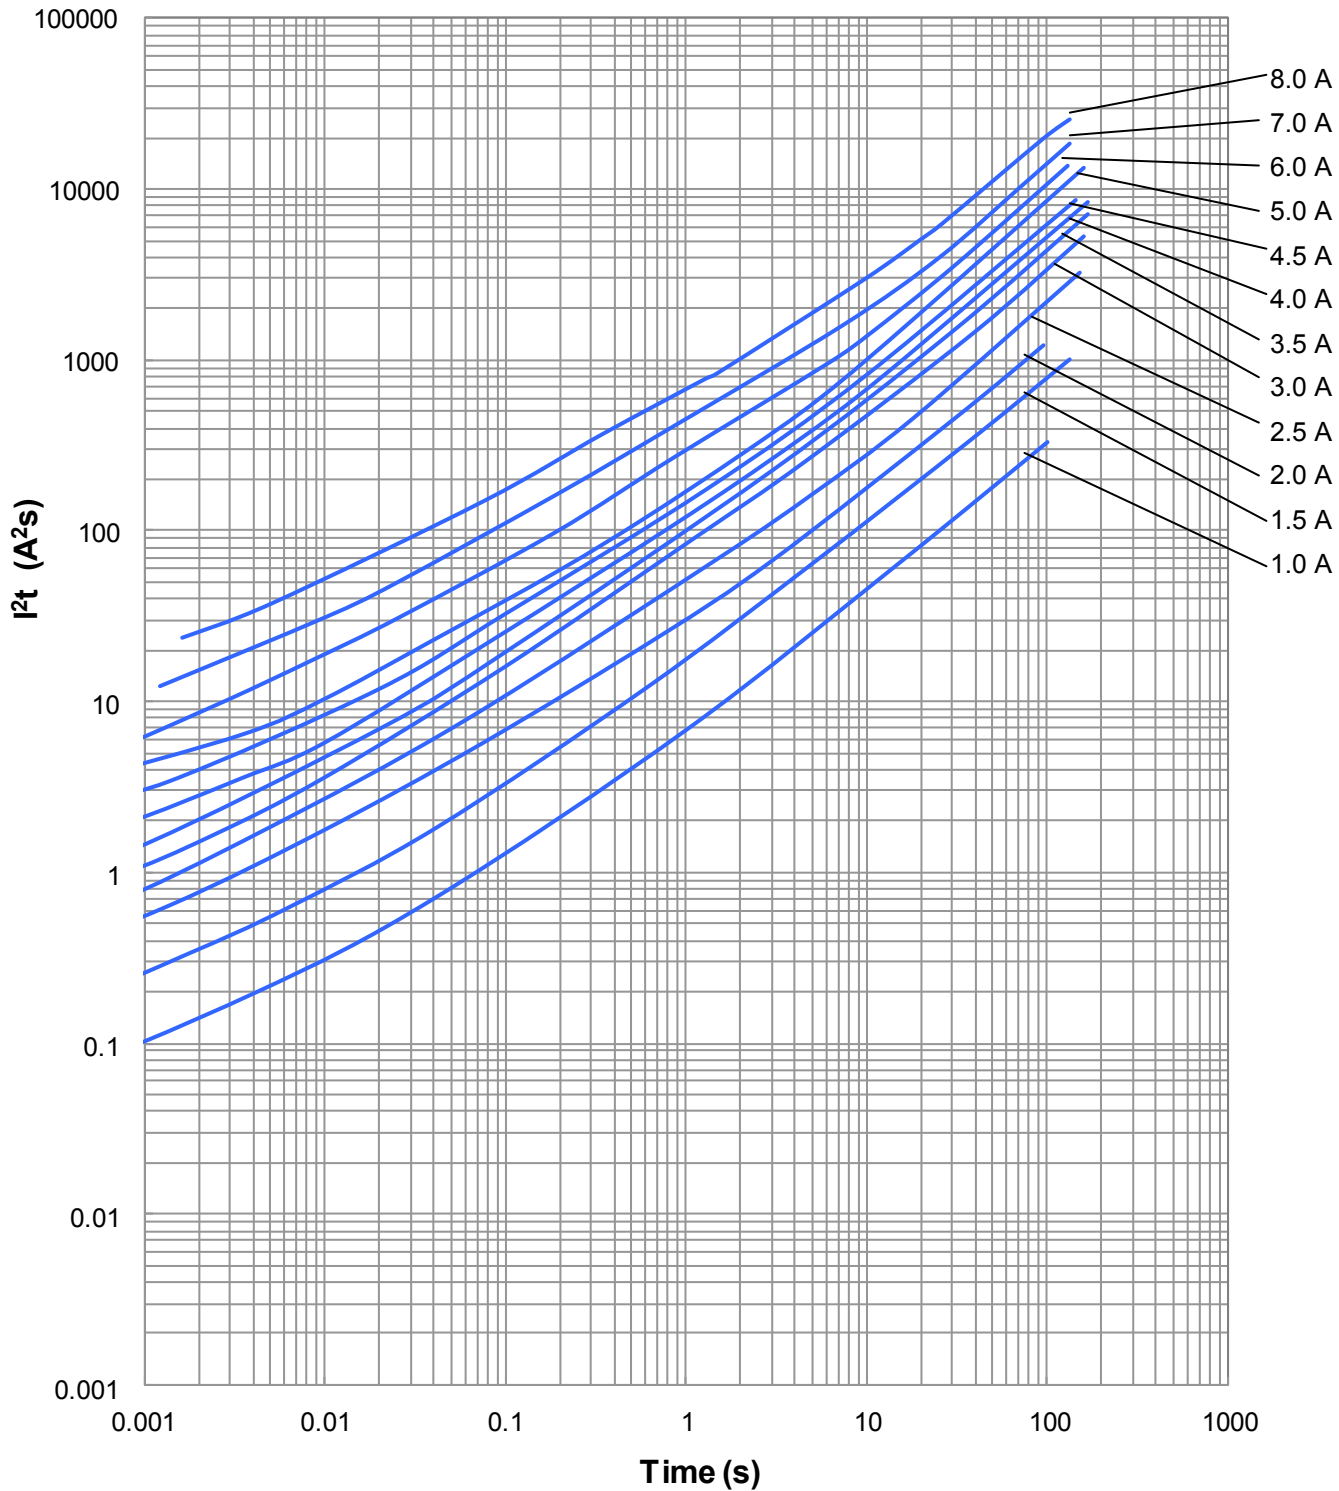

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AEM manufacturer](#):

Other Similar products are found below :

[HRB1206S121P1.50FB](#) [AF2-3.00V125TM](#) [F1206FA8000V032TM](#) [F0603HI4000V032T](#) [F1206FA2000V063TM](#) [F0603FA5000V032TM](#)
[F1206HA10V024TM](#) [F1206FA4000V032TM](#) [PMS1206-100](#) [F1206HC15A0TM](#) [F1206SB5000V032TM](#) [PMS0603-010](#)
[HSP2220SV470V0500](#) [AF1206F3.50TM](#) [HSP2220SV430V0500](#) [PMS0603-005](#) [F1206HI4000V032TM](#) [F1206HC25A0TM](#) [AF1206F1.60TM](#)
[F1206SB1000V063TM](#) [F1206VH6000TM](#) [F1206SB6000V024TM](#) [HSP1812SV470V0500](#) [MF2410F2.000TM](#) [F1218HR200V048T](#)
[F1206FA8000V032T](#) [MF2410F1.600TM](#) [AF2-2.50V125TM](#) [F1206HA20V024TM](#) [PMS0603-035](#) [PMS1206-200](#) [F0603HI7000V032TM](#)
[F1206HI8000V024TM](#) [F0603FA6000V024TM](#) [F1206HB12V024TM](#) [PMS2920-150](#) [F1206FA1500V063T](#) [F0603FA0500V063T](#) [PMS0805-](#)
[010](#) [F0603FA2000V032T](#) [T0603FF4000TM](#) [F0603HI2000V032T](#) [PMS0603-025](#) [F1206FA0500V063TM](#) [F1206SB4000V032TM](#)
[F1206FA0750V063TM](#) [F0603FA4000V032TM](#) [HSP2220SV430V0800](#) [F1206FA5000V032TM](#) [F0603FF0500V032TM](#)