


ATM2320KNSQ

20V N-Channel Enhancement Mode MOSFET

Descriptions

The ATM2320KNSQ is N-Channel logic enhancement mode power field effect transistor which is produced using high cell density advanced trench technology to provide excellent $R_{DS(ON)}$.

This high density process is especially tailored to minimize on-state resistance. The device is particularly suited for low voltage application, and low in-lin power loss are needed in a very small outline surface mount package.




Features

- $R_{DS(ON)} = 14m\Omega$ (typ.) @ $V_{GS}=4.5V$
- $R_{DS(ON)} = 18m\Omega$ (typ.) @ $V_{GS}=2.5V$
- Super high design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and Maximum DC current capability
- This is a full RoHS compliance
- SOP89-3 package design
- ESD Rating:2000V HBM

Applications

- Power Management in Note Book
- Portable Equipment
- Battery Powered System



Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

Parameter		Symbol	Maximum		Units
Drain-Source Voltage		VDS	20		V
Gate-Source Voltage		VGS	± 8		V
Drain Current-Continuous		ID	5		A
Drain Current-Pulsed		IDM	30		A
Power Dissipation		PD	1.5		W
Operating Junction and Storage Temperature Range		TJ,TSTG	150, -55 ~ +150		°C
Parameter		Symbol	Typ	Max	Unit
Maximum Junction-to-Ambient	t ≤ 10s	RθJA	64	83	°C/W
Maximum Junction-to-Ambient	Steady-State		89	120	°C/W
Maximum Junction-to-Lead	Steady-State	RθJL	53	70	°C/W

ATM2320KNSQ

Electrical Characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static Parameters						
Drain-Source breakdown voltage	BVDSS	ID=250uA, VGS=0V	20	-	-	V
Zero Gate voltage drain current	IDSS	VDS=16V, VGS=0V	-	-	1	uA
Gate-Body leakage current	IGSS	VDS=0V, VGS=±4.5V	-	-	±1	uA
		VDS=0V, VGS=±8V			±10	uA
Gate Threshold voltage	VGS(th)	VGS=VDS, ID=250uA	0.4	0.6	1	V
On state drain current	ID(ON)	VGS=4.5V, VDS=5V	30	-	-	A
Static Drain-source on-resistance	RDS(on)	VGS=4.5V, ID=5A		14	25	mΩ
		VGS=2.5V, ID=3A		18	35	mΩ
Forward Transconductance	gFS	VDS=5V, ID=5A	-	31	-	S
Diode Forward Voltage	VSD	Is=1A, VGS=0V	-	0.7	1.3	V
Maximum Body-Diode Continuous Current	Is		-	-	2.5	A
Dynamic Parameters						
Input Capacitance	Ciss	VGS=0V, VDS=10V, f=1MHZ	-	1120	-	pF
Output capacitance	Coss		-	195	-	pF
Reverse transfer capacitance	Crss		-	155	-	pF
Gate resistance	Rg	VGS=0V, VDS=0V, f=1MHZ	-	4.0	-	Ω
Switching Parameters						
Total Gate charge	Qg	VGS=4.5V, VDS=10V, ID=5A	-	16	-	nC
Gate Source charge	Qgs		-	1.7	-	nC
Gate Drain charge	Qgd		-	6.8	-	nC
Turn-on delaytime	tD(on)	VGS=5V, VDD=10V, RL=1.35 Ω, RGEN=3 Ω	-	7.2	-	ns
Turn-on rise time	tr		-	11	-	ns
Turn-off delaytime	tD(off)		-	64	-	ns
Turn-off fall time	tf		-	32	-	ns
Body Diode reverse recovery Time	trr	IF=5A, dI/dt=100A/us	-	32	-	ns
Body diode reverse recovery charge	Qrr	IF=5A, dI/dt=100A/us	-	12	-	nC


Notes:

1. Pulse test: pulse width≤300uS, duty cycle≤2%
2. Static parameters are based on package level with recommended wire bonding


ATM2320KNSQ

Typical Characteristics Curves


Power Dissipation

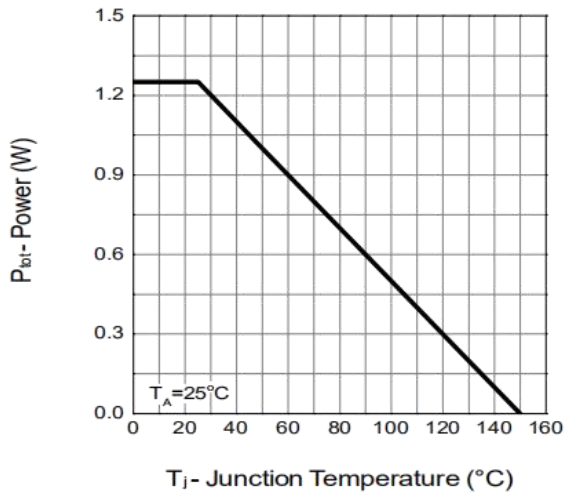


Drain Current

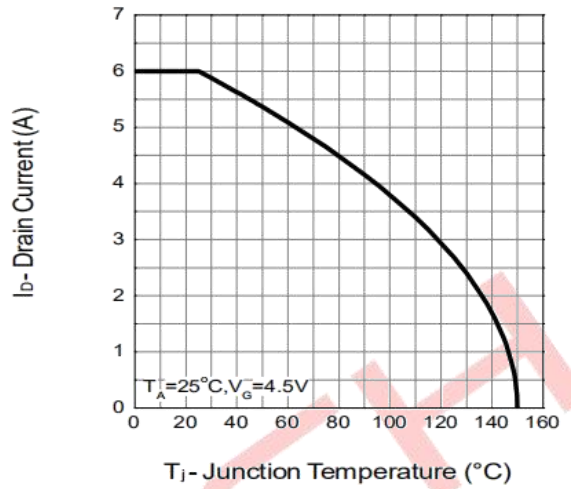


Safe Operation Area

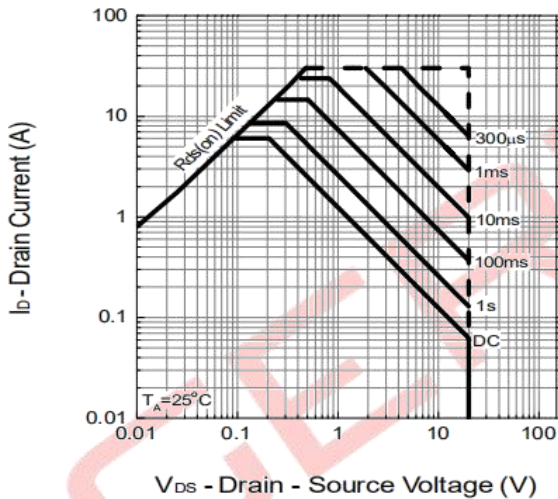


Thermal Transient Impedance

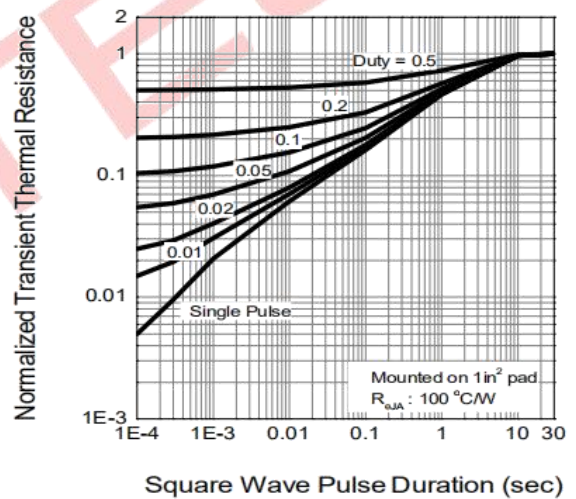


Output Characteristics

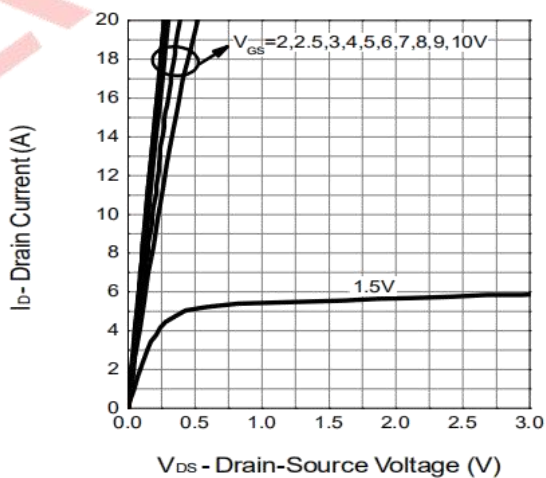


Drain-Source On Resistance

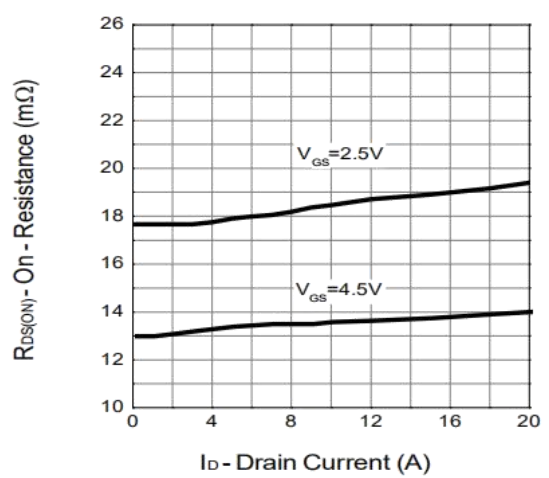


Gate-Source On Resistance

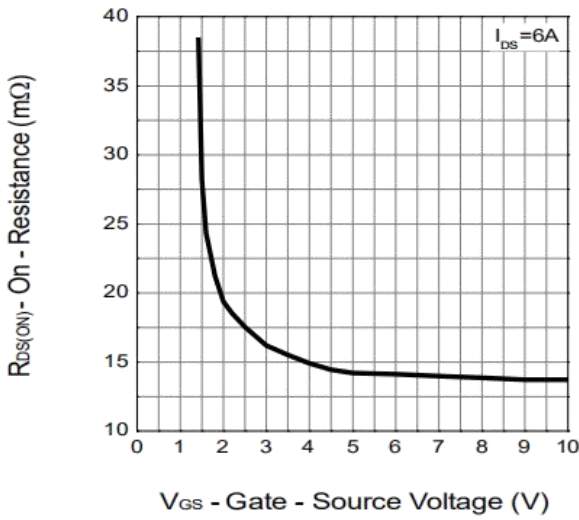


Gate Threshold Voltage

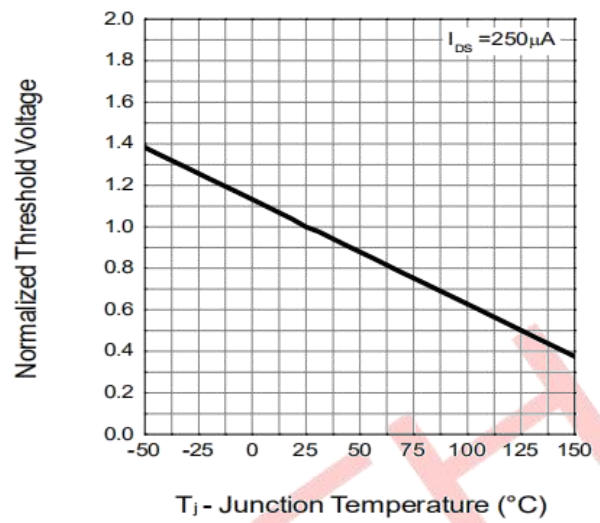


Drain-Source On Resistance

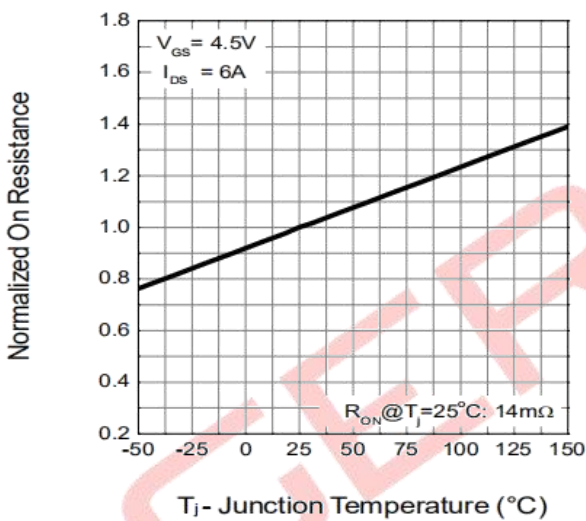


Source-Drain Diode Forward

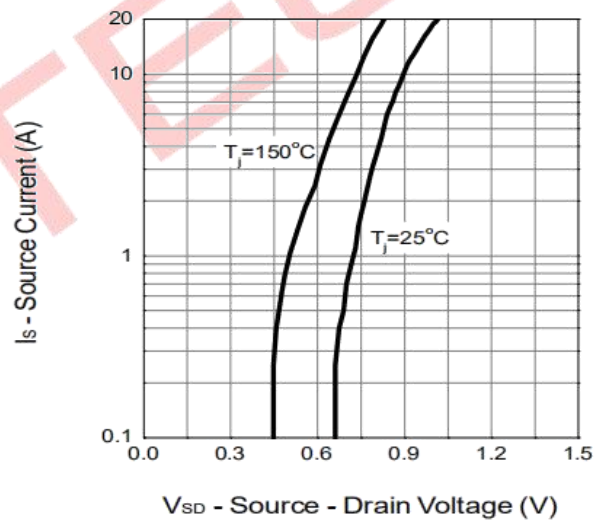

Capacitance

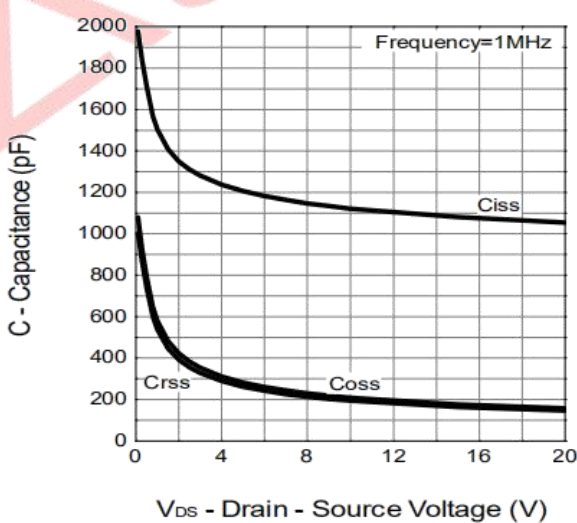


Gate Charge

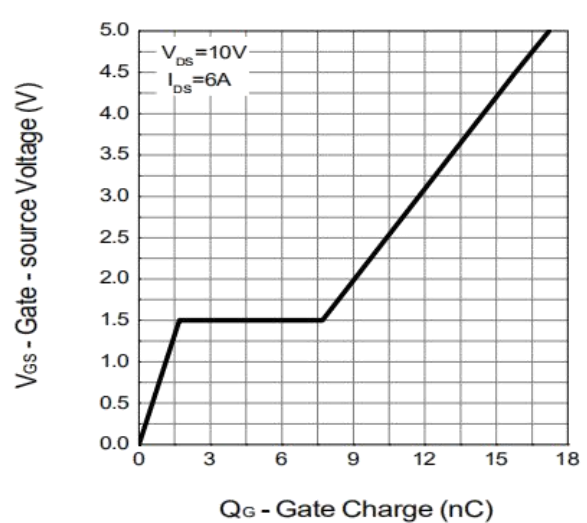

ATM2320KNSQ

Package outline

SOT-89

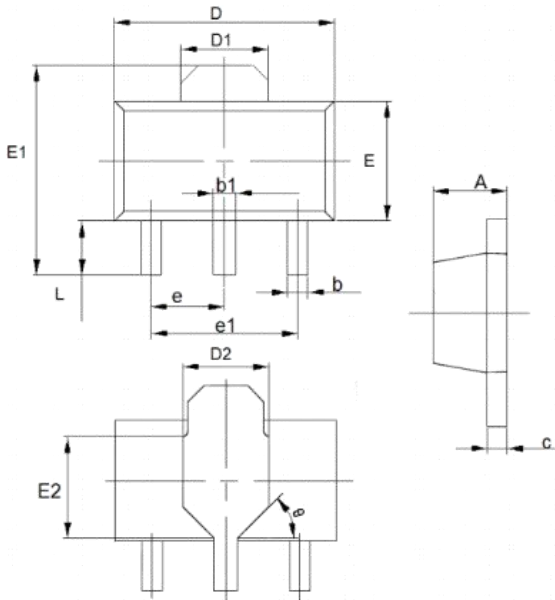

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	1.4	1.6	0.0551	0.0630
b	0.32	0.52	0.0126	0.0205
b1	0.4	0.58	0.0157	0.0228
c	0.35	0.45	0.0138	0.0177
D	4.4	4.6	0.1732	0.1811
D1	1.55(TYP)		0.061(TYP)	
D2	1.75(TYP)		0.0689(TYP)	
e1	3.0(TYP)		0.1181(TYP)	
E	2.3	2.6	0.0906	0.1023
E1	3.94	4.4	0.1551	0.1732
E2	1.9(TYP)		0.0748(TYP)	
e	1.5(TYP)		0.0591(TYP)	
L	0.8	1.2	0.0315	0.0472
θ	45°		45°	

Ordering information

Device	Package	Marking	Shipping
ATM2320KNSQ	SOT-89	2320	1000PCS/Reel&Tape(7inch)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Agertech](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [AOD464](#)
[2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)
[C3M0021120D](#) [DMN6022SSD-13](#)