

SS32BF-AT THRU SS320BF-AT

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

Forward Current-3A

Reverse Voltage-20V to 200V

FEATURES


- ◆ For surface mount applications
- ◆ High forward surge current capability
- ◆ Low power loss, high efficiency
- ◆ Metal silicon junction, majority carriers conduction

MECHANICAL DATA

- ◆ Case: SMBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.057 grams

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

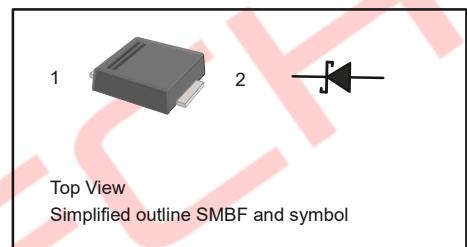

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	SS32BF -AT	SS34BF -AT	SS36BF -AT	SS38BF -AT	SS310BF -AT	SS312BF -AT	SS315BF -AT	SS320BF -AT	UNIT							
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	120	150	200	V							
Maximum RMS Voltage	V _{RMS}	14	28	42	56	70	84	105	140	V							
Maximum DC Blocking Voltage	V _{DC}	20	40	60	80	100	120	150	200	V							
Maximum Average Forward Rectified Current at T _C =100°C	I _{F(AV)}	3.0								A							
Peak Forward Surge Current (Note1)	I _{FSM}	80				70				A							
Maximum Forward Voltage at 3.0 A	V _F	0.55		0.70		0.85		0.95		V							
Maximum DC Reverse Current at Rated DC Blocking Voltage at T _A =25°C T _A =100°C	I _R	0.5 5			0.3 3												
Typical Junction Capacitance (Note2)	C _J	450			400					pF							
Typical Thermal Resistance (Note3)	R _{θJA}	65								°C/W							
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150								°C							

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

3. P.C.B. mounted with 2.0" X 2.0" (5cm X 5 cm) copper pad areas.

SS32BF-AT THRU SS320BF-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

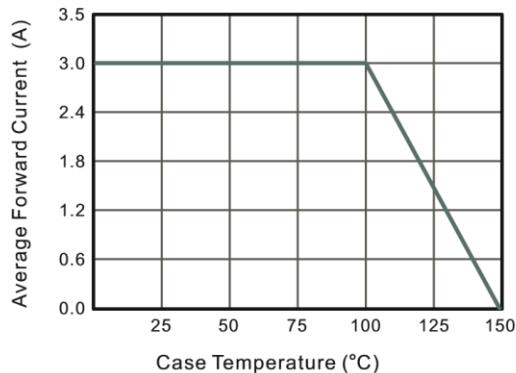


Fig.2 Typical Reverse Characteristics

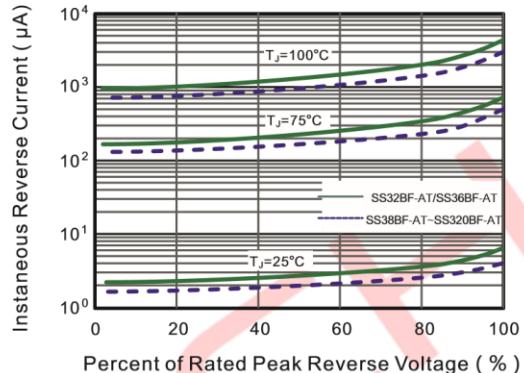


Fig.3 Typical Forward Characteristic

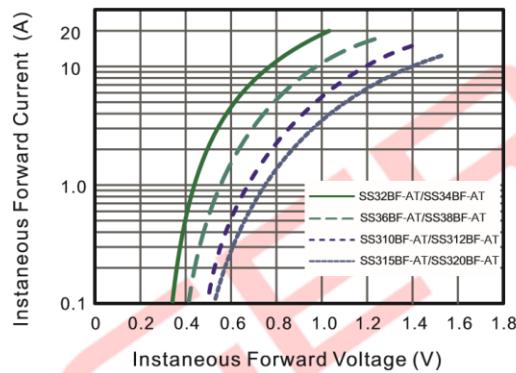


Fig.4 Typical Junction Capacitance

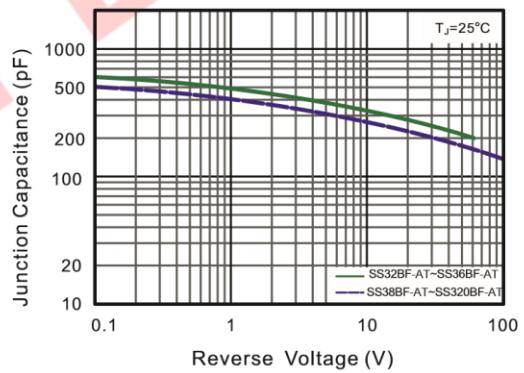


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


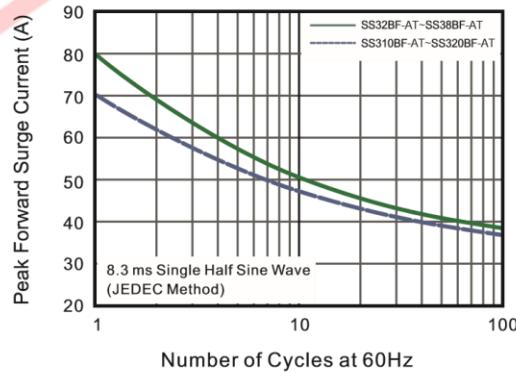



Fig.6 Typical Transient Thermal Impedance

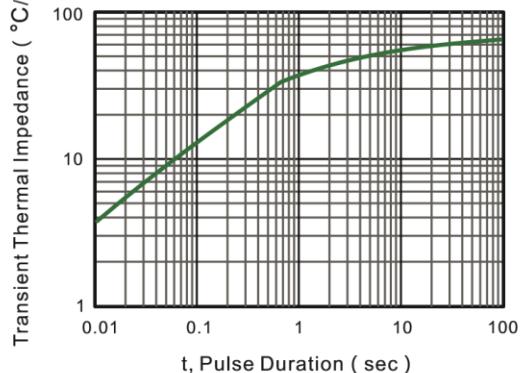

SS32BF-AT THRU SS320BF-AT

PACKAGE OUTLINE

SMBF

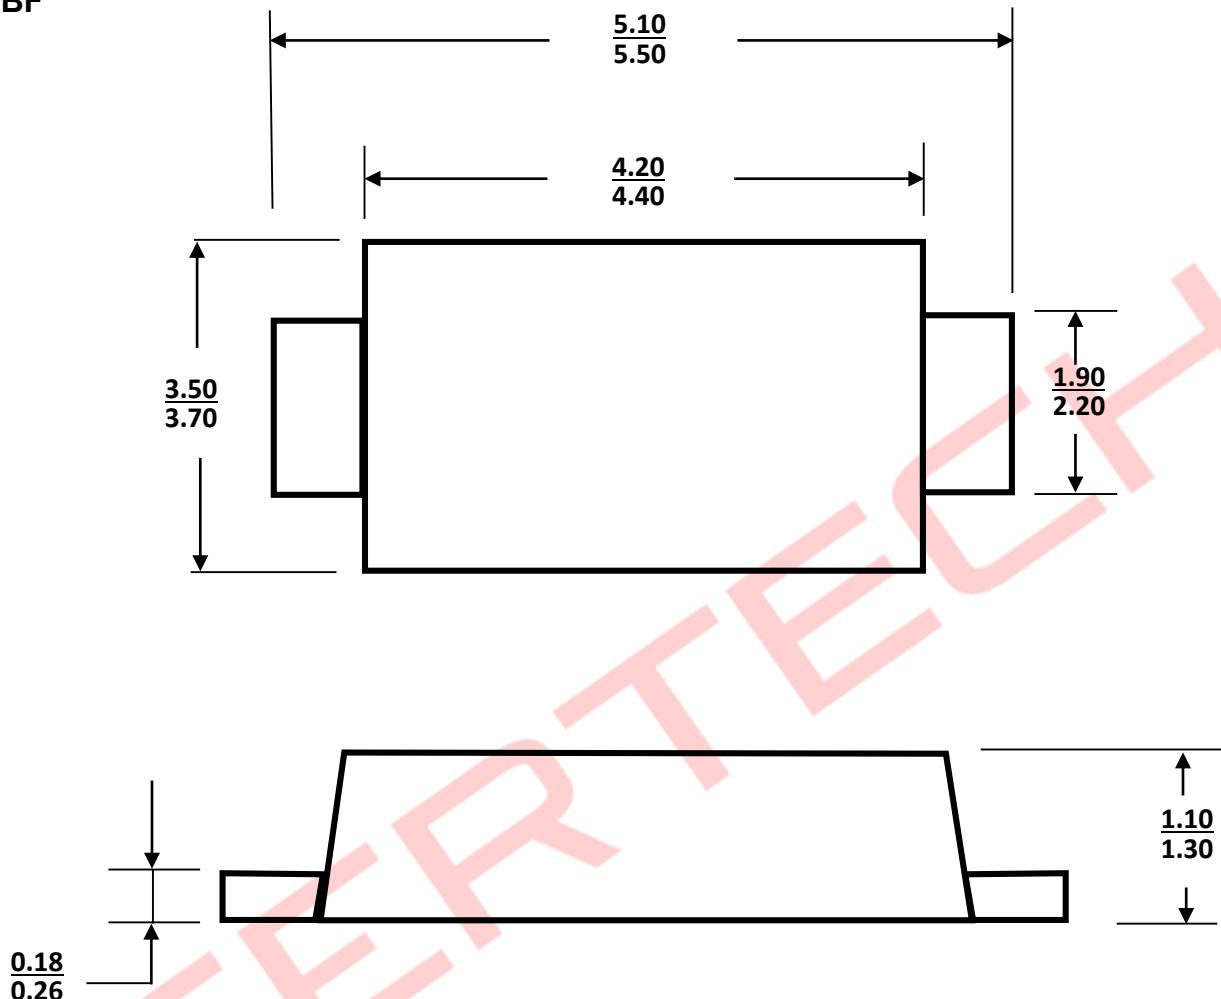

Dimensions in millimeters

ORDERING INFORMATION

Device	Package	Shipping
SS32BF-AT thru SS320BF-AT	SMBF	5,000/Tape & Reel (13 inches)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Agertech manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SBS818-TL-E](#) [SK310-T](#)
[SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)
[DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#)
[NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#)