

Part Numbering System



① Category code

Type	Code	
	2	3
Electrolytic Capacitor	E	
Conductive Polymer	S	

② Series code

Series name	Code	
	2	3
WH	W	H
CD11GE	G	E
CD11GES	G	X
CD11GAS	G	W
CD11GHS	G	S
NR	N	R
PZ	P	Z

③ Voltage code

WV (V _{dc})	Code	
	4	5
2.5	0	E
3	0	D
4	0	G
6.3	0	J
6.8	0	C
7	0	Q
7.5	0	A
10	1	A
12	1	T
16	1	C
25	1	E
35	1	V
40	1	G
50	1	H
63	1	J
80	1	B
100	1	K
120	2	B
160	2	C
180	2	L
200	2	D
220	2	N
250	2	E
315	2	F
350	2	V
380	2	P
400	2	G
420	2	T
450	2	W
500	2	H
550	2	J
600	2	K

④ Capacitance tolerance code

Tol. (%)	Code	
	6	
-10~+10	K	
-20~+20	M	
-10~+30	Q	
-10~+20	V	
0~+20	A	
-5~+20	C	
-10~-20	B	
-5~+5	D	
0~+10	E	
-5~-20	F	
-15~+5	N	

⑤ Capacitance code

Cap (μF)	Code		
	7	8	9
0.10	R	1	0
0.22	R	2	2
0.33	R	3	3
0.47	R	4	7
0.68	R	6	8
1	0	1	0
2.2	2	R	2
3.3	3	R	3
4.7	4	R	7
6.8	6	R	8
10	1	0	0
22	2	2	0
33	3	3	0
47	4	7	0
68	6	8	0
100	1	0	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
1000	1	0	2
2200	2	2	2
3300	3	3	2
4700	4	7	2
6800	6	8	2
10000	1	0	3
22000	2	2	3
33000	3	3	3
68000	6	8	3

⑥ Size code

ΦD (mm)	Code
4	C
5	D
6.3	E
8	F
10	G
11	H
12	J
12.5	W
13	K
14	X
16	L
18	M
19	Z
20	N
22	O
25	P
30	Q
35	R
40	Y
51.6	S
64.3	T
76.9	U
91	V
100	A

L (mm)	Code	
	11	12
5	0	5
7	0	7
11	1	1
12	1	2
16	1	6
20	2	0
25	2	5
30	3	0
35	3	5
40	4	0
46	4	6
50	5	0
60	6	0
80	8	0
100	A	0
115	B	5
120	C	0
130	D	0
140	E	0
160	G	0
200	K	0
220	M	0
236	N	6
250	P	0

⑦ Terminal code

Specification	Code		
	13	14	15
Bulk packing	O	-	-
Taping (SMD Type)	D	0	0
Φ4~8 Taping F=5.0mm	P	5	0
Φ10~12.5 Taping F=5.0mm	B	5	0
Lead Cut L=3.5mm	C	3	5
Lead Cut L=11.0mm	C	B	0
Lead Forming & Cut L=4.5mm	F	-	-
Kink & Cut L=4.5mm	J	-	-
Snap-in type Terminal 4.0mm in length	K	-	-
Three Terminals	T	-	-
Ring clip mounting standard design	A	0	0
Ring clip mounting special design	S	-	-

⑧ Sleeve/Marking code

Sleeve/Marking	Code	
	16	
PVC	C	
PET	T	
Dark blue	B	
Bright red	R	
Sky-blue	S	
Light blue	T	
Pink	Z	
Black	H	
Purple-blue	V	
Red	O	

Lead Forming
Taping Specifications

Fig.1 code: X



Fig.2 code: B



Fig.3 code: B



Fig.4 code: P



Lead Forming

Specification Fig.1 & Fig.2 & Fig.3

Items	Symbol	Case size										Tolerance		
		4*5 4*7		5*5 5*7		5*11		6.3*5	6.3*7 6.3*9	6.3*11 6.3*12	8*5/7 8*9/11 8*11.5 8*12		8*16 8*20	10*9/12 10*12.5 10*13/16 10*20/25
Pin Code		X	B	X	B	X	B	B	B	B	B	B	B	
Lead wire diameter	Φd	0.45		0.45		0.5		0.45	0.5	0.5	0.45/0.5	0.6	0.6	±0.05
Pitch of body	P	12.7		12.7		12.7		12.7	12.7	12.7	12.7	12.7	12.7	±1.0
Feed hole pitch	P0	12.7		12.7		12.7		12.7	12.7	12.7	12.7	12.7	12.7	±0.2
Distance from hole center to lead	P1	5.1	5.6	5.1	5.35	5.1	5.35	5.1	5.1	5.1	4.6	4.6	3.85	±0.7
Distance from feed hole center to body center	P2	6.35		6.35		6.35		6.35	6.35	6.35	6.35	6.35	6.35	±1.0
Lead-to-lead distance	F	2.5	1.5	2.5	2.0	2.5	2.0	2.5	2.5	2.5	3.5	3.5	5.0	±0.5
Height of body from tape center	H	18.5		18.5		18.5		18.5	18.5	18.5	18.5	18.5	18.5	±0.75
Base tape width	W	18.0		18.0		18.0		18.0	18.0	18.0	18.0	18.0	18.0	±0.5
Adhesive tape width	W0	6.0		6.0		6.0		6.0	6.0	8.0	8.0	8.0	11.0	min
Hole position	W1	9.0		9.0		9.0		9.0	9.0	9.0	9.0	9.0	9.0	+0.75 -0.5
Hole down tape position	W2	3.0		3.0		3.0		3.0	3.0	3.0	3.0	3.0	3.0	max

Specification Fig.4

Items	Symbol	Case size									Tolerance
		4*5 4*7	5*5	5*7	5*11	6.3*5	6.3*7 6.3*9	6.3*11 6.3*12	8*5/7 8*9/11 8*11.5/12	8*16 8*20	
Pin Code		P	P	P	P	P	P	P	P	P	
Lead wire diameter	Φd	0.45	0.45	0.45	0.5	0.45	0.5	0.5	0.45/0.5	0.6	±0.05
Pitch of body	P	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	±1.0
Feed hole pitch	P0	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	±0.2
Distance from hole center to lead	P1	3.85	3.85	3.85	3.85	3.85	3.85	3.85	3.85	3.85	±0.7
Distance from feed hole center to body center	P2	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	±1.0
Lead-to-lead distance	F	1.5	2.0	2.0	2.0	2.5	2.5	2.5	3.5	3.5	±0.5
Lead to lead distance	F1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	+0.8 -0.2
Height of body from tape center	H	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	±0.75
Lead wire clinch height	H0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	±0.5
Base tape width	W	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	±0.5
Adhesive tape width	W0	6.0	6.0	6.0	6.0	6.0	6.0	8.0	8.0	8.0	min
Hole position	W1	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	+0.75 -0.5
Hole down tape position	W2	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	max

Lead Forming

Lead Forming & Cut

Code:C
RANGE: $\Phi 4\sim\Phi 18$



Code:F
RANGE: $\Phi 4\sim\Phi 8$



ΦD	F	L	ΦD	F	L
4	1.5	3.0~12.0	4	5.0	3.5, 4.5, 5.0, 7.0
5	2.0	3.0~12.0	5	5.0	3.5, 4.5, 5.0, 7.0
6.3	2.5	3.0~12.0	6.3	5.0	3.5, 4.5, 5.0, 7.0
8	3.5	3.0~12.0	8	5.0	3.5, 4.5, 5.0, 7.0
10	5.0	3.0~12.0	-	-	-
12.5	5.0	3.0~12.0	-	-	-
16	7.5	3.0~12.0	-	-	-
18	7.5	3.0~12.0	-	-	-

Code:J
RANGE: $\Phi 10\sim\Phi 18$



ΦD	F	L
10	5.0	4.0, 4.5, 5.0
12.5	5.0	4.0, 4.5, 5.0
16	7.5	4.0, 4.5, 5.0
18	7.5	4.0, 4.5, 5.0

Solering Recommendation

■ Flow Soldering(Radial Lead Type)



■ Reflow Soldering

- (For Polymer SMD Type)

Recommended Reflow Profile



Item	Preheating	T1(°C)	T2(°C)	T3(°C)	t1(sec.)	t2(sec.)	t3(sec.)	Reflow cycle
Condition 1	150°C to 180°C Within 90sec.	≤260	230	200	≤10	≤40	≤60	1
Condition 2		≤250	230	200	≤10	≤40	≤60	2

● (For Liquid SMD Type)

Case size: $\Phi 6.3$ – $\Phi 10$ mm:

- Temperature at surface of capacitor shall not exceed $T^{\circ}\text{C}$.
- The duration for over 200°C temperature and $T_1^{\circ}\text{C}$ at surface of capacitor shall not exceed t and t_1 seconds, respectively.
- Preheat shall be done at 100°C to 200°C and for Maximum 180 seconds.



Case size (mm)	$T(^{\circ}\text{C})$ ①	$T_1(^{\circ}\text{C})$	$t(\text{sec.})$ ②	$t_1(\text{sec.})$ ③	Reflow cycle
$\Phi 6.3$	250	230	90	40	1
$\Phi 8$	240	230	90	30	1
$\Phi 10$	235	230	60	30	1

- ① Peak temperature
- ② The duration over 200°C (max.)
- ③ The duration over $T_1^{\circ}\text{C}$
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

Case size: $\Phi 12.5$ – $\Phi 18$ mm:

- Temperature at surface of capacitor shall not exceed $T^{\circ}\text{C}$.
- The duration for over 200°C temperature and $T_1^{\circ}\text{C}$ at surface of capacitor shall not exceed t and t_1 seconds, respectively.
- Preheat shall be done at 100°C to 180°C and for Maximum 150 seconds.



Case size (mm)	$T(^{\circ}\text{C})$ ①	$T_1(^{\circ}\text{C})$	$t(\text{sec.})$ ②	$t_1(\text{sec.})$ ③	Reflow cycle
$\Phi 12.5$ – $\Phi 18$	240	230	60	30	1

- ① Peak temperature
- ② The duration over 200°C (max.)
- ③ The duration over $T_1^{\circ}\text{C}$
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

HL series

- Long life, downsized, high ripple current; For power supply applications
- Endurance: +105°C 8,000~12,000 hours
- RoHS Compliant


Upgrade



SPECIFICATIONS


Items	Characteristics								
Category Temperature Range	-25~+105°C								
Rated Voltage Range	160~500 V _{dc}								
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)								
Leakage Current		After 1 minute		After 5 minutes		Where, I: Max. leakage current (μA), C: Nominal capacitance (μF), V: Rated voltage (V) (at 20°C)			
	CV ≤ 1000	I ≤ 0.1CV + 40μA		I ≤ 0.03CV + 15μA					
	CV > 1000	I ≤ 0.04CV + 100μA		I ≤ 0.02CV + 25μA					
Dissipation Factor (tanδ)	Rated Voltage (V _{dc})	160	200	250	350	400	450	500	(at 20°C, 120Hz)
	tanδ (max.)	0.18	0.18	0.18	0.24	0.24	0.24	0.24	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated Voltage (V _{dc})	160	200	250	350	400	450	500	(at 120Hz)
	Z(-25°C)/Z(+20°C)	3	3	3	6	6	6	6	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after DC voltage plus the rated ripple current is applied for a specified period of time at 105°C.								
	Capacitance Change	≤ ±20% of the initial value					Rated Voltage	160 to 400V _{dc}	500V _{dc}
	D.F. (tanδ)	≤ 200% of the initial specified value						Life time	L ≤ 20: 10,000 hours
	Leakage Current	≤ The initial specified value					L > 20: 12,000 hours		Φ ≥ 12.5: 10,000 hours
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.								
	Capacitance Change	≤ ±20% of the initial value							
	D.F. (tanδ)	≤ 200% of the initial specified value							
	Leakage Current	≤ 200% of the initial specified value							

DIMENSIONS [mm]

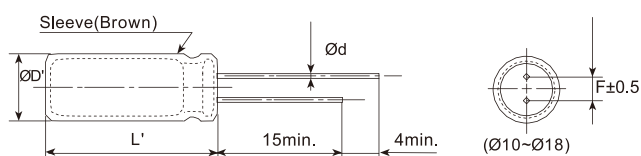

ØD	10	12.5	16	18
Ød	0.6	0.6	0.8	0.8
F	5.0	5.0	7.5	7.5
ØD'	ØD + 0.5max.			
L'	L + 2max.			

PART NUMBERING SYSTEM

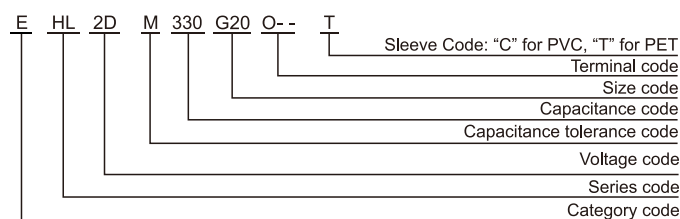

RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Freq.(Hz)	120	1k	10k	100k
Cap.(μF)				
<100	1.0	1.75	2.25	2.50
≥100	1.0	1.67	2.05	2.25

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Radial Type

HL series

■ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)
160(2C)	33	10*16	0.18	210
	47	10*20	0.18	300
	56	10*20	0.18	318
	68	10*25	0.18	345
	82	10*25	0.18	416
		10*30	0.18	448
	100	12.5*20	0.18	575
		10*35	0.18	572
	150	10*40	0.18	668
		10*45	0.18	696
		12.5*25	0.18	767
		10*50	0.18	788
	180	12.5*30	0.18	885
		16*20	0.18	858
		12.5*35	0.18	1044
		16*25	0.18	1022
	220	18*20	0.18	992
		12.5*40	0.18	1196
		12.5*45	0.18	1230
		12.5*50	0.18	1404
	330	16*30	0.18	1355
		18*25	0.18	1292
		16*35	0.18	1505
	390	16*40	0.18	1708
		16*45	0.18	1730
		18*30	0.18	1665
		18*35	0.18	1722
	470	16*50	0.18	1924
18*40		0.18	1910	
18*45		0.18	2135	
680	18*50	0.18	2148	
200(2D)	33	10*20	0.18	255
	39	10*20	0.18	268
	47	10*20	0.18	302
	56	10*25	0.18	346
	68	10*30	0.18	406
	82	12.5*20	0.18	522
	100	10*35	0.18	520
		12.5*25	0.18	628
		10*40	0.18	595
	120	10*45	0.18	624
		12.5*30	0.18	728
		16*20	0.18	698
	150	10*50	0.18	720
		12.5*35	0.18	862
		16*25	0.18	928
	180	18*20	0.18	895
		12.5*40	0.18	1078
		12.5*45	0.18	1116
	220	18*25	0.18	1050
		12.5*50	0.18	1268
		16*30	0.18	1225
		16*35	0.18	1252
	270	16*40	0.18	1428
		18*30	0.18	1402
		16*45	0.18	1575
	390	18*35	0.18	1570
		16*50	0.18	1762
		18*40	0.18	1748
	470	18*45	0.18	1775
		18*50	0.18	1952

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)
250(2E)	27	10*20	0.18	205
	33	10*20	0.18	242
	47	10*25	0.18	316
		10*30	0.18	342
	56	12.5*20	0.18	430
	68	10*35	0.18	432
	82	10*40	0.18	495
		10*45	0.18	518
		12.5*25	0.18	565
		12.5*30	0.18	575
	100	10*50	0.18	586
		12.5*30	0.18	662
		16*20	0.18	638
		12.5*35	0.18	770
	120	16*25	0.18	758
		18*20	0.18	732
		12.5*40	0.18	892
	150	12.5*45	0.18	922
		12.5*50	0.18	1040
		16*30	0.18	995
	180	18*25	0.18	955
		16*35	0.18	1130
		18*30	0.18	1138
	220	16*40	0.18	1290
		16*45	0.18	1315
		18*35	0.18	1300
		16*50	0.18	1480
	330	18*40	0.18	1466
18*45		0.18	1488	
18*50		0.18	1630	
390	18*50	0.18	1630	
350(2V)	15	10*16	0.24	150
	18	10*20	0.24	165
	22	10*20	0.24	200
	27	10*25	0.24	242
		10*30	0.24	256
	33	12.5*20	0.24	332
	39	10*35	0.24	326
	47	10*40	0.24	376
		12.5*25	0.24	425
		10*45	0.24	426
	56	12.5*30	0.24	498
		16*20	0.24	476
		10*50	0.24	486
	68	12.5*35	0.24	583
		18*20	0.24	550
		12.5*40	0.24	658
	82	16*25	0.24	628
		12.5*45	0.24	752
		12.5*50	0.24	772
	100	16*30	0.24	744
		18*25	0.24	710
		16*35	0.24	832
		16*40	0.24	964
	150	16*45	0.24	978
		18*30	0.24	944
		16*50	0.24	1095
	180	18*35	0.24	1065
		18*40	0.24	1086
18*45		0.24	1215	
220	18*50	0.24	1222	

HL series

■ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)
400(2G)	12	10*16	0.24	135
	15	10*20	0.24	155
	18	10*20	0.24	180
	22	10*25	0.24	216
	27	10*30	0.24	256
		12.5*20	0.24	300
	33	10*35	0.24	300
		10*40	0.24	342
	39	10*45	0.24	358
		12.5*25	0.24	390
	47	12.5*30	0.24	456
		16*20	0.24	438
	56	10*50	0.24	440
		12.5*35	0.24	528
		18*20	0.24	502
	68	12.5*40	0.24	600
		16*25	0.24	572
	82	12.5*45	0.24	684
		12.5*50	0.24	700
		16*30	0.24	672
		18*25	0.24	644
	100	16*35	0.24	760
		16*40	0.24	864
	120	16*45	0.24	880
		18*30	0.24	842
		18*35	0.24	875
150	16*50	0.24	1000	
	18*40	0.24	985	
180	18*45	0.24	1098	
	220	18*50	0.24	1225

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)
450(2W)	10	10*16	0.24	120
	12	10*20	0.24	150
	15	10*25	0.24	186
	18	10*30	0.24	216
		12.5*20	0.24	256
	22	10*35	0.24	252
		10*40	0.24	292
	27	10*45	0.24	306
		12.5*25	0.24	342
	33	12.5*30	0.24	400
		16*20	0.24	386
	39	10*50	0.24	378
		12.5*35	0.24	462
		18*20	0.24	440
	47	12.5*40	0.24	528
		16*25	0.24	500
	56	12.5*45	0.24	592
		16*30	0.24	588
		18*25	0.24	562
		12.5*50	0.24	672
	68	16*35	0.24	664
		16*40	0.24	750
	82	16*45	0.24	762
		18*30	0.24	734
	100	16*50	0.24	858
		18*35	0.24	836
120	18*40	0.24	935	
	18*45	0.24	948	
150	18*50	0.24	1065	
500(2H)	6.8	10*20	0.24	90
	10	10*30	0.24	130
		12.5*20	0.24	125
	12	12.5*20	0.24	135
		10*35	0.24	170
	15	12.5*25	0.24	170
		16*20	0.24	165
	18	10*45	0.24	190
		12.5*30	0.24	190
	22	10*50	0.24	230
		12.5*35	0.24	225
	33	16*20	0.24	220
		18*25	0.24	285
	47	18*30	0.24	400

Radial Type

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Aihua](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#)
[VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)