

MK series


- Endurance: +105°C 2,000 ~ 3,000 hours
- Designed for surface mounting on high density PC board
- RoHS Compliant



SPECIFICATIONS


Items	Characteristics												
Category Temperature Range	-40~+105°C(8.3~450V _{dc})												
Rated Voltage Range	6.3~450V _{dc}												
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)												
Leakage Current	6.3~100V _{dc}						160~450V _{dc}						(at 20°C)
	I ≤ 0.01CV or 3μA, whichever is greater. (2 minutes)						I ≤ 0.04CV + 100μA (1 minute)						
Where, I: Max. leakage current (μA), C: Nominal capacitance (μF), V: Rated voltage (V)													(at 20°C)
Dissipation Factor (tanδ)	Rated Voltage(V _{dc})	6.3	10	16	25	35	50	63	80	100	160~250	400~450	(at 20°C, 120Hz)
	tanδ (max.)	D80~E80	0.30	0.24	0.20	0.16	0.14	0.12	0.12	0.12	0.12	-	
													(at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated Voltage(V _{dc})	6.3	10	16	25	35	50	63	80	100	160~250	400~450	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	2	2	6	6	
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3	3	3	3	10	18	
Endurance	The specifications listed below shall be met when the capacitors are restored to 20°C after rated voltage is applied for a specified period of time at 105°C.												
	Load Life	2,000 hours(160~450V _{dc} : 3,000 hours)											
	Capacitance Change	≤±20% of the initial value											
	Dissipation Factor (tanδ)	≤200% of the initial specified value											
	Leakage Current	≤The initial specified value											
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after leaving them under no load at 105°C for 1,000 hours (6.3~100V _{dc} : 500 hours).												
	Capacitance Change	≤±20% of the initial value											
	Dissipation Factor (tanδ)	≤200% of the initial specified value											
	Leakage Current	≤200% of the initial specified value											

DIMENSIONS[mm]

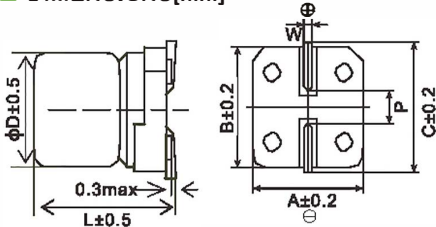

Size code	D	L	A	B	C	W	P
D80	5	7.7	5.3	5.3	5.9	0.5~0.8	1.4
E80	8.3	7.7	8.6	8.8	7.2	0.5~0.8	1.9
E80	8.3	10.5	8.8	8.6	7.2	0.5~0.8	1.9
F80	8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
F80	8	12.5	8.3	8.3	9.0	0.7~1.1	3.1
F80	8	13.5	8.3	8.3	9.0	0.7~1.1	3.1
F80	8	15.5	8.3	8.3	9.0	0.7~1.1	3.1
G80	10	10.5	10.3	10.3	11.0	0.7~1.1	4.5
G80	10	12.5	10.3	10.3	11.0	0.7~1.1	4.5
G80	10	13.5	10.3	10.3	11.0	0.7~1.1	4.5
G80	10	16.5	10.3	10.3	11.0	0.7~1.1	4.5
H80	12.5	13.5	13.0	13.0	13.7	1.0~1.3	4.5
H80	12.5	16.0	13.0	13.0	13.7	1.0~1.3	4.5
H80	12.5	21.0	13.0	13.0	13.7	1.0~1.3	4.5
I80	16	16.5	17.0	17.0	18.0	1.0~1.3	6.5
I80	16	21.5	17.0	17.0	18.0	1.0~1.3	6.5
J80	18	18.5	19.0	19.0	20.0	1.0~1.3	8.5
J80	18	21.5	19.0	19.0	20.0	1.0~1.3	8.5

PART NUMBERING SYSTEM

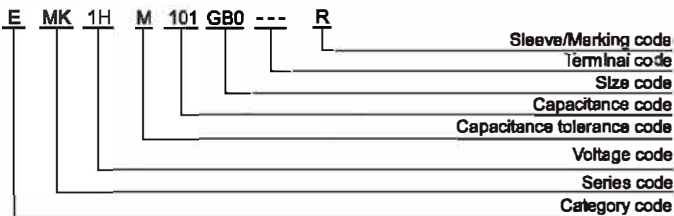

RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Rated voltage(V _{dc}) \ Freq.(Hz)	120	1k	10k	100k
6.3~450	0.50	0.80	0.90	1.00

Surface Mount Type

MK series

■ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 100kHz)
6.3(0J)	100	D80	0.30	105
	220	E80	0.30	160
	330	FB0	0.40	340
	1000	GB0	0.40	860
10(1A)	33	D80	0.24	105
	100	E80	0.24	175
	220	E80	0.24	180
	330	FB0	0.30	340
	470	FB0	0.30	360
16(1C)	820	GB0	0.30	860
	47	D80	0.20	105
	100	E80	0.20	175
	150	E80	0.20	190
	220	FB0	0.26	500
25(1E)	330	FB0	0.26	545
	470	GB0	0.26	800
	33	D80	0.16	105
	47	E80	0.16	180
	100	E80	0.16	205
35(1V)	220	FB0	0.16	550
	330	GB0	0.16	780
	470	GD0	0.16	875
	10	D80	0.14	105
	22	D80	0.14	110
50(1H)	47	E80	0.14	210
	100	FB0	0.14	575
	220	GB0	0.14	835
	330	GD0	0.14	900
	10	D80	0.12	90
63(1J)	22	E80	0.12	175
	33	E80	0.12	180
	47	FB0	0.12	540
	100	GB0	0.12	700
	220	WE0	0.12	900
80(1B)	330	WG5	0.12	1180
	10	D80	0.12	85
	22	E80	0.12	150
	33	FB0	0.12	375
	47	FB0	0.12	450
100(1K)	100	GB0	0.12	575
	220	WE0	0.12	890
	10	E80	0.12	140
	22	FB0	0.12	375
	33	FB0	0.12	450
160(2C)	47	GB0	0.12	575
	100	GD0	0.12	600
	150	WE0	0.12	800
	220	WG5	0.12	960
	4.7	D80	0.12	70
200(2D)	10	E80	0.12	135
	22	FB0	0.12	345
	33	GB0	0.12	560
	47	GB0	0.12	575
	100	WE0	0.12	680

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 100kHz)
160(2C)	10	GB0	0.15	90
	15	GB0	0.15	136
	22	GE0	0.15	180
	33	WE0	0.15	200
		GH0	0.15	240
	47	WE0	0.15	310
		WG5	0.15	420
	68	LH0	0.15	520
		LN0	0.15	660
		MH0	0.15	660
100	LN0	0.15	780	
	MN0	0.15	780	
200(2D)	10	GB0	0.15	120
	15	GB0	0.15	164
	22	GE0	0.15	200
		WG5	0.15	236
	33	GH0	0.15	260
		WG5	0.15	300
	47	WM5	0.15	440
		LN0	0.15	556
250(2E)	68	LN0	0.15	680
	2.2	EB0	0.15	56
	3.3	EB0	0.15	68
	4.7	FB0	0.15	96
		GB0	0.15	104
	10	WE0	0.15	184
	22	LH0	0.15	364
	33	LN0	0.15	470
MH0		0.15	470	
47	MN0	0.15	580	
400(2G)	1	E80	0.20	28
	1.5	EB0	0.20	36
		EB0	0.20	44
	2.2	FB0	0.20	52
		FB0	0.20	64
	3.3	GB0	0.20	72
		FE0	0.20	72
		GB0	0.20	76
	3.9	FB0	0.20	78
		FD0	0.20	80
		GB0	0.20	84
		FD0	0.20	96
	5.6	FD0	0.20	96
	6.8	FE0	0.20	108
	8.2	FG0	0.20	130
	10	GH0	0.20	156
		LH0	0.20	176
		WG5	0.20	184
15	LH0	0.20	210	
	LN0	0.20	260	
	MN0	0.20	280	
450(2W)	2.2	GB0	0.20	50
	3.3	WE0	0.20	80
	4.7	WE0	0.20	96
	10	LH0	0.20	170
	15	LN0	0.20	200
	22	LN0	0.20	240

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Aihua manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AHC0609220M050R](#)
[AHC0609680M035R](#) [AEA1616471M063R](#) [AEA0810330M080R](#) [AEA1616152M025R](#) [AHA1012561M016R](#) [AHC0812470M080R](#)
[AHA0810560M040R](#) [AHC0609101M025R](#) [AEA1616151M100R](#) [AEA0810221M025R](#) [AEH1010331M025R](#) [AEA1616331M063R](#)
[AHC0609470M035R](#) [AHC1012471M025R](#) [AEA1213101M080R](#) [AEA1010221M050R](#) [AHC1012221M035R](#) [AEH1213471M025R](#)
[AEA1010221M035R](#) [AHC0811221M025R](#) [AEA1010681M010R](#) [AEA1010470M080R](#) [AHC0609150M063R](#) [AEA0810101M050R](#)
[AEH10104R7M250R](#) [AEH1216331M050R](#) [AEA1616222M025R](#) [AEH1010470M080R](#) [AEA0810560M050R](#) [AEA1213680M100R](#)
[AEH0810101M035R](#)