

WH Series


- Standard series for general purpose
- Wide temperature range from -40°C~+105°C
- Endurance: +105°C 2,000hours
- RoHS Compliant**



◆ SPECIFICATIONS


Items	Characteristics																																																										
Category Temperature Range	-40 to +105°C(6.3 to 100Vdc) -25 to +105°C(160 to 450Vdc)																																																										
Rated Voltage Range	6.3 to 450Vdc																																																										
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)																																																										
Leakage Current	<table border="1"> <tr> <td>6.3 to 100Vdc</td> <td colspan="3">160 to 450Vdc</td> <td colspan="8" style="text-align: right;">Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C)</td></tr> <tr> <td>I $\leq 0.03CV$ or 4μA (at 1 minute)</td><td>CV</td><td>After 1 minutes</td><td>After 5 minutes</td><td colspan="8"></td></tr> <tr> <td>I $\leq 0.01CV$ or 3μA (at 2 minute)</td><td>CV $\leq 1,000$</td><td>I $\leq 0.1CV + 40\mu$A</td><td>I $\leq 0.03CV + 15\mu$A</td><td colspan="8"></td></tr> <tr> <td>Whichever is greater</td><td>CV $> 1,000$</td><td>I $\leq 0.04CV + 100\mu$A</td><td>I $\leq 0.02CV + 25\mu$A</td><td colspan="8"></td></tr> </table>								6.3 to 100Vdc	160 to 450Vdc			Where, I : Max. leakage current (μ A), C : Nominal capacitance (μ F), V : Rated voltage (V) (at 20°C)								I $\leq 0.03CV$ or 4 μ A (at 1 minute)	CV	After 1 minutes	After 5 minutes									I $\leq 0.01CV$ or 3 μ A (at 2 minute)	CV $\leq 1,000$	I $\leq 0.1CV + 40\mu$ A	I $\leq 0.03CV + 15\mu$ A									Whichever is greater	CV $> 1,000$	I $\leq 0.04CV + 100\mu$ A	I $\leq 0.02CV + 25\mu$ A									(at 20°C)		
6.3 to 100Vdc	160 to 450Vdc			Where, I : Max. leakage current (μ A), C : Nominal capacitance (μ F), V : Rated voltage (V) (at 20°C)																																																							
I $\leq 0.03CV$ or 4 μ A (at 1 minute)	CV	After 1 minutes	After 5 minutes																																																								
I $\leq 0.01CV$ or 3 μ A (at 2 minute)	CV $\leq 1,000$	I $\leq 0.1CV + 40\mu$ A	I $\leq 0.03CV + 15\mu$ A																																																								
Whichever is greater	CV $> 1,000$	I $\leq 0.04CV + 100\mu$ A	I $\leq 0.02CV + 25\mu$ A																																																								
Dissipation Factor (tan δ)	Rated voltage (Vdc)	6.3	10	16	25	35	50	63	100	160~250	350~400	450																																															
	tan δ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.20	0.24	0.24																																															
	When nominal capacitance exceeds 1,000 μ F, add 0.02 to the value above for each 1,000 μ F increase. (at 20°C, 120Hz)																																																										
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (Vdc)	6.3	10	16	25	35	50	63	100	160~250	350~400	450																																															
	Z(-25°C)/Z(+20°C)	5	4	3				2		3	6	6																																															
	Z(-40°C)/Z(+20°C)	12	10	8	5	4		3	-	-	-	-																																															
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.																																																										
	Capacitance change	$\leq \pm 20\%$ of the initial value																																																									
	D.F. (tan δ)	$\leq 200\%$ of the initial specified value																																																									
	Leakage current	\leq The initial specified value																																																									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.																																																										
	Capacitance change	$\leq \pm 20\%$ of the initial value																																																									
	D.F. (tan δ)	$\leq 200\%$ of the initial specified value																																																									
	Leakage current	$\leq 200\%$ of the initial specified value																																																									

◆ DIMENSIONS [mm]

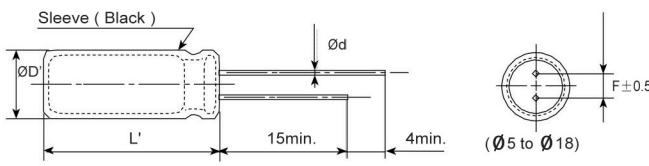

ØD	5	6.3	8	10	12.5	16	18
Ød	0.5	0.5	0.5	0.6	0.6	0.6	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ØD'	$\varnothing D + 0.5$ max.						
L'	L + 2max.						

◆ PART NUMBER SYSTEM

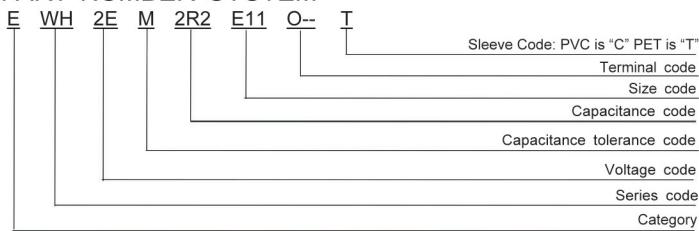

※Sleeve Code and Terminal Code should follow the part number system

◆ RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Freq.(Hz) Cap.(μ F)	50	120	300	1k	10k	100k
Cap.<10	0.65	1.00	1.35	1.75	2.30	2.50
10≤Cap.<100	0.75	1.00	1.25	1.50	1.75	1.80
100≤Cap.≤1000	0.80	1.00	1.15	1.30	1.40	1.50
Cap.>1000	0.85	1.00	1.03	1.05	1.08	1.08

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Aihua manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)