

## NC PASTE FLUX


### FEATURES

- Halogen/Halide-Free
- Low Voiding
- Wide Process Window
- Tin-Lead and Lead-Free Compatible
- Suitable for BGA Rework and Ball Sphere Attach
- Complies with IPC 7711-7721 Standard

### DESCRIPTION

NC Paste Flux is a no clean tacky/rework flux designed for general touch up or rework of printed circuit boards, and for BGA rework and sphere attachment. NC Paste Flux can be used for hand soldering, hot-air rework stations, convection reflow, or vapor phase soldering. Soldering residues do not require cleaning and are clear and inert. NC Paste Flux is compatible with all tin-lead and lead-free alloys. NC Paste Flux can be dispensed, brushed or stencil printed. NC Paste Flux complies with the IPC 7711-7721 standard.

### CHARACTERISTICS

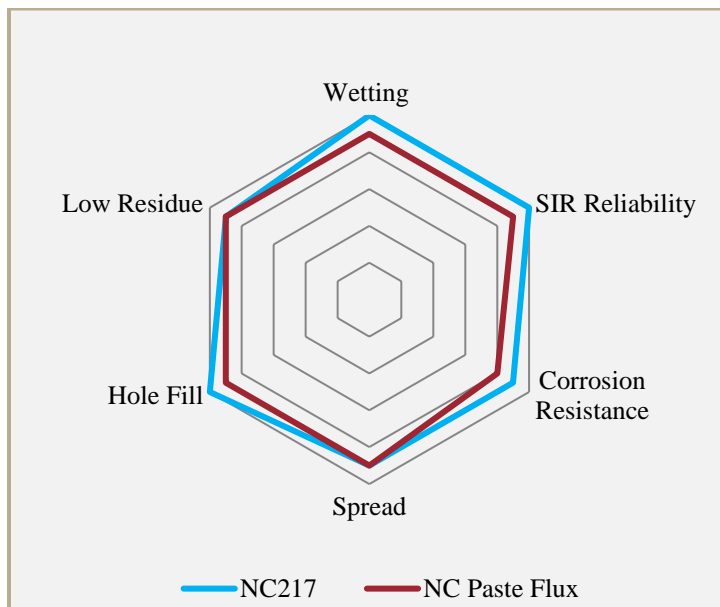

### HANDLING & STORAGE

Parameter	Time	Temperature
Sealed Refrigerated Shelf Life	1 Year	0°C-12°C (32°F-55°F)
Sealed Unrefrigerated Shelf Life	6 Months	< 25°C (< 77°F)

NC Paste Flux has a sealed shelf life of one (1) year when stored 0°C-12°C (32°F-55°F). Do not store near fire or flame. Keep away from sunlight as it may degrade product. NC Paste Flux is shipped ready-to-use, no mixing necessary. Do not mix used and unused chemicals in the same container. Reseal any opened containers. After opening, paste flux shelf life is environment and application dependent.

### APPLICATION

NC Paste Flux is ready to use directly from its container, no thinning required. NC Paste flux is typically dispensed, swabbed or brushed onto the workpiece.

### PROCESS GUIDELINES

NC paste flux should be processed according to the alloy and application requirements. For application support, please contact AIM by visiting <http://www.aimsolder.com/technical-support-contacts>.

# TECHNICAL DATA SHEET

## CLEANING

NC Paste Flux can be cleaned using commercially available flux removers. Contact AIM for additional information.


## SAFETY

Use with adequate ventilation and proper personal protective equipment. Refer to the accompanying Safety Data Sheet for any specific emergency information. Do not dispose of any hazardous materials in non-approved containers.

## TEST DATA SUMMARY

Name	Test Method	Results	
IPC Flux Classification	J-STD-004	ROLO	
IPC Flux Classification	J-STD-004B 3.3.1	ROLO	
Name	Test Method	Results	Image
Copper Mirror	J-STD-004B 3.4.1.1 IPC-TM-650 2.3.32	LOW	
Corrosion	J-STD-004B 3.4.1.2 IPC-TM-650 2.6.15	PASS	
Quantitative Halides	J-STD-004B 3.4.1.3 IPC-TM-650 2.3.28.1	0.0%	
Qualitative Halides, Silver Chromate	J-STD-004B 3.5.1.1 IPC-TM-650 2.3.33	PASS	
Qualitative Halides, Fluoride Spot	J-STD-004B 3.5.1.2 IPC-TM-650 2.3.35.1	No Fluoride	

# TECHNICAL DATA SHEET

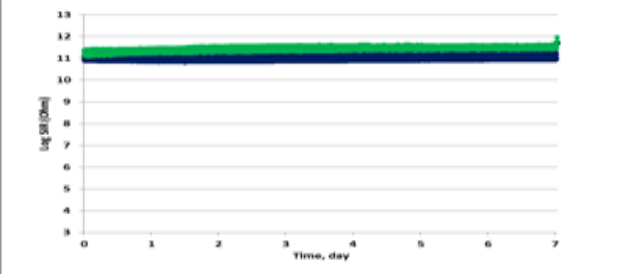Name	Test Method	Results	Image
Surface Insulation Resistance	J-STD-004B 3.4.1.4 IPC-TM-650 2.6.3.7	All measurements on test patterns exceed 100 MΩ	
Acid Value Determination	J-STD-004B 3.4.2.2 IPC-TM-650 2.3.13	161 ± 3 mgKOH/g flux Typical	
Visual	J-STD-004B 3.4.2.5	PASS	
Wetting	J-STD-005A 3.9 IPC-TM-650 2.4.45	PASS	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Soldering Flux](#) category:*

*Click to view products by [AIM manufacturer](#):*

Other Similar products are found below :

[8351-1L](#) [8351-125ML](#) [8342-50G](#) [ART.AGT-088](#) [270WR](#) [ART.AGT-089](#) [ART.AGT-094](#) [ART.AGT-179](#) [CW8100](#) [CW8400](#) [SSS500ML](#)  
[63-0000-0186](#) [63-0000-0951](#) [63-0000-0977](#) [63-0000-1544](#) [83-1000-0186](#) [83-1000-0951](#) [83-1097-2331](#) [8341-10ML](#) [835-100ML](#) [SF-01](#) [SF-](#)  
[02](#) [CW8700](#) [FL22W](#) [SMD291SNL50T3](#) [SMD291AX50T3](#) [CQ2LF](#) [CQ4LF](#) [CQ4LF-0.5](#) [CQ4LF-1.0](#) [SMD291](#) [SMD291150G](#) [SMD29175G](#)  
[SMD291AX](#) [SMD291AX10](#) [SMD291AX250T3](#) [SMD291NL](#) [SMD291ST2CC6](#) [SMD291ST8CC](#) [SMD4300TF](#) [CW8100](#) [CW8200](#) [CW8500](#)  
[FL33B](#) [837-P](#) [2506-N](#) [2507-N](#)