

## Series AM1PS-JZ

### 1 Watt | DC-DC Converter

#### FEATURES:

- Unregulated
- 8 Pin DIP Package
- Low ripple and noise
- High efficiency up to 82%
- Operating temperature -40°C to + 105°C
- Input / Output isolation 3000 VDC
- Pin compatible with multiple manufacturers
- Continuous Short Circuit Protection

Picture Coming Soon



#### Models

#### Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Max. Capacitive Load (μF)	Efficiency typ. (%)
AM1PS-0503SH30JZ	4.5-5.5	3.3	303	3000	2400	74
AM1PS-0505SH30JZ	4.5-5.5	5	200	3000	2400	82
AM1PS-0509SH30JZ	4.5-5.5	9	111	3000	1000	83
AM1PS-0512SH30JZ	4.5-5.5	12	84	3000	560	83
AM1PS-0515SH30JZ	4.5-5.5	15	67	3000	560	83
AM1PS-0524SH30JZ	4.5-5.5	24	42	3000	220	85

#### Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5	4.5-5.5		VDC
Input current (Full load/No load)	3.3VDC, 5VDC 9VDC, 12VDC 15VDC, 24VDC	270/5 241/12 241/18	286/10 254/20 254/30	mA
Absolute Maximum Ratings(1sec. max)	5V input		-0.7~9	VDC
Filter			Capacitor	
Reflected ripple current		15		mA

#### Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec, <1mA		3000	VDC
Resistance		> 1000		MOhm
Capacitance		20		pF

#### Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	See typical characteristics	±5		%
Short Circuit protection		Continuous, auto recovery		
Line voltage regulation	Input voltage change: ±1%	3.3VDC output Other models	1.5 1.2	% of Vin
Load voltage regulation	Load 10 – 100%	3.3VDC output 5VDC output 9VDC output 12VDC output 15VDC output 24VDC output	15 10 8 7 6 5	20 15 10 10 10 10
Temperature coefficient		±0.02		%/°C
Ripple & Noise	At 20 MHz Bandwidth	24VDC output Other models	50 30	100 75
				mV p-p

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	270		KHz
Operating temperature	With derating (see graph below)	-40 to +105		°C
Storage temperature		-55 to +125		°C
Maximum case temperature			130	°C
Cooling	Free air convection			
Humidity	Non condensing		95	%
Case material	Plastic UL94-V0			
Lead Soldering Temperature	1.5mm from Lead, 10 sec max.		300	°C
Weight		1.8		g
Dimensions (L x W x H)		0.50 x 0.40 x 0.32 inches	12.70 x 10.16 x 8.20 mm	
MTBF	>3500K hrs(MIL-HDBK -217F, Ground Benign, t <sub>a</sub> =+25°C)			

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


### Safety Specifications

Parameters	
Standards	Designed to meet IEC/EN/UL 62368 EMI - Conducted and radiated emission CISPR32 / EN55032, class B (with the recommended EMC circuit) Electrostatic Discharge Immunity IEC 61000-4-2, Air ±8KV, Contact ±4KV, Criteria B



### Pin Out Specifications

Pin	Single
1	- V Input
4	+V Input
5	+V Output
7	-V Output



### Derating

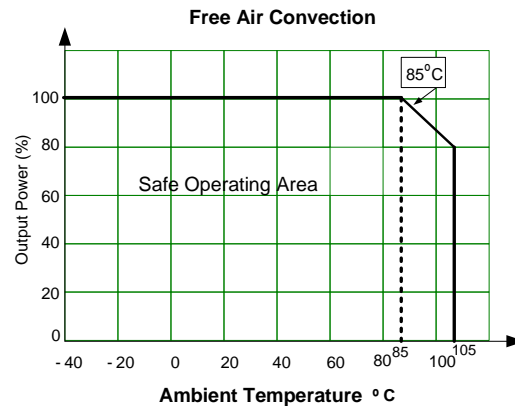

### Dimensions & PCB Foot Print

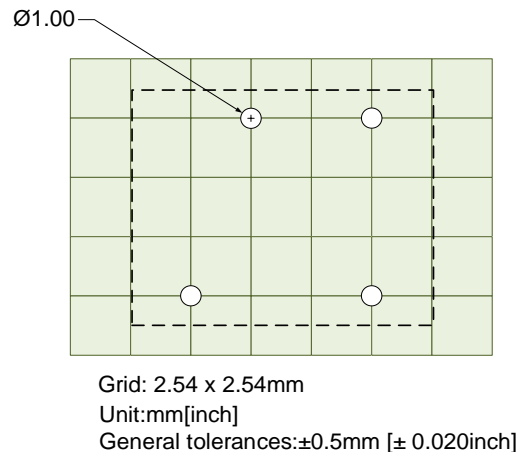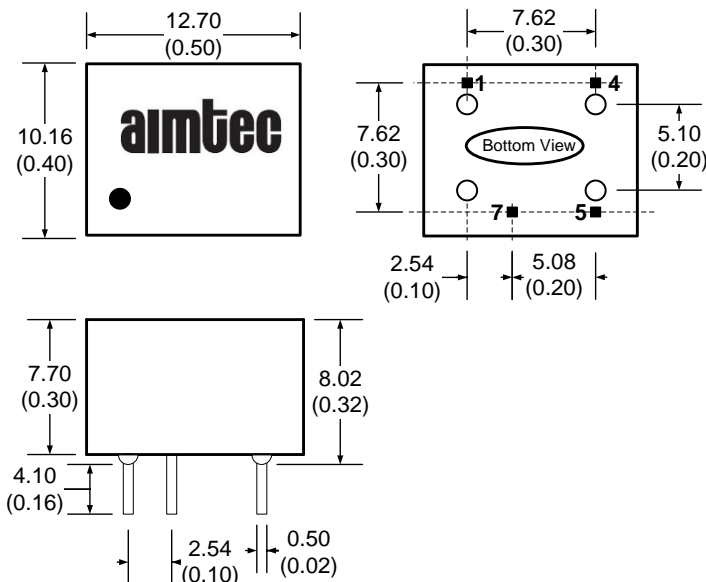


### Typical Characteristics

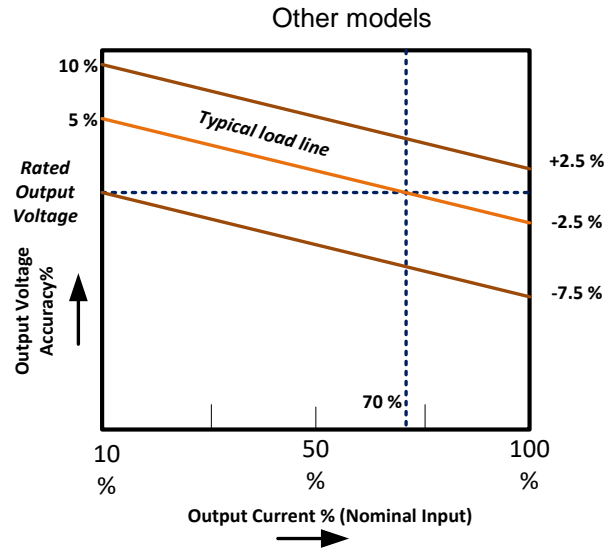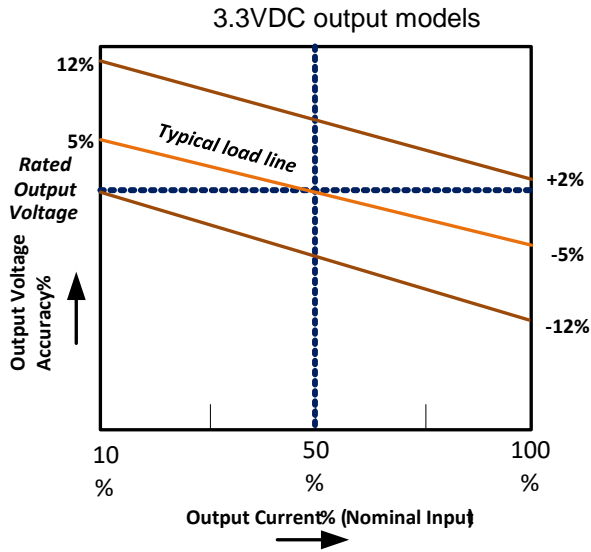


### Typical Application Circuit

Single Output

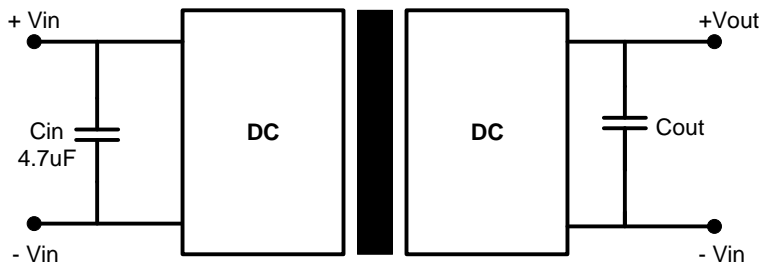

Model	Cout	CY
3.3V output	10uF	-
5V output	10uF	-
9V output	2.2uF	-
12V output	2.2uF	1nF/4KVDC
15V output	1uF	1nF/4KVDC
24V output	1uF	1nF/4KVDC

### Recommended Circuit for EMI Class B

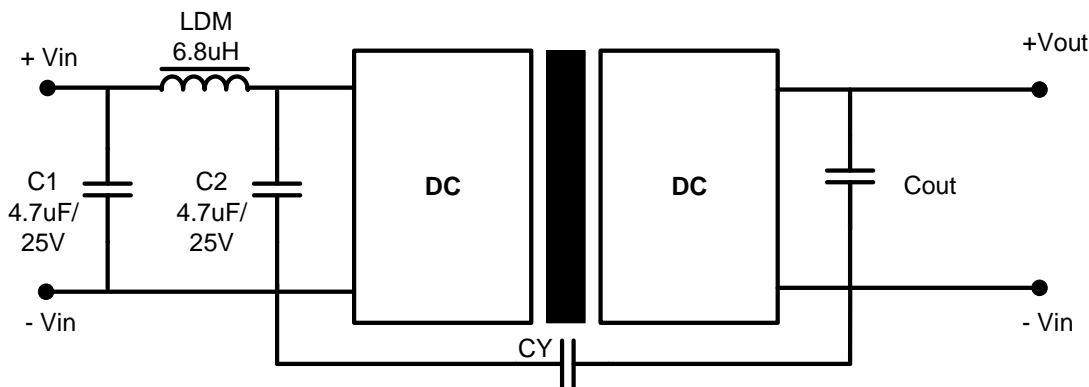

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Aimtec](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [TME 0303S](#) [TME 0505S](#) [TME 1205S](#) [TME 1212S](#) [TME 2405S](#) [TME 2412S](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [TME 0509S](#)