

Click to  
**ORDER**  
samples

## AMED120-NZ



DIN Rail

The new AMED120-NZ is a brand-new AC/DC converter that offers much greater cost effectiveness due to material normalization and production automation also leading to improved reliability and performance. Offering a commercial input voltage range of 85-264VAC and an output voltage range from 5-48V, this series will offer many benefits to your new system design.


This new series offers great operating temperatures, from -20°C to 60°C also features an isolation of 4000VAC for improved reliability and system safety. Furthermore, a higher MTBF of 300,000h, output short circuit protection (OSCP), output over-current protection (OCP) and an output over-voltage protection (OVP) come standard with the series.

The AMED120-NZ is perfect for street lighting controls, grid power, LED, instrumentation, industrial controls, communication and civil applications.

## Features

- Universal Input: 90 - 264VAC/127 - 373VDC
- Operating Temp: -20 °C to +60 °C
- High isolation voltage: 4000VAC
- Low ripple & noise, 150mV(p-p), max.
- Output short circuit, over-current, over-voltage, over-temperature protection

## Summary

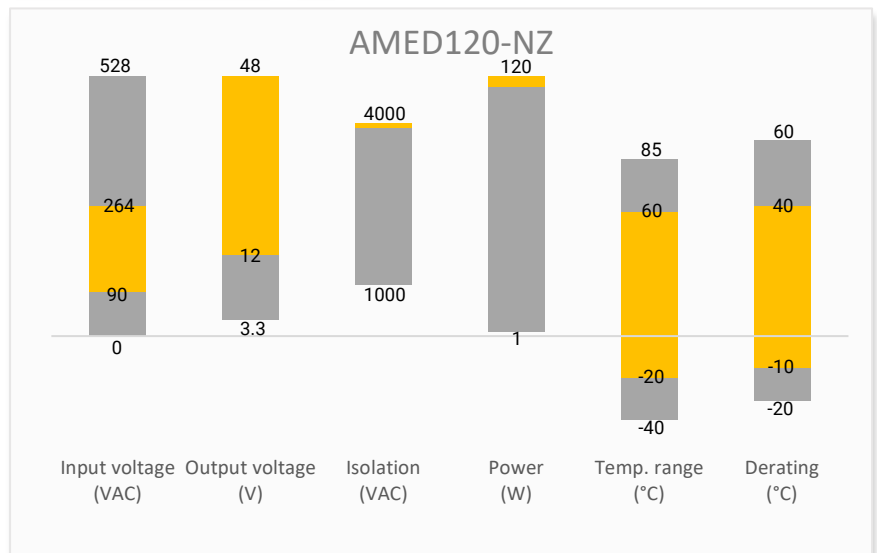

## Training



Product Training Video  
(click to open)



Press Release

Coming Soon!

Application Notes

## Applications



Power Grid



Industrial



Telecom



Instrumentation

## Models & Specifications

Single Output							
Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (A)	Maximum capacitive load ( $\mu$ F)	Efficiency @ 230VAC Typ. (%)
AMED120-12SNZ	90~264/47~63	127~373	120	12	10	3000	85
AMED120-24SNZ	90~264/47~63	127~373	120	24	5	1200	88
AMED120-48SNZ	90~264/47~63	127~373	120	48	2.5	800	89

Input Specifications				
Parameters	Conditions	Typical	Maximum	Units
Input Current	115VAC		2700	mA
	230VAC		1600	
Inrush Current	115VAC	20		A
	230VAC	40		

Output Specifications				
Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	0 - 100% load	12 VDC Output	$\pm 2$	%
		24,48 VDC Output	$\pm 1$	%
Line regulation	Rated load	$\pm 0.5$		%
Load regulation	0 - 100% load	$\pm 1$		%
Ripple & Noise	20MHz bandwidth	12 VDC Output		100
		24 VDC Output		120
		48 VDC Output		150
Hold up time	115VAC	8		ms
	230VAC	16		ms
Voltage adjustable range	12 VDC Output	12 - 14		V
	24 VDC Output	24 - 28		
	48 VDC Output	48 - 55		



\* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application not for specific details. Measured with 47 $\mu$ F electrolytic capacitor and 0.1 $\mu$ F ceramic capacitor.

Isolation Specifications				
Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, Leakage current < 10mA	4000		VAC
Tested Input to GND voltage		2000		
Tested Output to GND voltage		500		
Insulation resistance	500VDC	>100		M $\Omega$




General Specifications						
Parameters	Conditions		Typical	Maximum	Units	
Over Current protection	Self- recovery		105 - 150		% of I <sub>out</sub>	
Over voltage protection	12 VDC Output, manual-recovery		≤ 16		VDC	
	24 VDC Output, manual-recovery		≤ 33			
	48 VDC Output, manual-recovery		≤ 60			
Over temperature protection	Output voltage turn off, manual-recovery					
Short circuit protection	Hiccup, Continuous, Self-recovery (Recovery time < 5S)					
Switching Frequency			65		KHz	
Operating temperature			-20 to +60		°C	
Storage temperature			-40 to +85		°C	
Power derating	115VAC	-20 °C to -10°C	2.0		% / °C	
	230VAC	-20 °C to -10°C	0		% / °C	
	115VAC	40 °C to 60°C	2.5			
	12 VDC Output	230 VAC	45 °C to 60°C	3.33		
	24,48 VDC Output	VAC	50 °C to 60°C	5		
	90 to 100 VAC		1.0		% / VAC	
Temperature coefficient			± 0.03		% / °C	
Protection Class	Class I					
Cooling	Free air convection					
Storage Humidity				95	% RH	
Operating Humidity				90	% RH	
Case material	Metal (AL1050, SGCC) and Plastic( PC940)					
Weight			500		g	
Dimensions (L x W x H)	1.38 x 5.04 x 4.72 inches (35.00 x 128.00 x 120.00 mm)					
MTBF	> 300 000 hrs (MIL-HDBK -217F, t <sub>a</sub> =+25°C)					
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.						

Safety Specifications		
Parameters		
Standards	Designed to meet IEC/EN/UL 62368, EN 60335, GB4943	
	EMC - Conducted and radiated emission	CISPR32 / EN55032, Class A
	Voltage flicker	IEC/EN 61000-3-3
	Electrostatic Discharge Immunity	IEC 61000-4-2 Contact ±6KV, Air ±8KV, Criteria B
	RF, Electromagnetic Field Immunity	IEC 61000-4-3 10V/m, Criteria A
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4 ±4KV, Criteria B
	Surge Immunity	IEC 61000-4-5 L-L ±2KV, L-G ±4KV, Criteria B
	CS, Conducted Disturbance Immunity	IEC 61000-4-6 10V r.m.s, Criteria A
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11 0%, 70%, Criteria B

## Derating

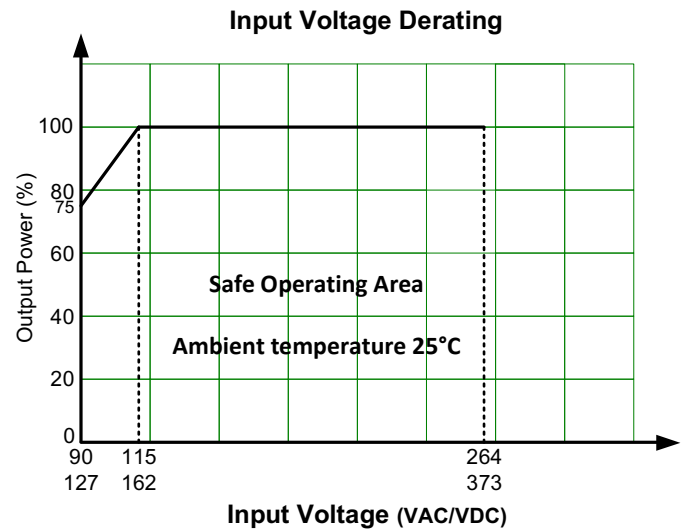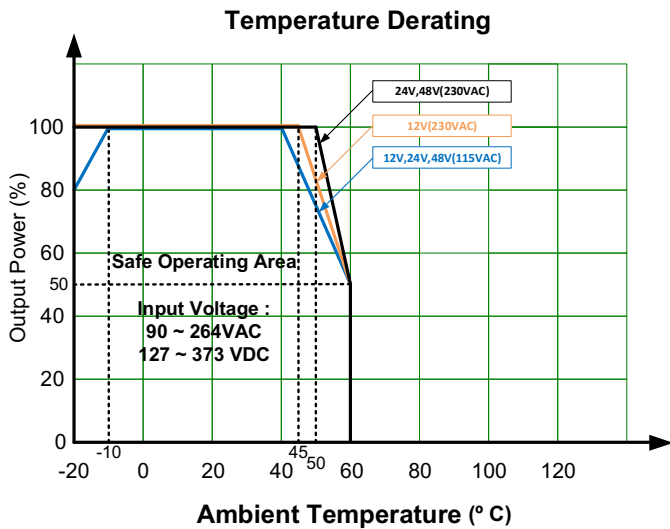

## Dimensions

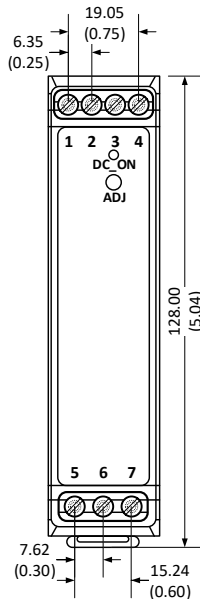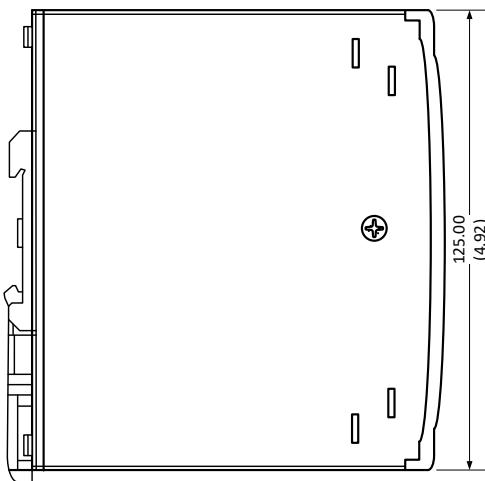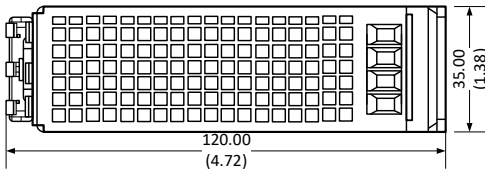

Pin Output Specifications

Pin	Function
1	+V Output
2	+V Output
3	-V Output
4	-V Output
5	GND
6	Input (L)
7	Input (N)
ADJ	Voltage adjustment

**Note:**

Unit: mm (inch)

General tolerance :  $\pm 1.0$  (0.04)

Wire gauge : 26 - 10AWG

Tightening torque : 0.4N·m Max.

Mounting rail : TS35, rail need to connect safety ground

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Power Supplies](#) category:*

*Click to view products by [Aimtec](#) manufacturer:*

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#) [DVP08ST11N](#)  
[DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB034-12-1PM-C](#) [SS14011524](#) [PS-UPS40](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [PSD-A60W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#) [ZI-20](#) [PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#) [PS-S10024](#)  
[PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#) [PSC-48148](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#) [PSA-6024](#)