

Typical performance/典型性能

- ◆ 特点: 定电压输入, 隔离非稳压输出, 1W 功率
 Characteristics: Fixed Input, isolation, Unregulated Output, 1W
- ◆ 隔离电压 Isolation voltage: 1000VDC
- ◆ 效率 Efficiency : 高达(up to) 80%
- ◆ 工作环境温度 Working temperature : -40℃~+85℃
- ◆ MTBF ≥ 350 万小时(3500000Hrs)
- ◆ 符合 RoHS 指令 In line with RoHS codes
- ◆ 线性调节率 (输入电压变化±1%时)±1.2%
 Line regulation (once input change±1%) ±1.2%
- ◆ 负载调节率(10%-100%满载) 15% Load regulation (10%-100% full load) 15%
- ◆ 纹波 / 噪声 (20MHz 带宽) <100mVp-p Ripple and noise (20MHz Band width) <100mVp-p



典型产品列表 Typical product tabulates

型号 TYPE	输入电压范围 Input voltage range	标称输出电压/输出电流 (Nominal output voltage / output current)					
		VO1			VO2		
		电压 (V) Output voltage	最小电流 Min mA	最大电流 Max mA	电压 (V) Output voltage	最小电流 Min mA	最大电流 Max mA
NN1-□S05B	5V (4.5~5.5VDC) 12V (10.8~13.2VDC) 24V (21.6~26.4VDC)	5V	20mA	200mA			
NN1-□S09B		9V	11mA	110mA			
NN1-□S12B		12V	8.3mA	83mA			
NN1-□S15B		15V	6.8mA	68mA			
NN1-□S24B		24V	4.2mA	42mA			
NN1-□D05B		+5V	10mA	100mA	-5V	10mA	100mA
NN1-□D09B		+9V	5.5mA	55mA	-9V	5.5mA	55mA
NN1-□D12B		+12V	4mA	40mA	-12V	4mA	40mA
NN1-□D15B		+15V	3.3mA	33mA	-15V	3.3mA	33mA
NN1-□D24B		+24V	2.1mA	21mA	-24V	2.1mA	21mA
NN1-□E05B		+5V	10mA	100mA	+5V	10mA	100mA
NN1-□E09B		+9V	5.5mA	55mA	+9V	5.5mA	55mA
NN1-□E12B		+12V	4mA	40mA	+12V	4mA	40mA
NN1-□E15B		+15V	3.3mA	33mA	+15V	3.3mA	33mA
NN1-□E24B		+24V	2.1mA	21mA	+24V	2.1mA	21mA

注：□代表输入电压标称值，因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

□Shows the nominal value of input voltage, due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.

封装尺寸 Mechanical Data


封装代号 Package code	L x W x H	
1 (单路输出 single output)	19.50 × 6.00 × 10.00mm	0.76 × 0.24 × 0.39inch
2 (两路正负输出 dual output)	19.50 × 6.00 × 10.00mm	0.76 × 0.24 × 0.39inch
3 (两路隔离输出 dual output isolated)	19.50 × 6.00 × 10.00mm	0.76 × 0.24 × 0.39inch

封装尺寸图 Mechanical Data

■ 封装尺寸 1 : 单路输出 (single route output)SIP

管脚代码	1	2	3	4	5	6	7
功能(Usage)	Vin	GND		-Vo		+Vo	


▲注: 所有单位尺寸为 mm, 所有相邻端子间距为 2.54mm, 所有端子直径为 0.65mm
 ▲Note:Aaa unit is mm,all neighboring pin distance is 2.54mm,all ping diameter is 0.65mm.

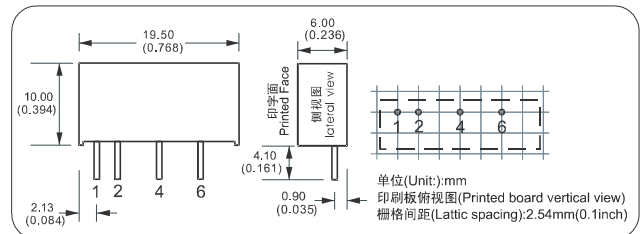

■ 封装尺寸 2 : 正负两路输出 (Duel route Positive and negative out)SIP

管脚代码	1	2	3	4	5	6	7
功能(Usage)	Vin	GND		-Vo	COM	+Vo	


▲注: 所有单位尺寸为 mm, 所有相邻端子间距为 2.54mm, 所有端子直径为 0.65mm
 ▲Note:Aaa unit is mm,all neighboring pin distance is 2.54mm,all ping diameter is 0.65mm.

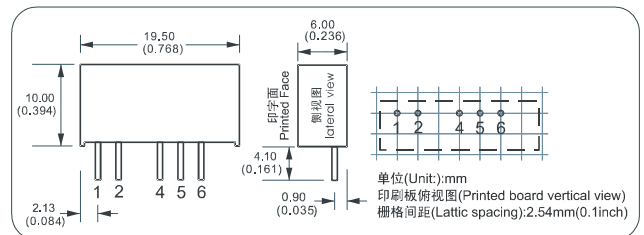

■ 封装尺寸 3 : 两路隔离输出 (Duel route isolation output)SIP

管脚代码	1	2	3	4	5	6	7
功能(Usage)	Vin	GND		-Vo1	+Vo1	-Vo2	+Vo2

▲注: 所有单位尺寸为 mm, 所有相邻端子间距为 2.54mm, 所有端子直径为 0.65mm
 ▲Note:Aaa unit is mm,all neighboring pin distance is 2.54mm,all ping diameter is 0.65mm.

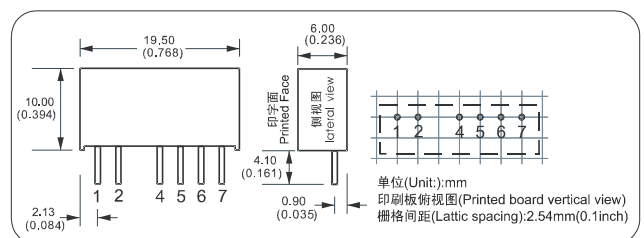

注意：电源模块的各管脚定义如与选型手册不符，应以实物标签上的标注为准。

Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management Modules](#) category:

Click to view products by [Aipu](#) manufacturer:

Other Similar products are found below :

[FPF1C2P5BF07A](#) [FH2000NPBAP](#) [LD05-23B12R2](#) [IF1205S-1WR3](#) [A1205XT-1WR3](#) [E1215XT-1WR3](#) [A0505S-1WR2](#) [A2415S-1WR2](#)
[F2405S-2WR3](#) [FD30-18S12B3](#) [IA0505KS-2W](#) [IA2412KS-2W](#) [B1212S-1W](#) [URA2412YMD-15WR3](#) [UWF1212S-1WR3](#) [VRA2405YMD-6WR3](#) [URB4805S-3WR3](#) [VRB2412YMD-20WR3](#) [B1215S-2WR3](#) [URB4815YMD-30WR3](#) [B1224S-1WR3](#) [B1505S-1WR3](#) [B2415XT-2WR3](#) [A1212S-1WR3](#) [B1215LS-1WR2](#) [B2405LS-1WR3](#) [VRB2405LD-15WR3](#) [HCS2-24D15](#) [RD5-12S24W](#) [RD5-110S05W](#) [RD5-110S12W](#) [RD25-5S12F](#) [MAS15-12-W](#) [MAS15-24-W](#) [FAS15-12-W](#) [RALT15-05H12-WIT](#) [RAS25-5-W](#) [RAS25-12-W](#) [RAS25-24-W](#) [BB-WSK-HAC-2](#) [LD15-23B03R2](#) [F1212S-1WR3](#) [TAS5-15-WEDT](#) [WRB1209S-3WR2](#) [ZY2424FLS-1W](#) [ZY0505AS-1W](#) [ZY2412IFS-1W](#) [ZY0512FS-1W](#) [B0505S-1WS](#) [NA03-T2S05](#)