

BODY CONTACTS OPTIONS

SERIES SIZE HARDWARE

PLUG

SERIES

MK .050" Rugged Metal PC Board Mount Connector ML .050" Rugged Plastic PC Board Mount Connector

(MK & ML mate with MK, ML, MM, MN, receptacles)

BODY

- 2 2-Row (Sizes 9 thru 37)
- 3 3-Row (Size 51 & 69***)
- 4 4-Row (Size 100)
- BODY STYLE:
- 5 Plug, right angle, narrow footprint, w/ mounting holes BODY MATERIAL:
- 1 Polyphenylene Sulfide (ML only)
- 2 Electroless nickel shell w/ PPS insulator
- 3 Electrodeposited cadmium shell w/ PPS insulator
- 4 Hard anodized black shell w/ PPS insulator
- 5 Stainless steel shell w/ PPS insulator

SIZE

XXX 009, 015, 021, 025, 031, 037, 051, 069***, 100

CONTACTS

TYPE CONTACTS/TERMINATIONS:

- 32 Pin, right angle, PCB leads, .109"
- 33 Pin, right angle, PCB leads, .140"
- 34 Pin, right angle, PCB leads, .172"
- PLATING OPTIONS:
- 3 50 µ" Au contacts: Au terminations
- 5 50 u" Au contacts: Sn/Pb alloy terminations 🗵
- 7 50 u" Au contacts: SAC305 terminations

HARDWARE

- STYLE OF HARDWARE:
- 00 None
- 22 Two fixed jacknuts (62*)
- Two turning jackscrews, allen head, retaining ring****(81*)
 Keying hardware, see options below (Body material 2, 3 and 4 only)
 - POLARIZATION / WIRING:
- 0R Reversed body polarization
- 0S Standard body polarization

OPTIONS

- KPXX Two fixed jacknuts (KN*)
- 94P Mil-Spec footprint (size 100 only), standard body polarization
- 0B7#2-56 threaded inserts, standard body polarization0BJMil-Spec footprint (size 100 only) with #2-56 threaded
- inserts, standard body polarization
 0H7 #4-40 threaded inserts (size 100 only), standard body polarization
- 0H6 Mil-Spec footprint (size 100 only) with #4-40 threaded inserts, standard body polarization

NOTES

- See page MA-6 for keying options
- * = Use numbers in parenthesis when ordering size 100.
- *** = 69 position connectors are available in metal only.
- **** = Connector body has no mounting holes.
- ☑ = Option not RoHS compliant

RECEPTACLE

SERIES

MK .050" Rugged Metal PC Board Mount Connector ML .050" Rugged Plastic PC Board Mount Connector (MK & ML mate with MK, ML, MM, MN plugs)

BODY

- 2 2-Row (Sizes 9 thru 37)
- 3 3-Row (Size 51 & 69***)
- 4 4-Row (Size 100)
- BODY STYLE:
- 6 Receptacle, right angle, narrow footprint, w/ mounting holes BODY MATERIAL:
- 1 Polyphenylene Sulfide (ML only)
- 2 Electroless nickel shell w/ PPS insulator
- 3 Electrodeposited cadmium shell w/ PPS insulator
- 4 Hard anodized black shell w/ PPS insulator
- 5 Stainless steel shell w/ PPS insulator

SIZE

XXX 009, 015, 021, 025, 031, 037, 051, 069***, 100

CONTACTS

- TYPE CONTACTS/TERMINATIONS:
- 43 Socket, right angle, PCB leads, .109'
- 44 Socket, right angle, PCB leads, .140"
- 45 Socket, right angle, PCB leads, .172"
- PLATING OPTIONS:
- 3 50 µ" Au contacts: Au terminations
- 5 50 μ " Au contacts: Sn/Pb alloy terminations \boxtimes
- 7 50,u" Au contacts: SAC305 terminations

HARDWARE

- STYLE OF HARDWARE:
- 00 None
- 22 Two fixed jacknuts (62*)
- 41 Two turning jackscrews, allen head, retaining ring****(81*)
- 99 Keying hardware, see options below (Body material 2, 3 and 4 only)
- POLARIZATION / WIRING:
- 0R Reversed body polarization 0S Standard body polarization
- 55 Standard body polarizat


OPTIONS

- KPXX Two fixed jacknuts (KN*) and interfacial sealing gasket.
- 900 Interfacial sealing gasket
- 0B7 #2-56 Threaded inserts and interfacial sealing gasket standard body polarization
- 0H7 #4-40 threaded inserts (size 100 only), and interfacial sealing gasket, standard body polarization

NOTES

- See page MA-6 for keying options
- * = Use numbers in parenthesis when ordering size 100.
- *** = 69 position connectors are available in metal only.
- **** = Connector body has no mounting holes.
- \boxtimes = Option not RoHS compliant

Ask About AirBorn's Accelerated Delivery Service

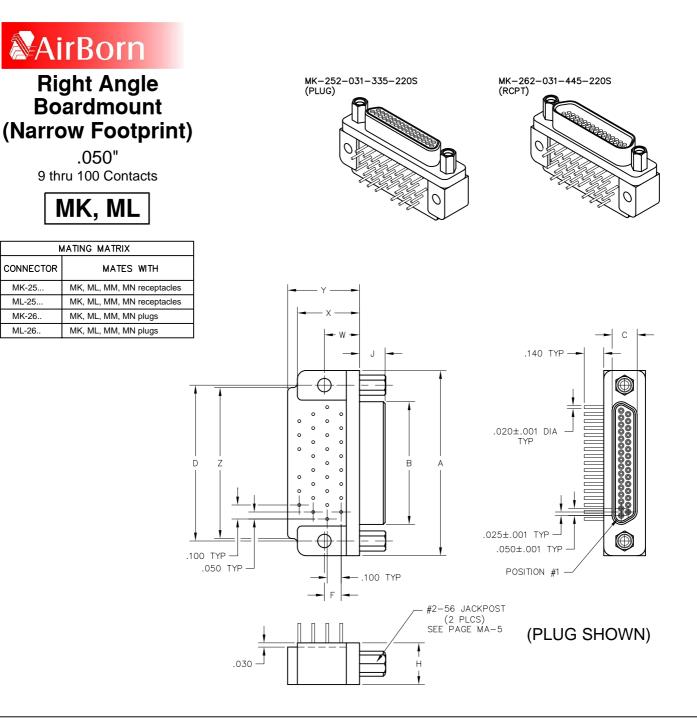

DIMENSIONS																	
SIZE	CONTACT ROWS	A	B		C					J							
			PLUG MAX	RCPT MAX	PLUG MAX	RCPT MAX	D	F	H	PLUG	RCPT	w	MÂX	мах	Z	HARDWARE	MOUNTING HOLE
9		.775	.334	.400	.185		.565	.020		.183	.195	.250	.420	.420	.775	#2-56 UNC THD	.096 DIA OR #2–56 UNC THREADED INSERT
15		.925	.484	.550			.715		.298						.925		
21	2	1.075	.634	.700		.251	.865	.120							1.075		
25	2	1.175	.734	.800		.251	.965	.120	.290						1.175		
31		1.325	.884	.950			1.115						.450	.520	1.080		
37		1.475	1.034	1.100			1.265								1.180		
51	3	1.425	.984	1.050	.228	.294	1.215	.150	.341			.300	.430	.650	1.220		
69	3	1.725	1.284	1.350		.294	1.515							.755	1.450		
100	4	2.160	1.384	1.508	.271	.394	1.800	.200	.384]		.400	.590	1.000	1.810	#4-40 UNC THD	.125 DIA
				· ·													#2-56 UNC INSERT
																	#4-40 UNC INSERT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub MIL Spec Connectors category:

Click to view products by AirBorn manufacturer:

Other Similar products are found below :

M85049/50-5F D38999/24WG11PB-LC MDM-9SH006A 850-056-0812 1218697-4 D38999/26WJ61PC L/C 1484349-1 17D25HV 1996840-1 243082-15 1757682-1 17D-E51218-1 17SDA15S 1883533-1 1883886-1 1883889-1 192900-0377 M24308/8-347 M83513/03-E09C 443961-3 5-1218949-1 550-031NF1R6K 3-1236089-2 550E001NF1R3J0L 550T001NF1R6K0L 557T283NF5B08 DC121073157 443869-3 443869-4 443869-5 550S004NF1R1B0F03 557E283NF1A06 527-019NF0303R2K1F 5-446405-1 550-031NF1R2E 550E003M2R9J0F04 550E003M3R9J0F05 550E024M104R9J0 550E024NF102R3J0B 550E039NF1R3J1-02 550S003M3R9B0F05 550S004M4R7M0F04 550S004NF1R1B1F02 550S008M3F0K0F04 550S086M5R3J0L 550S100NF3F0E 550T001M2R7E0L 550T001NF1F0B1L 550T001NF1R1K0G 550T001NF1R3K0G