

Board (Narrow Footprint) to Cable

.050"


9 thru 51 Contacts

Low Profile Board Mount High Temperature

MSHT


Low Profile Cable High Temperature


MQHT

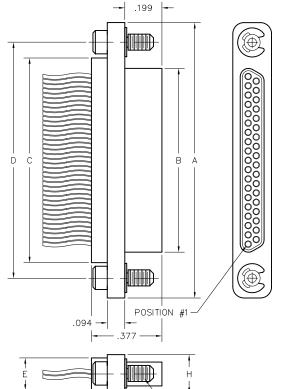

PLUG

#2-56 JACKSCREW (2 PLCS) SEE PAGE MA-5

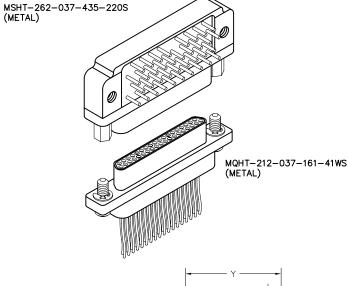

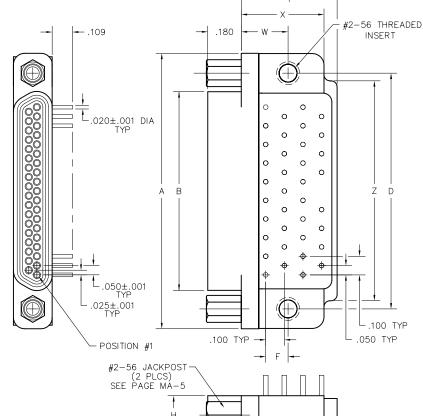

RECEPTACLE

	DIMENSIONS													
	CONTACT		В				E			v	~			
SIZE	ROWS	Α	PLUG MAX	RCPT MAX	С	D	POTTING WELL MAX	F	Н	W	мÂх	MAX	Z	HARDWARE
9		.778	.292	.378	.398	.565		.020					.775	
15	2	.928	.442	.528	.548	.715	.173	.120	.208	.250	.420	.420	.925	#2-56 UNC THD
21		1.078	.592	.678	.698	.865							1.075	
25		1.178	.692	.778	.798	.965							1.175	
31		1.328	.842	.928	.948	1.115					.450	.520	1.080	
37		1.478	.992	1.078	1.098	1.265					.450		1.180	
51	3	1.428	.942	1.028	1.048	1.215	.220	.150	.250	.300	.425	.650	1.220	



Recommended PC Board Layout

Right Angle, Narrow Footprint Standard Polarization







15 POSITION



21 POSITION



25 POSITION



31 POSITION



37 POSITION







CONNECTOR MATING FACE



PC BOARD LAYOUT COMPONENT SIDE

RECEPTACLE PC BOARD LAYOUT COMPONENT SIDE

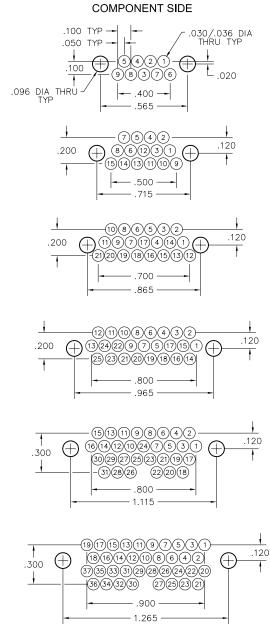





PLUG: MQHT-212-037-161-41WS

RECEPTACLE: MSHT-262-037-433-220S

PLU	JG	RE	CEPTACLE	XXXX-XXX-XXX-XXXX				
	Si	ERIES						
MQHT .050" Low Profile Metal I/O Connector (MQHT mates with MQHT & MSHT receptacles)			HT .050" Low Profile Metal PC Board Mount Con SHT mates with MQHT plugs)	inector				
	E	ODY						
2	2-Row (Sizes 9 thru 37) 3-Row (Size 51)	2 3	2-Row (Sizes 9 thru 37) 3-Row (Size 51)					
1	BODY STYLE: Plug, straight, with ears. High temperature.	6	BODY STYLE: Receptacle, right angle, narrow footprint, w/ threinserts. High temperature.	eaded				
2	BODY MATERIAL: High temperature thermoplastic with electroless nickel shell	BODY MATERIAL: 2 High temperature thermoplastic with electroless nickel shell						
	5	SIZE						
XXX	009, 015, 021, 025, 031, 037, 051	xxx	X 009, 015, 021, 025, 031, 037, 051					
	CON	NTACT	S					
14 15	TYPE CONTACTS/TERMINATIONS: Pin, straight, solder cup Pin, straight, .500" pigtails (.018 dia) Pin, straight, 1.000" pigtails (.018 dia) Pin, straight, crimped wire	43 44 45	TYPE CONTACTS/TERMINATIONS: Socket, right angle, dip solder, .109" x .020" dia Socket, right angle, dip solder, .140" x .020" dia Socket, right angle, dip solder, .172" x .020" dia	i				
1 3	PLATING OPTIONS: 50 µ" Au contacts (crimp wire) 50 µ" Au contacts: 10 µ" Au terminations (solder cup, pigtail)	3	PLATING OPTIONS: 50 μ" Au contacts: 10 μ" Au terminations					
	HAF	DWAR	RE					
41 42 43 44	STYLE OF HARDWARE: None Two turning jackscrews, allen head, retaining ring Two long turning jackscrews, allen head, retaining ring Two turning jackscrews, slot head, retaining ring Two long turning jackscrews, slot head, retaining ring Two long turning jackscrews, allen head, captivated*	00 22	STYLE OF HARDWARE: None Two fixed jacknut assemblies					
	POLARIZATION / WIRING: None For wiring codes, see page MA-3 & MA-4	08	POLARIZATION / WIRING Standard body polarization					

^{* =} Captive hardware is factory installed and non-removable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub MIL Spec Connectors category:

Click to view products by AirBorn manufacturer:

Other Similar products are found below:

M85049/50-5F MDM-15PH006M7-A174 MDM-15SH001M7-A174 MDM-15SH003M7-A174 MDM-15SH006M7-A174 MDM-21PH046F MDM-21SH006B-A174 MDM-21SH006P-A174 MDM-21SH011P MDM-21SH011P-A174 MDM-21SH034B-A174 MDM25SL61P 850-056-0812 1218697-4 DA-59-20 1484349-1 17D25HV 1996840-1 243082-15 308-CP3C1001-076 1757682-1 17D-E51218-1 17SDA15S 1883889-1 192900-0377 308-CP6P0441-024H M83513/03-E09C 443961-3 MDM-15PH001F MDM-15PH001P-A174 MDM-15PH011P MDM-15PH011P-A174 MDM-15SH011F-A174 MDM-15SH011F-A174 MDM-15SH011P-A174 MDM-21PH041F MDM-21PH048F MDM-21SH003K-F222 MDM-21SH046B-A174 MDM-25PH001M7-A174 MDM-25SH011P MDM-9SH001F MDM-9SH006P-A174 5-1218949-1 550-031NF1R6K 3-1236089-2 550E001NF1R3J0L