




R Series High-Density 0.075" (1.905mm)

RM – Three-Row, Right-Angle, Board-Mount Plug

Contact Spacing: 0.075" (1.91 mm)
R-Series products are high-density, plastic connectors commonly used in board-to-board applications. Approved to MIL-55302 standard.

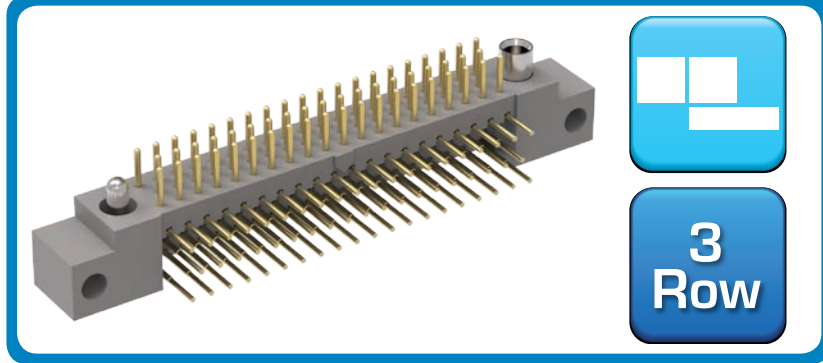

Sample Part Number Format: RM352-152-321-5500

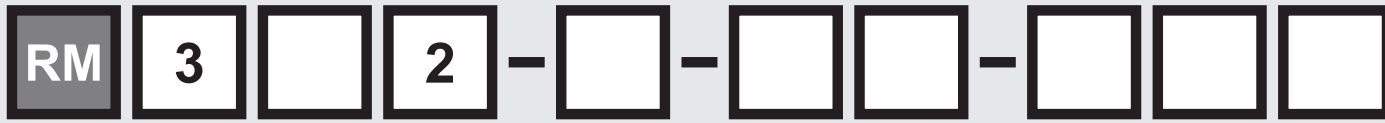

| SERIES | ROWS | STYLE | BODY MATERIAL | SIZE | PLATING | POLARIZATION | OPTIONS |
|---|-----------------------------|---|---------------------------------|--|--|---|--|
| 0.075" Plastic Rectangular Connector (Plug) | 3 – 3-Row (11-206 contacts) | 5 – Plug, right-angle with mounting ears 7 – Plug, right-angle without mounting ears | 2 – Polyphenylene sulfide (PPS) | 011 – 11 contacts 023 – 23 contacts 035 – 35 contacts 047 – 47 contacts 059 – 59 contacts 071 – 71 contacts 080 – 80 contacts 092 – 92 contacts 104 – 104 contacts 122 – 122 contacts 140 – 140 contacts 152 – 152 contacts 182 – 182 contacts 206 – 206 contacts | 1 – Gold 2 – Pre-tinned, SnPb alloy ‡ 3 – Pre-tinned, SAC305 alloy | 00 – None XX – See page 140 for codes 70 – Same as above, but without Loctite® (customer-keyed) | BN – Bond #1-72, small pattern hex nuts into mounting ears |
| | | | | TERMINATION 31 – Plated thru-hole, 0.109" x 0.020" Ø 32 – Plated thru-hole, 0.140" x 0.020" Ø 33 – Plated thru-hole, 0.172" x 0.020" Ø 34 – Plated thru-hole, 0.109" x 0.016" Ø 35 – Plated thru-hole, 0.140" x 0.016" Ø 36 – Plated thru-hole, 0.172" x 0.016" Ø 37 – Plated thru-hole, 0.250" x 0.020" Ø | HARDWARE 0256 – None 55 – Guide set 57 – Two guide pins 58 – Two guide sockets 29 – Fixed jackset 30 – Fixed jackset, reversed 19 – Two fixed jackscrews 20 – Two fixed jackscrews 59 – Hex turning jackset, 0.200" 60 – Hex turning jackset reversed, 0.200" 61 – Two hex turning jackscrews, 0.200" 62 – Two hex turning jackscrews, 0.200" 64 – Turning jackset, 0.490" | | |

Notes:
‡ Not RoHS-compliant

PLEASE CONSULT THE AIRBORN WEBSITE FOR THE LATEST REVISION OF THIS DOCUMENT PRIOR TO BEGINNING ANY DESIGN WORK.

Mates with





- RM322 & RM342 — Three-row, straight receptacle
- RM362 & RM382 — Three-row, right-angle receptacle
- RA3 — Three-row, I/O receptacle

Terminations



RM – Three-Row, Right-Angle, Board-Mount Plug

Plastic ▪ 3-Row ▪ 11-206 Contacts

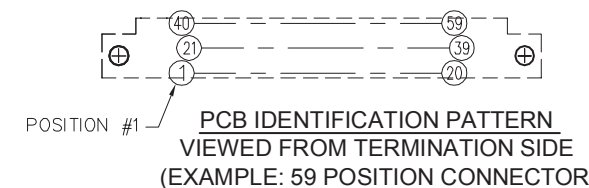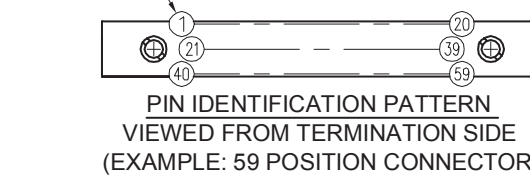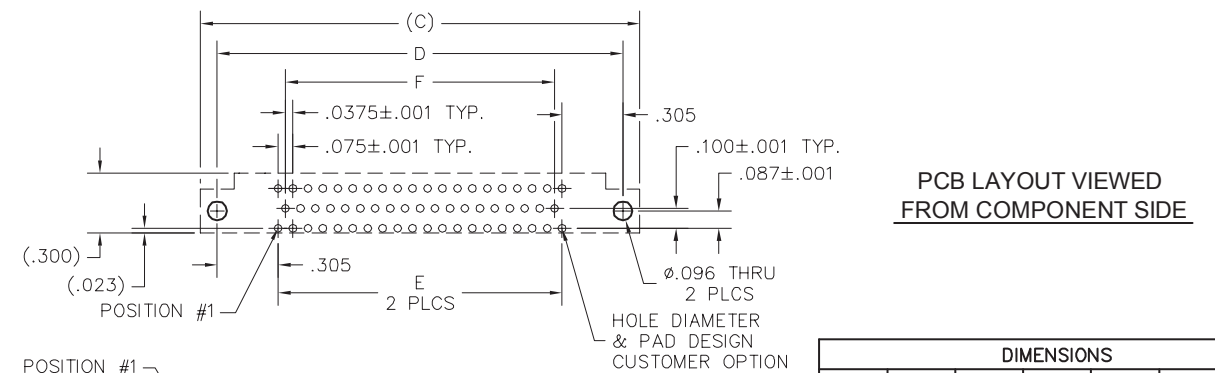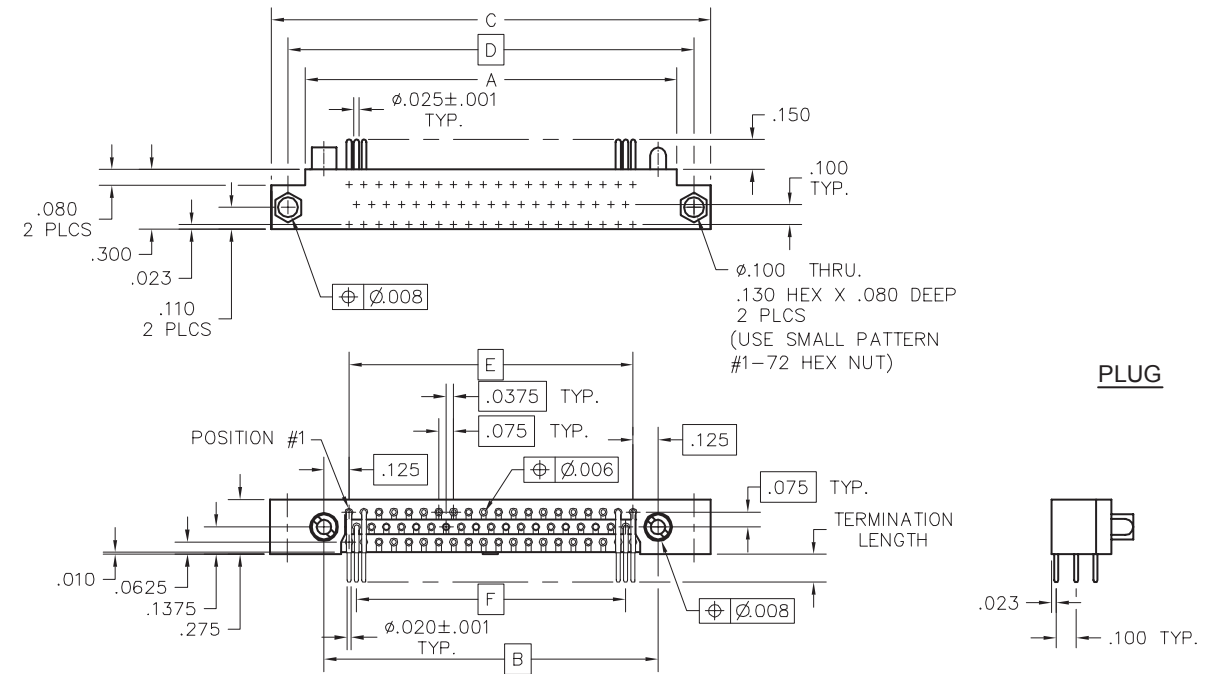

| DIMENSIONS | | | | | | |
|------------|-------|-------|-------|-------|-------|-------|
| SIZE | A | B | C | D | E | F |
| 11 | .665 | .475 | 1.005 | .835 | .225 | .150 |
| 23 | .965 | .775 | 1.305 | 1.135 | .525 | .450 |
| 35 | 1.265 | 1.075 | 1.605 | 1.435 | .825 | .750 |
| 47 | 1.565 | 1.375 | 1.905 | 1.735 | 1.125 | 1.050 |
| 59 | 1.865 | 1.675 | 2.205 | 2.035 | 1.425 | 1.350 |
| 71 | 2.165 | 1.975 | 2.505 | 2.335 | 1.725 | 1.650 |
| 80 | 2.390 | 2.200 | 2.730 | 2.560 | 1.950 | 1.875 |
| 92 | 2.690 | 2.500 | 3.030 | 2.860 | 2.250 | 2.175 |
| 104 | 2.990 | 2.800 | 3.330 | 3.160 | 2.550 | 2.475 |
| 122 | 3.440 | 3.250 | 3.780 | 3.610 | 3.000 | 2.925 |
| 140 | 3.890 | 3.700 | 4.230 | 4.060 | 3.450 | 3.375 |
| 152 | 4.190 | 4.000 | 4.530 | 4.360 | 3.750 | 3.675 |
| 182 | 4.940 | 4.750 | 5.280 | 5.110 | 4.500 | 4.425 |
| 206 | 5.540 | 5.350 | 5.880 | 5.710 | 5.100 | 5.025 |

PLEASE CONSULT THE AIRBORN WEBSITE FOR THE LATEST REVISION OF THIS DOCUMENT PRIOR TO BEGINNING ANY DESIGN WORK.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectangular MIL Spec Connectors](#) category:

Click to view products by [AirBorn](#) manufacturer:

Other Similar products are found below :

[M32139/03-B06ST](#) [65002-062](#) [CY4602-000](#) [77058-22-55PN](#) [86.030.0053.0](#) [GMCT26M0E100JC](#) [1241346-1](#) [MSO34MPK1E1](#)
[BACC65CAMA](#) [HSB-D4S03DM222X](#) [2217548-1](#) [890-009-31SA2-BRT1T](#) [27963-20T12](#) [SIM2N40NC3](#) [SIM2S100A](#) [1604996-2](#)
[SMD25PN90L-4055](#) [22628-10-6P-791](#) [GMCT66F0T0000](#) [M32139/03-G05SN](#) [CTD160E01F-6148](#) [CTJ112E03B](#) [CTJ122E02D-8000](#) [CTJ-](#)
[3D-12](#) [CTJ920E06N-513](#) [CTL-16-090](#) [CY4600-000](#) [CY4601-000](#) [38111-14-15SN](#) [38112-14-15PN](#) [TMN2N037PC2DM018S](#)
[TMN2N051SC2DM018T](#) [MMA23-0111R1](#) [MMD25-0071P1](#) [33516062020](#) [33526M11-08PE](#) [33526M11-08PN](#) [3355-5869-000](#) [DMC-M99-](#)
[01AN](#) [Y59113WE20PNV00300](#) [ZPF000000000106310](#) [105979-31](#) [MTCPK1PJC02S](#) [SIM2N40NC1](#) [SIM2N40NC2](#) [SIM2S110A](#)
[SIME2022PNR](#) [787-0015-02](#) [TMN2N009SC2DM018T](#) [TMN2N025PC2DM018S](#)