ALPHA WIRE COMPANY CUSTOMER PRODUCT SPECIFICATION

Part Number: 545 Issue: 3

Page 1 of 2 Pages Issue Date: 1/10/2006 Effective Date: 1/30/2006

A. Cordage Construction

1) Conductor

a) Material Bare Copper, per ASTM B-3

b) AWG, Stranding 18 (41/34) AWG; Finer stranding may be used.

2) Insulation

a) Material PVCb) Nominal Diameter 0.077

3) Core Assembly

a) Number of Conductors 3

b) Color Code Black, White & Green or Green/Yellow.

[Note: The stripe of the Green/Yellow insulation shall be 50% +/- 20%.]

c) Fillers Optional
d) Separator Tissue Paper

4) Jacket

a) Material PVC

b) Surface Finish Smooth, non-striated


c) Nominal Diameter 0.250 d) Color Black

e) UL, CSA Type SVT, Minimum**

f) Jacket Marking Per UL Standard 62 and CSA C22.2 No. 49.

B. Cord Configuration

End 1
 End 2
 Molded Vinyl Grounding Plug, NEMA 5-15P
 Molded Vinyl Grounding Connector, IEC 320-C13
 Mold Color
 Black
 Overall Length
 90" +/- 2"

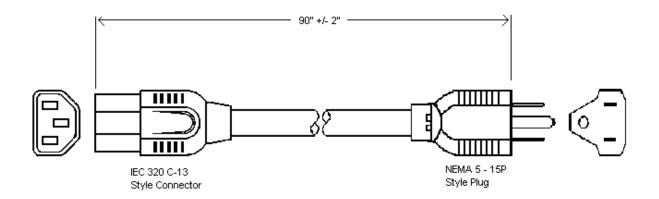

Although Alpha Wire Company ("Alpha") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Alpha provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Alpha be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Alpha has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

^{**} Cordage Types with a UL/CSA rating greater than Type SVT may be substituted.

ALPHA WIRE COMPANY CUSTOMER PRODUCT SPECIFICATION

Part Number: 545 Issue: 3

Page 2 of 2 Pages Issue Date: 1/10/2006 Effective Date: 1/30/2006

C. Industry Approvals and Ratings

 1) UL
 UL Standard 62 & 817

 2) CSA
 CSA C22.2 No. 21 &No. 49

 3) Cord Set Rating
 1250 Watts 10A-125V

4) Temperature Rating 60°C, Minimum

D. Packaging

1) Standard Package 25 Pieces, Hanked and Tied

Although Alpha Wire Company ("Alpha") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Alpha provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Alpha be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Alpha has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AC Power Leads category:

Click to view products by Alpha manufacturer:

Other Similar products are found below:

62500-1774 1300000023 312033-01 YP-61+YC12 P28818-M2 YP21A+YC13 FTP-629Y603 1702002600 1700001947 J2014004L001-CC SHELF IL13-EU1-H05-3100-300-S P28976-M45 BB-3271V86 W-97277 W-97278 W-97279 W-97204 W-97895 W-98437 W-98452 W-98453 MWOC-PCA-3-3-2 P29844-M5 P29844-M10 W-99245 W-99246 W-99249 W-99251 W-99252 W-99253 W-99254 W-99257 W-99260 W-99261 W-99262 W-99265 W-99267 W-99269 W-99270 W-99272 W-99280 W-99282 S144720002 S002020062 S007220315 S007220344 S007220303 S007220307 P28818-M6 1019123