


Ultra Precision Power Resistor (8 Watts, TO-220)

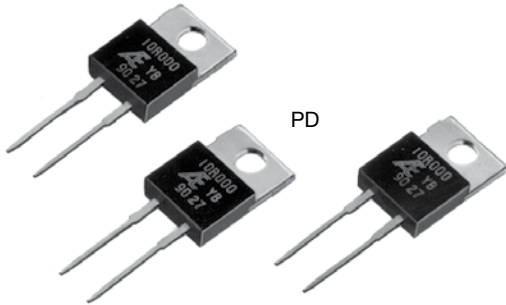

COMPOSITION OF TYPE NUMBER

Example:

PD X 50R000 B

Diagram showing the breakdown of the type number PD X 50R000 B:

- PD: Type
- X: TCR
- 50R000: Resistance Value
- B: Tolerance


Resistance value, in ohm, is expressed by a series of six characters, five of which represent significant digits. R or K is a dual-purpose letter that designates both the value range (R for ohmic; K for kilo-ohm) and the location of decimal point.

CONFIGURATION (DIMENSIONS IN mm)



Type	PD
L	10.6 max.
W	19.0±0.5
W ₁	8.5±0.2
W ₂	6.5±0.2
W ₃	2.7±0.5
T	4.5±0.2
T ₁	2.0±0.5
T ₂	1.5±0.2
F	5.08±0.5
l	11.0±2
t	0.5±0.05
a	1.2±0.1
b	0.75±0.05
D	Dia. 3.6

TCR, RESISTANCE RANGE, TOLERANCE, RATED POWER				
Type	TCR (ppm/°C) -25°C to +125°C*	Resistance Range (Ω)	Resistance Tolerance (%)†	Rated Power (W) at 25°C
PD	0±15 (W)	0.1 to 1	±1 to ±5 (F, G, J)	1.5 In free air and 8 On heat sink**
		1 to 5	±0.5 to ±5 (D, F, G, J)	
	0±5 (X) 0±2.5 (Y)	5 to 10	±0.1 to ±5 (B, D, F, G, J)	
		10 to 25	±0.05 to ±5 (A, B, D, F, G, J)	
		25 to 10k	±0.02 to ±5 (Q, A, B, D, F, G, J)	

* Symbols in parentheses are for type number composition.
 † Resistance figures are the values obtained by measuring the leads at point 5.08±0.6 mm away from the root.
 ** For heat sinking, an aluminum chassis in 152.4 (L) x 101.6 (W) x 50.8 (H) x 1.0 mm (T) should be used.

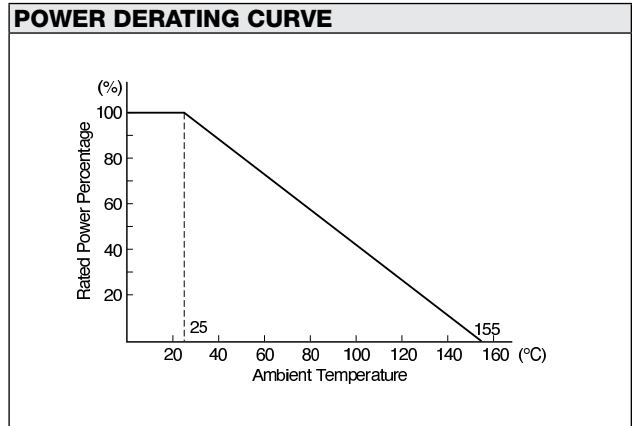

PERFORMANCE			
Parameters	Test Condition	MIL-R-39009 Specification	ALPHA Typical Test Data
Maximum Rated Operating Temperature Working Temperature Range Maximum Working Voltage Maximum Working Current			25°C -55°C to +155°C 250V 4A
Power Conditioning	25°C, Rated Voltage, 96 hrs.	±0.2%	±0.02%
Low Temperature Storage Dielectric Withstanding Voltage Insulation Resistance Low Temperature Operation Overload Moisture Resistance Terminal Strength	-55°C, No Load, 24 hrs. Atmo. Pres.: AC 1 kV, 1 min. Baro. Pres. 8 mHg: AC 500V, 1min. DC 500V, 2 min. -55°C, Rated Voltage Rated Voltage x 2.5, 5 sec. +65°C to -10°C, 90% RH to 98% RH, Rated Voltage, 10 cycles (240 hrs.) 0.908 kg (2 pounds), 10 sec.	±0.3% ±0.2% over 10,000 MΩ ±0.3% ±0.3% ±0.5% ±0.2%	±0.005% ±0.005% over 10,000 MΩ ±0.005% ±0.01% ±0.05% ±0.005%
Shock Vibration, High Frequency	100G, 6 ms, Sawtooth Wave, X, Y, Z, each 3 shocks 20G, 10 Hz to 2,000 Hz to 10 Hz, 20min., X, Y, Z, each 4 hrs.	±0.02% ±0.02%	±0.005% ±0.005%
Life	25°C, Rated Power, 1.5 hr. – ON, 0.5 hr. – OFF, 2,000 hrs.	±1.0%	±0.01%
High Temperature Exposure	155°C, No Load, 2,000 hrs.	±1.0%	±0.01%
Solderability	245°C, 5 sec.	over 95% coverage	

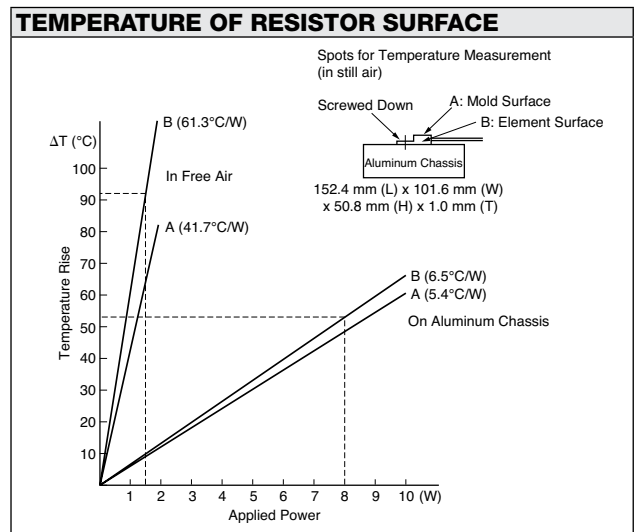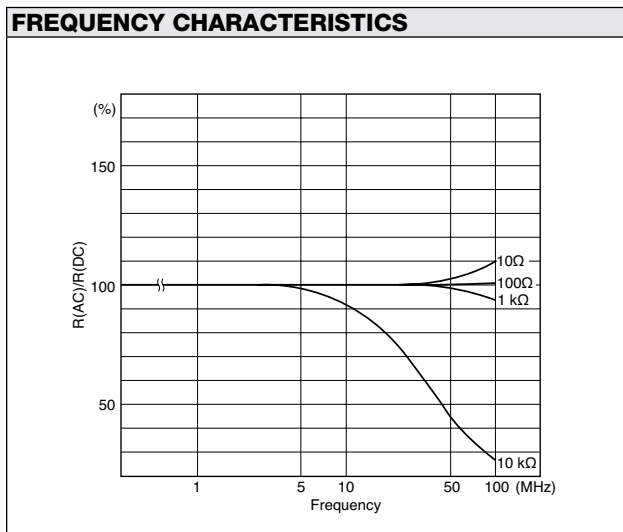

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Metal Foil Resistors - Through Hole category](#):

Click to view products by [ALPHA manufacturer](#):

Other Similar products are found below :

[Y00891K50000TR13L](#) [Y09450R10000B0L](#) [Y2010025110R000T9L](#) [Y2010130150R000T9L](#) [Y008915K0000BR0L](#) [Y000747K0000B0L](#)
[Y008934K0000BR0L](#) [Y000710K0000V9L](#) [Y0019226R000V9L](#) [Y00778K25000B9L](#) [Y000725K5000B0L](#) [Y00777K25000B9L](#)
[Y000735K2700B0L](#) [Y000723K5240B0L](#) [Y0007138R500T9L](#) [Y006212R5000A0L](#) [Y000734K0000B0L](#) [Y0058500R000F0L](#)
[Y008980K6000TR0L](#) [RTO050F15R00JTE3](#) [RTO050F22R00JTE3](#) [AP851-22RJ](#) [AP821-22RJ](#) [AP830-2R5F](#) [RTO050F100R0JTE3](#) [AP851-](#)
[2K2J](#) [Y0007100R000T0L](#) [Y000710K0000B9L](#) [Y000710K0000T0L](#) [Y000710R0000F9L](#) [Y0007120R000T9L](#) [Y0007130R000V0L](#)
[Y00071K00000T9L](#) [Y00071K00000V0L](#) [Y000725K0000V0L](#) [Y0007350R000T9L](#) [Y00074K99000T0L](#) [Y000750K0000T0L](#)
[Y000750R0000T0L](#) [Y000757K9830T9L](#) [Y006259R4000B0L](#) [Y00622K91000B0L](#) [Y00073R74000F0L](#) [Y000711K4000B0L](#)
[Y00075K00000B0L](#) [Y00079K00000T0L](#) [Y0011349K650Q9L](#) [Y0011500K000T0L](#) [Y0028100K000T0L](#) [Y0028200K000T0L](#)