

General Description

- Latest AlphaIGBT (αIGBT) Technology
- 650V Breakdown Voltage
- High Efficient Turn-On di/dt Controllability
- Very High Switching Speed
- Low Turn-Off Switching Loss and Softness
- Very Good EMI Behavior

Applications


- PFC Circuits
- Very High Switching Frequency Applications

Product Summary


V_{CE}	650V
I_C ($T_C=100^\circ\text{C}$)	40A
$V_{CE(sat)}$ ($T_J=25^\circ\text{C}$)	2.05V



TO-247



AOKS40B65H2AL



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOKS40B65H2AL	TO247	Tube	240
Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted			
Parameter	Symbol	AOKS40B65H2AL	Units
Collector-Emitter Voltage	V_{CE}	650	V
Gate-Emitter Voltage	V_{GE}	± 30	V
Continuous Collector Current	I_C	$T_C=25^\circ\text{C}$	80
		$T_C=100^\circ\text{C}$	40
Pulsed Collector Current, Limited by T_{Jmax}	I_{CM}	120	A
Turn off SOA, $V_{CE} \leq 650\text{V}$, Limited by T_{Jmax}	I_{LM}	60	A
Power Dissipation	P_D	$T_C=25^\circ\text{C}$	260
		$T_C=100^\circ\text{C}$	105
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds	T_L	300	$^\circ\text{C}$
Thermal Characteristics			
Parameter	Symbol	AOKS40B65H2AL	Units
Maximum Junction-to-Ambient	$R_{\theta JA}$	40	$^\circ\text{C/W}$
Maximum IGBT Junction-to-Case	$R_{\theta JC}$	0.48	$^\circ\text{C/W}$

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
STATIC PARAMETERS							
BV _{CES}	Collector-Emitter Breakdown Voltage	I _C =1mA, V _{GE} =0V, T _J =25°C	650	-	-	V	
V _{CE(sat)}	Collector-Emitter Saturation Voltage	V _{GE} =15V, I _C =40A	T _J =25°C	-	2.05	2.6	V
			T _J =125°C	-	2.57	-	
			T _J =150°C	-	2.71	-	
V _{GE(th)}	Gate-Emitter Threshold Voltage	V _{CE} =5V, I _C =1mA	-	4.7	-	V	
I _{CES}	Zero Gate Voltage Collector Current	V _{CE} =650V, V _{GE} =0V	T _J =25°C	-	-	10	μA
			T _J =125°C	-	-	500	
			T _J =150°C	-	-	5000	
I _{GES}	Gate-Emitter leakage current	V _{CE} =0V, V _{GE} =±30V	-	-	±100	nA	
g _{FS}	Forward Transconductance	V _{CE} =20V, I _C =40A	-	24	-	S	
DYNAMIC PARAMETERS							
C _{ies}	Input Capacitance	V _{GE} =0V, V _{CC} =25V, f=1MHz	-	1275	-	pF	
C _{oes}	Output Capacitance		-	88	-	pF	
C _{res}	Reverse Transfer Capacitance		-	44	-	pF	
Q _g	Total Gate Charge	V _{GE} =15V, V _{CC} =520V, I _C =40A	-	61	-	nC	
Q _{ge}	Gate to Emitter Charge		-	18	-	nC	
Q _{gc}	Gate to Collector Charge		-	27	-	nC	
R _g	Gate resistance	V _{GE} =0V, V _{CC} =0V, f=1MHz	-	11	-	Ω	
SWITCHING PARAMETERS, (Load Inductive, T_J=25°C)							
T _{d(on)}	Turn-On Delay Time	T _J =25°C V _{GE} =15V, V _{CC} =400V, I _C =40A, R _G =7.5Ω E _{on} and E _{total} include diode (AOK40B65H2AL) reverse recovery	-	30	-	ns	
T _r	Turn-On Rise Time		-	30	-	ns	
T _{d(off)}	Turn-Off Delay Time		-	117	-	ns	
T _f	Turn-Off Fall Time		-	16	-	ns	
E _{on}	Turn-On Energy		-	1.17	-	mJ	
E _{off}	Turn-Off Energy		-	0.54	-	mJ	
E _{total}	Total Switching Energy		-	1.71	-	mJ	
SWITCHING PARAMETERS, (Load Inductive, T_J=150°C)							
T _{d(on)}	Turn-On Delay Time	T _J =150°C V _{GE} =15V, V _{CC} =400V, I _C =40A, R _G =7.5Ω E _{on} and E _{total} include diode (AOK40B65H2AL) reverse recovery	-	29	-	ns	
T _r	Turn-On Rise Time		-	35	-	ns	
T _{d(off)}	Turn-Off Delay Time		-	133	-	ns	
T _f	Turn-Off Fall Time		-	18	-	ns	
E _{on}	Turn-On Energy		-	1.27	-	mJ	
E _{off}	Turn-Off Energy		-	0.78	-	mJ	
E _{total}	Total Switching Energy		-	2.06	-	mJ	

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

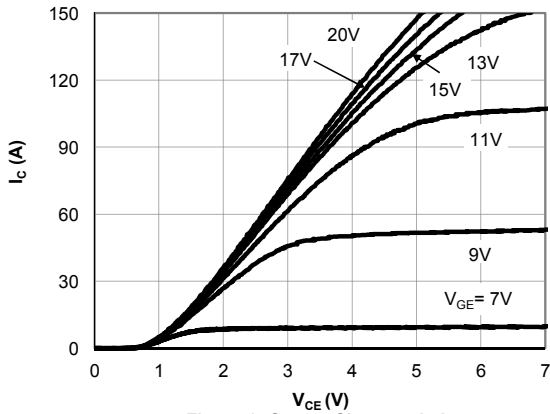


Figure 1: Output Characteristic ($T_j=25^\circ\text{C}$)

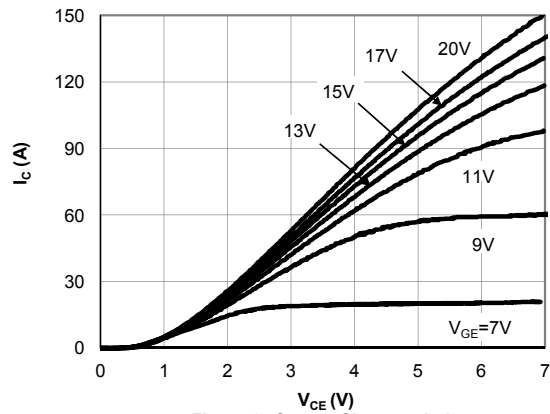


Figure 2: Output Characteristic ($T_j=150^\circ\text{C}$)

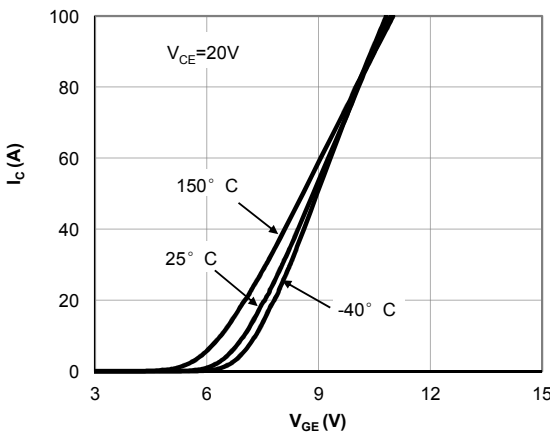


Figure 3: Transfer Characteristic

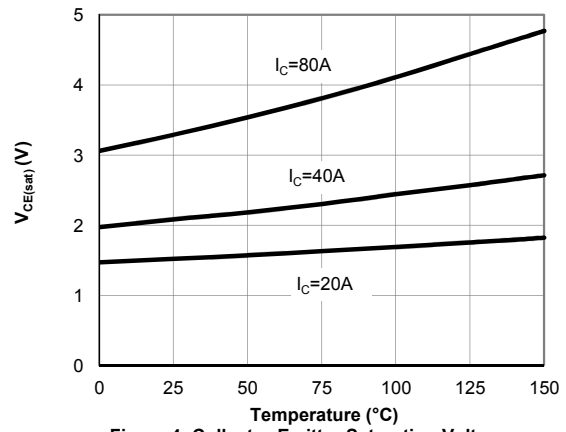


Figure 4: Collector-Emitter Saturation Voltage vs. Junction Temperature

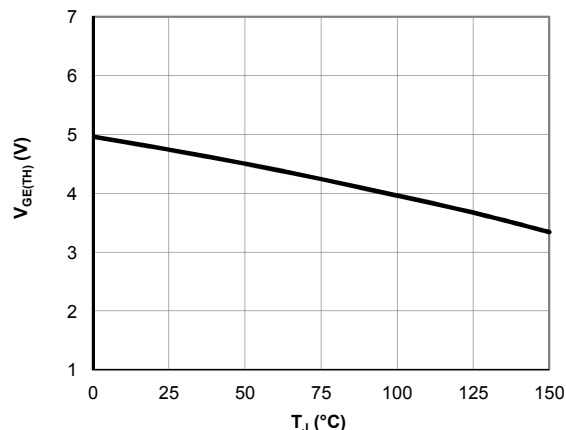


Figure 5: $V_{GE(TH)}$ vs. T_j

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

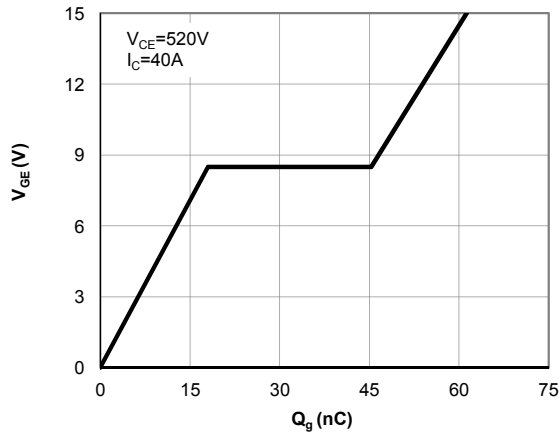


Figure 6: Gate-Charge Characteristics

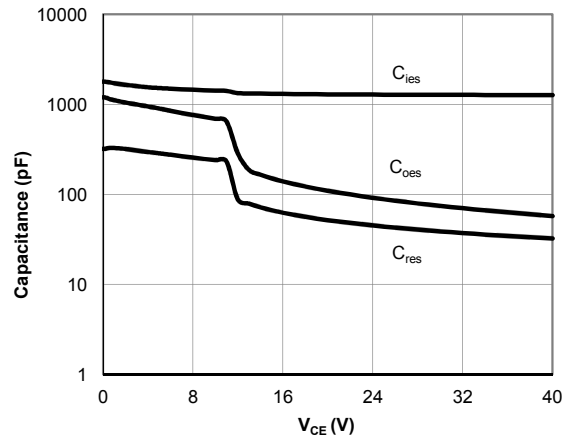


Figure 7: Capacitance Characteristic

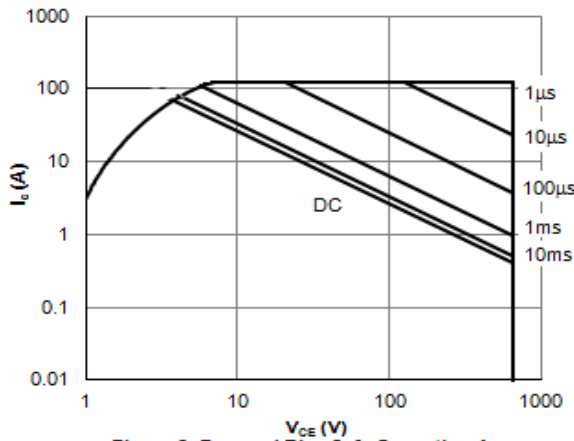


Figure 8: Forward Bias Safe Operating Area
($T_c=25^\circ\text{C}$, $V_{GE}=15\text{V}$)

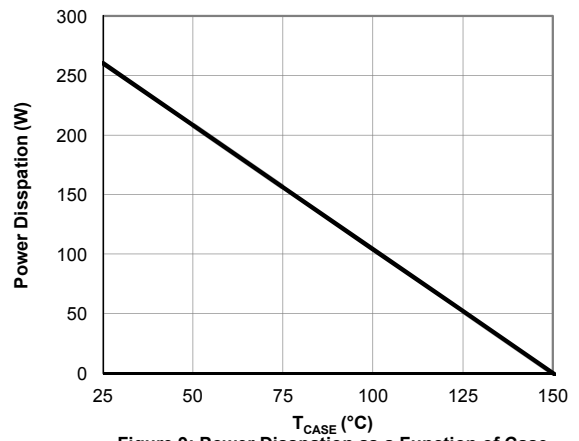


Figure 9: Power Dissipation as a Function of Case

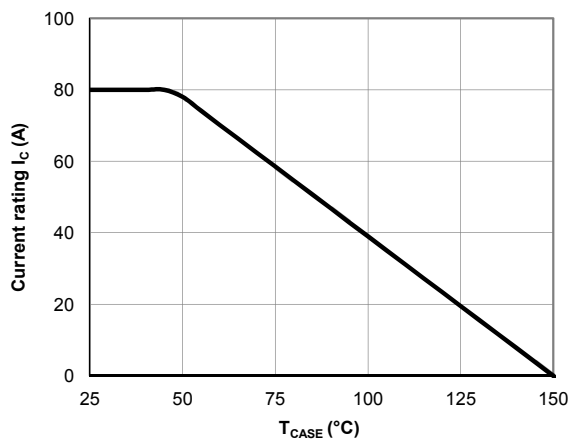


Figure 10: Current De-rating

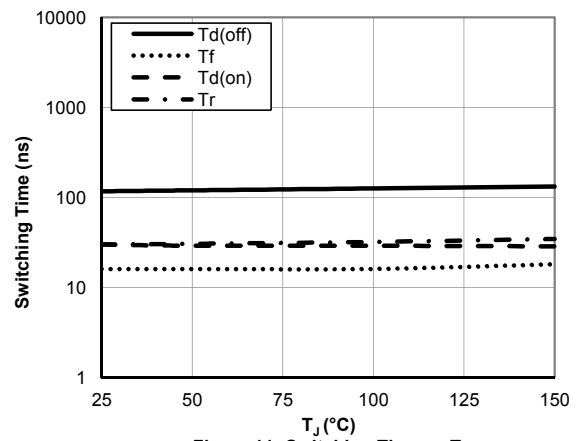


Figure 11: Switching Time vs. T_J
($V_{GE}=15\text{V}$, $V_{CE}=400\text{V}$, $I_C=40\text{A}$, $R_\theta=7.5\Omega$)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

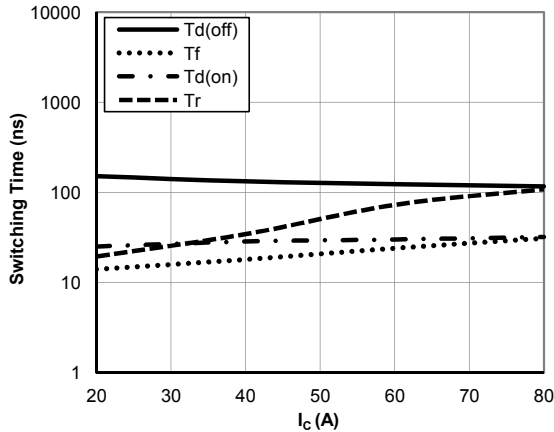


Figure 12: Switching Time vs. I_c
($T_j=150^\circ\text{C}$, $V_{GE}=15\text{V}$, $V_{CE}=400\text{V}$, $R_g=7.5\Omega$)

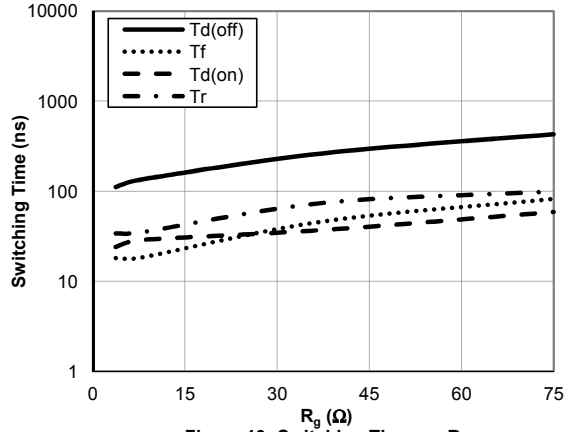


Figure 13: Switching Time vs. R_g
($T_j=150^\circ\text{C}$, $V_{GE}=15\text{V}$, $V_{CE}=400\text{V}$, $I_c=40\text{A}$)

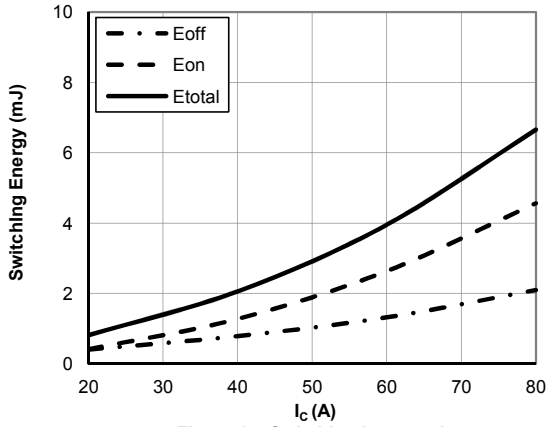


Figure 14: Switching Loss vs. I_c
($T_j=150^\circ\text{C}$, $V_{GE}=15\text{V}$, $V_{CE}=400\text{V}$, $R_g=7.5\Omega$)

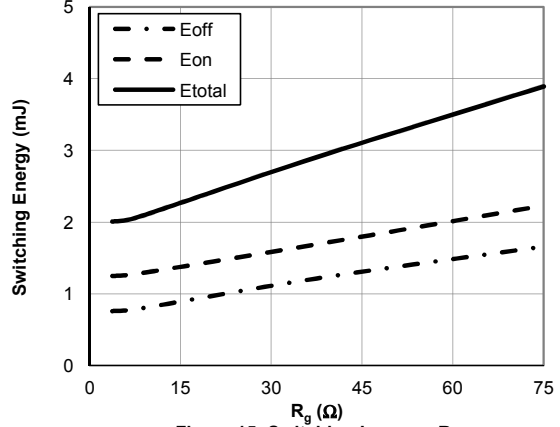


Figure 15: Switching Loss vs. R_g
($T_j=150^\circ\text{C}$, $V_{GE}=15\text{V}$, $V_{CE}=400\text{V}$, $I_c=40\text{A}$)

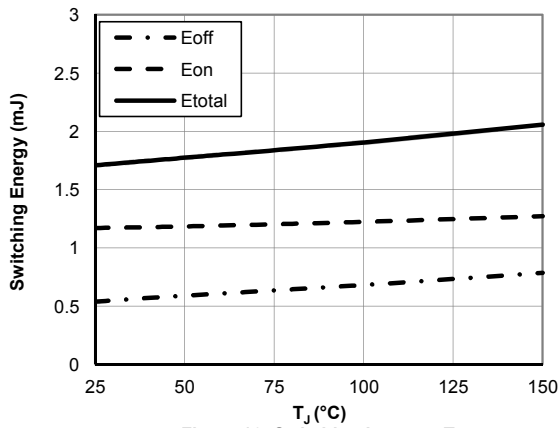


Figure 16: Switching Loss vs. T_j
($V_{GE}=15\text{V}$, $V_{CE}=400\text{V}$, $I_c=40\text{A}$, $R_g=7.5\Omega$)

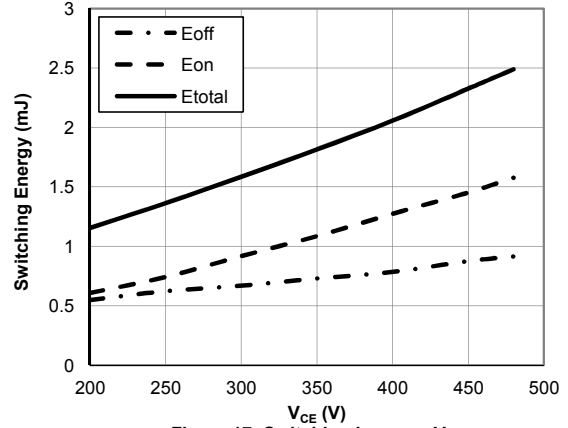


Figure 17: Switching Loss vs. V_{CE}
($T_j=150^\circ\text{C}$, $V_{GE}=15\text{V}$, $I_c=40\text{A}$, $R_g=7.5\Omega$)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

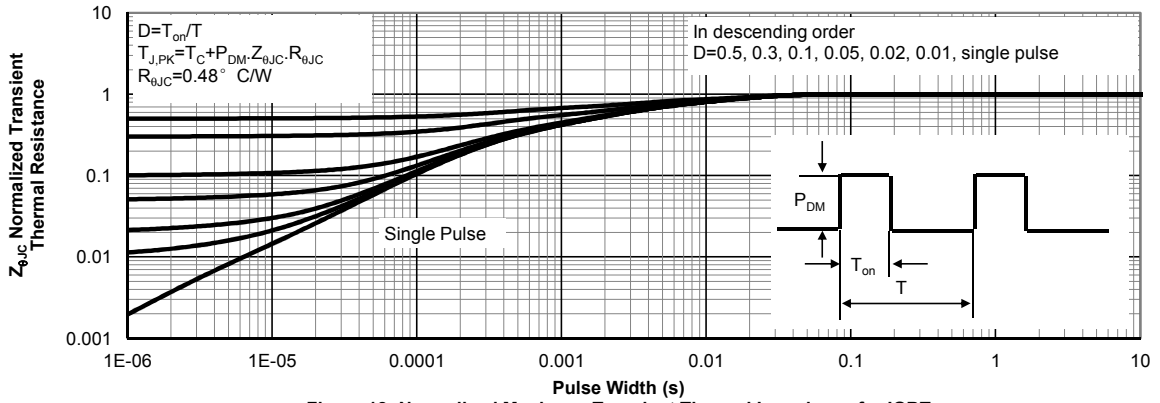


Figure 18: Normalized Maximum Transient Thermal Impedance for IGBT

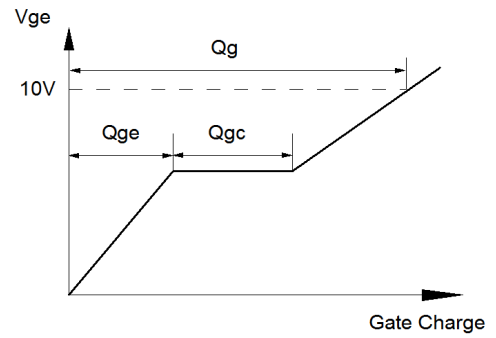
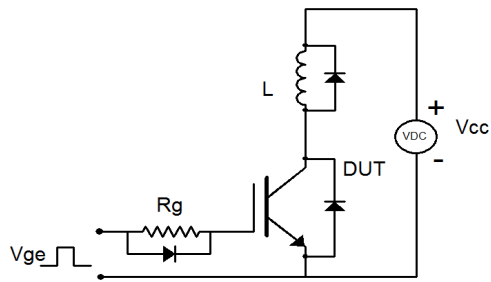


Figure A: Gate Charge Test Circuit & Waveforms

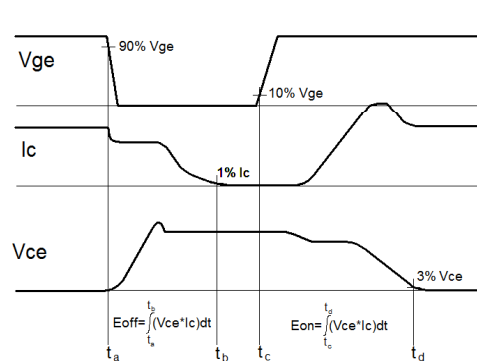
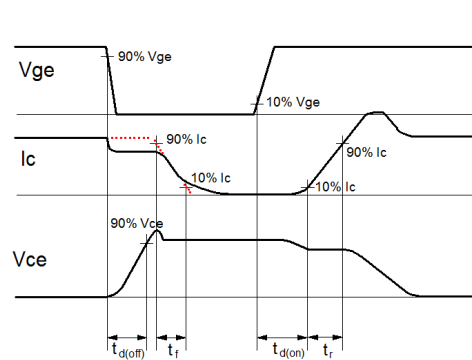
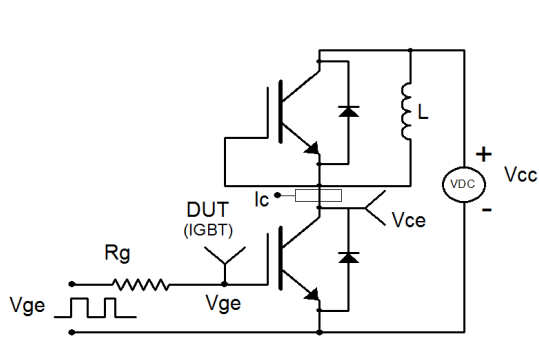


Figure B: Inductive Switching Test Circuit & Waveforms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IGBT Transistors category](#):

Click to view products by [Alpha & Omega manufacturer](#):

Other Similar products are found below :

[748152A](#) [APT20GT60BRDQ1G](#) [NGTB10N60FG](#) [IGP30N60H3XKSA1](#) [STGFW20V60DF](#) [APT30GP60BG](#) [APT45GR65B2DU30](#)
[GT50JR22\(STA1ES\)](#) [TIG058E8-TL-H](#) [VS-CPV364M4KPBF](#) [NGTB25N120FL2WAG](#) [NGTG40N120FL2WG](#) [RJH60F3DPQ-A0#T0](#)
[APT40GR120B2SCD10](#) [APT15GT120BRG](#) [APT20GT60BRG](#) [NGTB75N65FL2WAG](#) [NGTG15N120FL2WG](#) [APT70GR65B2DU40](#)
[NTE3320](#) [FGD3440G2-F085](#) [APT70GR120J](#) [APT35GP120JDQ2](#) [IKFW40N65ES5XKSA1](#) [IMBG120R220M1HXTMA1](#)
[IGW30N60H3FKSA1](#) [STGWA8M120DF3](#) [IGB30N60H3ATMA1](#) [IGW100N60H3FKSA1](#) [IGW75N60H3FKSA1](#) [HGTG40N60B3](#)
[IRGS4715DPBF](#) [FGH60N60SMD_F085](#) [FGH75T65UPD](#) [STGWA15H120F2](#) [IKA10N60TXKSA1](#) [IHW20N120R5XKSA1](#)
[IKW25N120T2FKSA1](#) [IHW20N65R5XKSA1](#) [IDW40E65D2FKSA1](#) [STGWT60H65FB](#) [STGWT60H65DFB](#) [STGWT40V60DF](#)
[STGWT20V60DF](#) [STGB10NB37LZT4](#) [FGH40T70SHD-F155](#) [FGD3245G2_F085](#) [NGTB40N65IHL2WG](#) [HGTG30N60C3D](#)
[HGTG30N60A4D](#)