60mm Active Length




Application

✓ IoT and Logistics, Industrial and many others.

Feature

✓ Slim and flexible

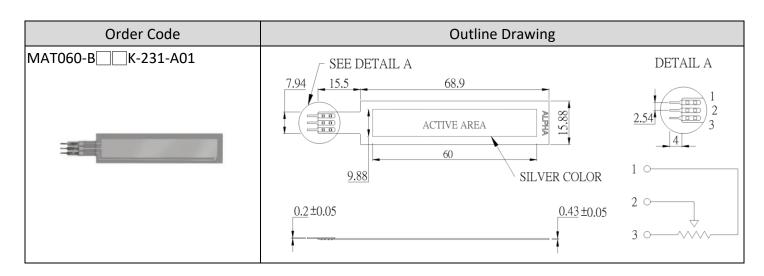

SPECIFICATION

MODEL	MAT060-B K-231-A01	
POSITION LINEARITY, INDEPENDENT	±3%	
RESISTANCE TOLERANCE	±20%	
ACTIVE LENGTH	60mm	
POWER RATING	1 Watt max. @25°C	
LIFE CYCLE(WITHOUT FAILURE)	>0.5 Million	
OPERATING TEMPERATURE	-20°C to +70°C	
IP RATING	IP65	
HUMIDITY	No affect @ 95% RH, 4hrs<50°C	

CONNECTOR OPTIONS

Female Contacts	Solder Tabs (pin)	Female Contact with Housing

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial Motion & Position Sensors category:

Click to view products by Alpha Taiwan manufacturer:

Other Similar products are found below :

595002M9474 01071901 D02318603 70U1N048S104U FE-41164 G8652 G8744 GA1T040F103UA GA1T100F502UA-A GA2E056P102UA GA2G140F252UA-A GA2T044S103UA-B GPS8627 GS2T032F253BA GS4P048F503UC GS4T040F503UC GS8367B GS8819 9811405 RDC1010A12 JA3G032P501UA-A KJ5-M18MB60-AZS 27M226 9810825 9870706 F07008036 SPSN048P202U F65118112 GA2G042F103UA GA2M028S102MC GA2M028S502RA GA2T056F502UA GH8810 25M921 GS8368B CM47070 CR121250 31M573 380000M8643 385500M9303 388037M6962 388281M9646 388517025480039 388580038670069 388818078120022 388860073800031 388C11M9548 388C24160090003 389504075810001 389767001230861