

CLASS.NO.	TITLE HEAD LIGHT SENSOR SPECIFICATION	
-----------	--	--

1. General

1-1 Scope

This specification applies to sliding type potentiometer with carbon composition resistor, used as a HEAD LIGHT LEVEL SENSOR for motor vehicle.

1-2 Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows:

Ambient temperature : 5 to 35°C

Relative humidity : 45 to 85%

Air pressure : 86 to 106kPa

If there is any doubt about the results, measurement shall be made within the following limits.

Ambient temperature : $20 \pm 2^\circ\text{C}$

Relative humidity : 60 to 70%

Air pressure : 86 to 106kPa

1-3 Operating temperature range : $-40 \pm 2^\circ\text{C}$ to $+105 + 5^\circ\text{C}$

1-4 Storage temperature range : $-40 \pm 2^\circ\text{C}$ to $+105 + 5^\circ\text{C}$

2. Appearance and Dimensions

2-1 Appearance

The potentiometer shall have no damage and not have any excessive rust, crack, split, poor plating and discolor in any portion.

2-2 Dimensions

The physical dimensions of the potentiometer shall be in accordance with the product drawing.

3. Electrical characteristics

No.	Item	Conditions		Specifications
3-1	Nominal total resistance and tolerance	Measurement shall be made by the resistance between terminal 1 and 3.		$3 \text{ k}\Omega \pm 20\%$
3-2	Rated voltage			D.C. $13.5 \text{ V} \pm 0.1\text{V}$
3-3	Operating voltage endurance			D.C. 9 to 18 V
3-4	Resistance taper	Point	Position	
		A and B	Point A and B refer to the product drawing	
		A'	9.1% from the A point.	$2.99 \pm 0.5 \text{ mm}$
		B'	6.07 mm from the A' point.	$85 \pm 2\%$
		A	Refer to the product drawing	2 % or less
		B	Refer to the product drawing	98 % or more
3-5	Linearity	The linearity shall be defined the percentage of variation on traveled between point <u>A'</u> and <u>B'</u> compared with the ideal straight line which is chained outputs at the point <u>A'</u> and <u>B'</u> on each product. Measurement speed : At 1mm/sec. Lever travel		$\pm 1\%$ (Output wave form See fig.1)

ALPS ELECTRIC CO., LTD.

SYMB.	DATE	APPD.	CHKD.	DSGD.	TITLE SPECIFICATIONS
.	.	.	.	APPD. DESIGN '06.5.-9 IKNOUE	CHKD. TAMADA
.	.	.	.	DSGD. DESIGN '06.5.-9 TAMADA	
.	.	.	.		DOCUMENT NO. 5RD712A009M (1/4)

CLASS.NO.	TITLE		
	HEAD LIGHT SENSOR SPECIFICATION		

No.	Item	Conditions	Specifications
3-6	Hysteresis	This item shall be measured by using of ALPS measurement equipment, because it is susceptible to measuring conditions. Measurement speed : At 1mm/sec. Lever travel	±1%
3-7	Insulation resistance	The voltage of 50 V D.C. shall be applied between individual terminals and case for 1 min.	100 MΩ or more
3-8	Dielectric strength	The voltage of 124 V A.C. shall be applied between individual terminals and case for 1 min.	Without damage to parts arcing or breakdown.
3-9	Overshoot resistance	The voltage of 32 V D.C. shall be applied between terminals 1 and 3 for 60 sec.	Without damage to parts arcing or breakdown.

4. Mechanical characteristics

Mechanical characteristics shall be in accordance with the document No. 5RD7001-300M attached.

5. Endurance characteristics

No.	Item	Conditions	Specifications
5-1	Specified characteristics after tests.	5-1-1 The measurement shall be made , after 20,000 actuating cycles.	Linearity : ± 1.5 % Hysteresis : ± 1.5 % Operating force : 2N MAX.
		5-1-2 The measurement shall be made , after 100,000 actuating cycles.	Linearity : ± 2 % Hysteresis : ± 2 % Operating force : 2N MAX. Total resistance is specified individually in each test
5-2	Endurance with load	The lever of potentiometer shall be sliding to 20,000 actuating cycles and 100,000 actuating cycles at a speed of 0.5~30 mm/s. with specified voltage loaded. (1 cycle is 1 go and return) Sliding of travel: Per 1 cycle with over 90 % sliding of travel range . The measurement shall be made with the process Below.	Total resistance : Nominal total resistance ±35% Except above items, refer to the 5-1-items
5-3	Cold	Temperature : - 40±2°C Time : 96±4 hours and stand in a room of normal temperature and humidity for 1 hour without load.	Total resistance : Nominal total resistance ±40 % Except above items, refer to the 5-1-items


ALPS ELECTRIC CO., LTD.

SYMB.	DATE	APPD.	CHKD.	DSGD.	TITLE	SPECIFICATIONS
.	.	.	.	APPD. DESIGN '06.5.-9 IKNOUE	CHKD. DESIGN '06.5.-9 TAMADA	DOCUMENT NO. 5RD712A009M (2/4)
.	.	.	.			
.	.	.	.			

CLASS.NO.		TITLE HEAD LIGHT SENSOR SPECIFICATION			
No.	Item	Conditions		Specifications	
5-4	Dry heat	Temperature : $+105 \pm 5^\circ\text{C}$ Time : 96 ± 4 hours and stand in a room of normal temperature and humidity for 1 hour without load.		Total resistance : Nominal total resistance $+25/-50\%$ Except above items, refer to the 5-1-1items	
5-5	Damp heat	Temperature : $+40 \pm 2^\circ\text{C}$ Humidity : 90 - 95%R.H Time : 96 ± 4 hours and stand in a room of normal temperature and humidity for 1 hour without load.		Total resistance : Nominal total resistance $+55/-25\%$ Except above items, refer to the 5-1-1items	
5-6	Change of temperature	Temperature : See fig.2. Cycle : 5 successive change of temperature Cycles, and stand in a room of normal temperature and humidity for 1 hour without load.		Total resistance : Nominal total resistance $\pm 40\%$ Except above items, refer to the 5-1-1items	
		Fig.2.			
		Step	Temperature		Duration
		1	$-40 \pm 2^\circ\text{C}$		30 Min
		2	Standard atmospheric conditions		10 to 15 Min
		3	$105 \pm 2^\circ\text{C}$		30 Min
		4	Standard atmospheric conditions		10 to 15 Min
5-7	Vibration	Frequency range : 10 to 55 Hz and return to 10Hz Amplitude : 1.5mm Sweep time : 1min Total time : 2h x 3directions		Total resistance : Nominal total resistance $\pm 25\%$ Except above items, refer to the 5-1-1 items	
5-8	Resistance to soldering heat	(1) Dip soldering Soldering temperature : 260°C or less Immersion time : 5sec. or less. Printed wiring board : Accordance with the product drawing. Material of the board : One-sided copper cladded phenolic board. Dimensions of component holes in the heat Shut (printed wiring board) shall be in accordance with those specified in the product drawing. (2) Manual soldering Bit temperature of soldering iron: 350°C or less. Application time of soldering : 3sec. or less.		Total resistance : Nominal total resistance $\pm 25\%$ Except above items, refer to the 5-1-1 items There shall be no deformation or cracks in molded part. No excessive abnormality in rotational feeling.	

..	ALPS ELECTRIC CO., LTD.	
..	APPD.	CHKD.
..	DESIGN '06.5.-9 TKNOUE	DSGD.
..	DESIGN '06.5.-9 TAMADA	TITLE SPECIFICATIONS DOCUMENT NO. 5RD712A009M
SYMB.	DATE	APPD.	CHKD.	DSGD.	(3/4)	

Fig.1

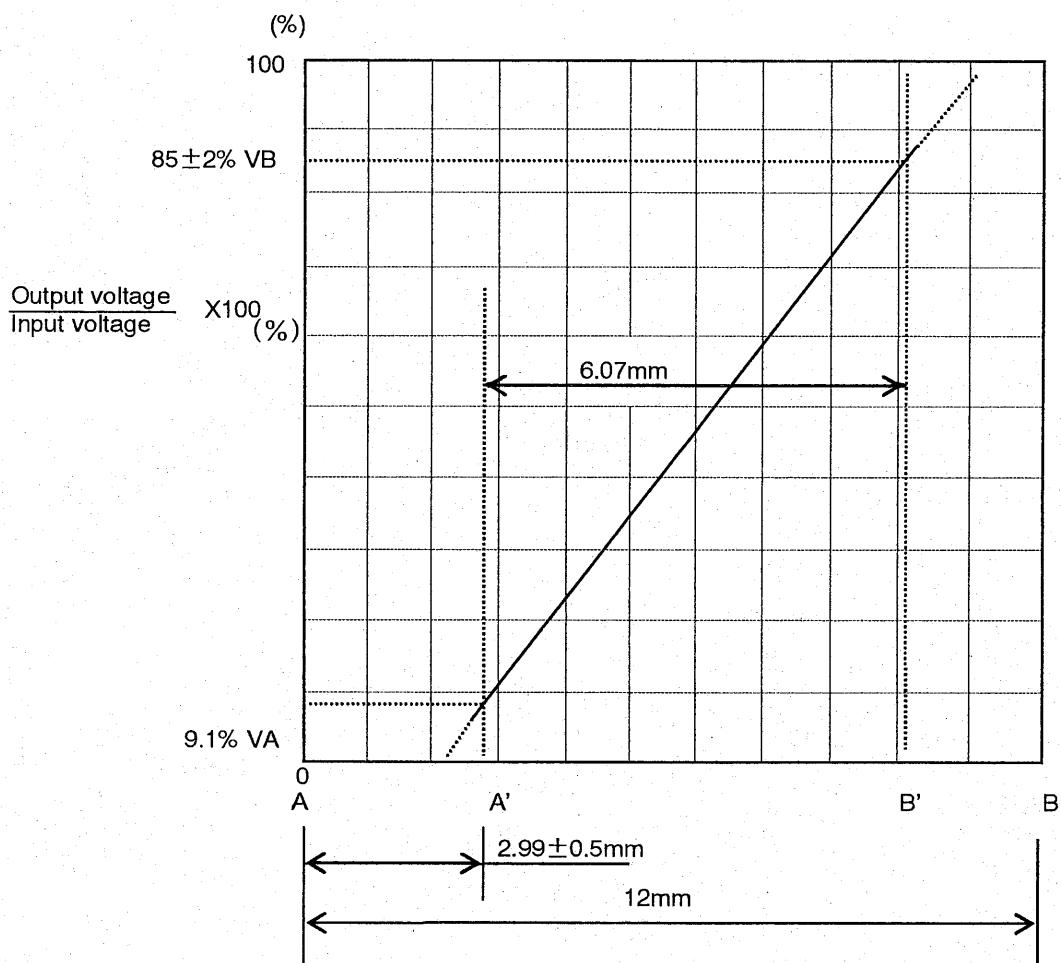Output wave formPoint A and B : Refer to the product drawing

..		ALPS ELECTRIC CO., LTD.		SPECIFICATIONS
..		APPD.	CHKD.	
..		DESIGN '06.5.-9 IKNOUE		DSGD.
..				TITLE
SYMB.	DATE	APPD.	CHKD.	DSGD.				DOCUMENT NO.
								5RD712A009M (4/4)

CLASS No.

Title

LINEAR SENSOR

機械的性能 Mechanical characteristics

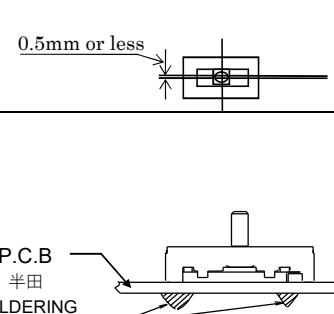
No.	項目 Item	条件および規格 Conditions or Specifications
1-1	メカストローク Lever travel	個別製品組立図による。 Accordance with the product drawing.
1-2	作動力 Operating force	2 N 以下 or less. 測定位置: レバー先端より1mmの位置 測定速度: 10mm / 秒 Operating position : 1 mm from the lever end. Traveling speed : 10 mm/s
1-3	レバーの移動止強度 Lever travel stop strength	しゅう動距離の両末端においてレバー先端より1mmの位置に10Nの静荷重を5秒間加え、著しいガタ、及び接触不良を生じないこと。 測定はプリント基板に半田付けし、プリント基板を固定した状態で行う。 但し、縦型形状の製品は、図1の様に製品上部も固定した状態で測定のこと。 A static load of 10 N shall be applied at the point 1 mm from lever end for both end in the direction of lever travel for 5 s, without excessive play or poor contact. The measurement conditions, see Fig.1
1-4	レバーの横押し強度 Side thrust of the lever	レバー先端から1mmの位置に、レバーの移動方向に対して直角方向に10Nの静荷重を5秒間加え、操作部、及び関連部品に変形、破損がないこと。 測定はプリント基板に半田付けし、プリント基板を固定した状態で行う。 但し、縦型形状の製品は、図1の様に製品上部も固定した状態で測定のこと。 A static load of 10 N shall be applied at the point 1 mm from lever end in a direction perpendicular to the axial direction for 5 s ,without deformation or breaks in the sliding part and contact part. The measurement conditions, see Fig.1
1-5	レバーの押し引き強度 Thrust and tensile lever	レバーの押し方向及び引張り方向に10Nの静荷重を5秒間加え、レバーのがた、破損、及びしゅう動ムラ等がなく、電気的性能を満足すること。 但し、縦型形状の製品は、図1の様に製品上部も固定した状態で測定のこと。 Thrust and tensile static load of 10 N shall be applied to the potentiometer in the lever direction for 5 s., without damage such as bad sliding and braking or play in the lever. And the electrical characteristics shall be satisfied. The measurement conditions, see Fig.1
1-6	レバーの横振れ Displacement of lever	0.5 mm p-p 以下 or less. レバー先端より3mmの位置に、2Nの静荷重を移動方向に対して直角方向に加え、測定する。 A static load of 2N shall be applied at the point 1 mm from lever end in a direction perpendicular to the axial direction and then the displacement shall be measured at the point 3mm from lever end.
1-7	レバーの傾き及びねじれ Lever inclination and torsion	θ は 2° 以下 θ shall be 2° or less. 
1-8	レバーのセンタスレ Distance from the center of the lever	片側 0.5 mm 以下 0.5mm or less on each end. After sliding lever as far as it will go in each direction, the distance from the center of the lever to the center of the case shall be measured at the both ends. 

図1
Fig.1**ALPSALPINE CO., LTD.**


ORIGINAL	'99-10-08	T.H	M.A	S.S	APPD.	CHKD.	DSGD.	TITLE 規格書 SPECIFICATIONS	
SYMB.	DATE	APPD.	CHKD.	DSGD.	Dec.03.2001 S.Abe	Dec.03.2001 S.Suda	Dec.03.2001 Y.Tamada	DOCUMENT No.	5RD7001-300M (1/1)

Confidential

(3) Height of Flux face
A level of the upper face of flux for reaching
the position at a half of the plate thickness
of printed board. (Fig. 1)
Further, no flow of flux invading on the
surface of printed board on the side of
installing sensor is allowed.

(4) Preheat condition
100°C max. within 1 minute
(Temperature on the side of installing printed
board is designated.)

(5) Soldering condition
Solder temperature: 260°C max.
Soldering period : within 5 seconds
Time of soldering : only one time is permitted

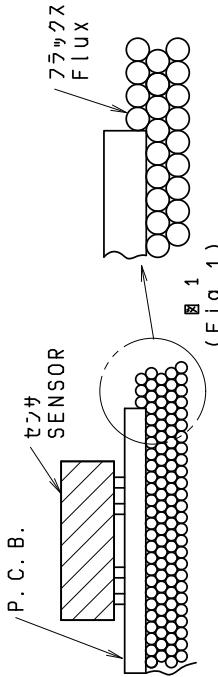

4. 手はんだ IN THE CASE OF MANUAL SOLDERING
手はんだ温度 350°C max. 間隔3秒以内ではんだ回数は1回までとする。
Solder temperature : 350°C max.
Soldering period : within 3 seconds
Time of soldering : only one time is permitted

(3) Height of Flux face
The size of the sensor depends upon the size of a printed
board, installing position of the sensor,
and the size of a solder bath etc.
Therefore, make sure, in advance, of no abnormal
state under the conditions of soldering to be
carried out at present.

(4) Please solder all inserted metal terminals and
bracket to a P.W.B.


(5) After soldering, please not to wash or clean
products by liquid such as solvent or any similar.

(6) Please thoroughly test and decide appropriate
parameters for soldering by your soldering
equipment under actual condition of production.

(For example, parameters for selective soldering
can be different from for wave soldering.)

(7) If you use spray fluxer equipment
please prevent the flux from entering the inside
of product from mounting side.

Fig. 2 センサ導入面
(Mounting side)

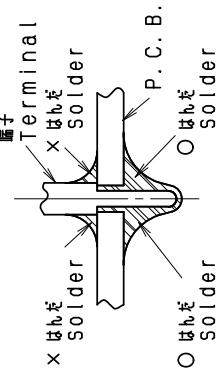

ALPSALPINE CO.,LTD.

ALPSALPINE CO.,LTD.			
APP'D.	CHK'D.	DSGD.	TITLE
C2#(G) 15-11-09	C2# 15-11-09	C2# 15-11-09	スライド・キーリューム仕様書 SPECIFICATIONS 1/2
SYMB.	DATE	APP'D	CHK'D
			DOCUMENT NO. 5RD7001-006
			SYMB. DATE APP'D CHK'D DSGD

ALPSALPINE CO.,LTD.			
APP'D.	CHK'D.	DSGD.	TITLE
C2#(G) 15-11-09	C2# 15-11-09	C2# 15-11-09	スライド・キーリューム仕様書 SPECIFICATIONS 2/2
SYMB.	DATE	APP'D	CHK'D
			DOCUMENT NO. 5RD7001-006
			SYMB. DATE APP'D CHK'D DSGD


Confidential

接続インピーダンスについて About impedance


本製品は、図1のように、その出力端子をマイコンのA/Dポートに直接接続して使うことを前提に製作されています。つまり、接続インピーダンスの値はメガオームオーダーを前提とし、センサ内部の接触抵抗をかなり高めに設定しています。

よって、図2のような回路でご使用になる場合は、接続インピーダンスが $1M\Omega$ 以下にならないように、ご配慮願います。

Since this sensor is designed to use with its output is connected directly to the A/D port, impedance is considered to be mega ohm level, then contact resistance in the sensor is higher. Please refer to fig-1. So when you use it in the circuit like fig-2, please make sure that Impedance should be over than $1M\Omega$.

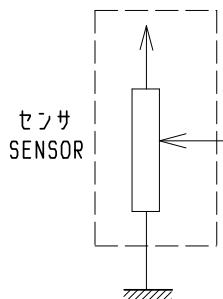

(図1)

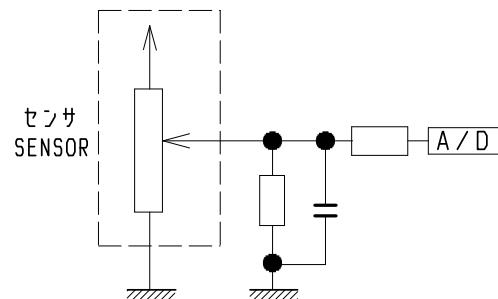

(図2)

					ALPSALPINE CO., LTD.			
					APPD.	CHKD.	DSGD.	TITLE
SYMB	DATE	APPD	CHKD	DSGD	M-2枝(G) '12-01-13 溝測	M-2枝 '12-01-13 佐々木(亨)	M-2枝 '12-01-13 清水	SPECIFICATIONS
								DOCUMENT NO. 5RD7001-004

Confidential

1. ご使用上の注意 Precautions in use

- 1) 当製品は密閉構造ではありませんので、使用環境によって外部ガスが製品内部に侵入し接点障害を起こす場合があります。同一セット内に以下の様な部材を使用しないで下さい。
 - ・硫化、酸化ガスを発生する部材(例:ゴム材,接着材,合板,潤滑剤,梱包材)
 - ・低分子シロキサンガスを発生する部材(例:シリコン系ゴム,潤滑剤,接着剤)

As this product does not have hermetical structure, it is possible gas from outside get inside of product and may cause contact failure depends on using environment. Please avoid using following materials. If you have to use any of material in parentheses, please pay special attention and confirm it does not influence to products through tests under actual using conditions.

 - materials which may generate sulfide gas or oxidized gas.
(rubber, glue, adhesive, plywood, packaging material)
 - materials which may generate low-molecular-weight siloxane gas.
(silicone base rubber, lubricant, glue)
- 2) 高湿度環境下、又は結露する環境下、液体が製品にかかる環境下では、端子間の電流リークが発生する恐れがありますのでご使用にならないで下さい。

Please not to use this product under the atmosphere with high humidity, with possibility of dew condensation or of direct splash of liquid. Because it may cause leak between terminals.
- 3) 使用温度範囲の上限、下限付近で長期間の連続使用はできません。

動作寿命の規定は常温15°C～35°C、常温25%～85%の環境条件に限ります。

使用温度範囲の上限、下限付近で長期間の連続動作を行う場合は、機種毎に仕様規定が可能かどうか確認が必要になります。

This product can't be continuously used under high operating temperature or low operating temperature specified in this document. Unless otherwise specified, the durability is specified only under normal conditions, temperature 15°C to 35°C and related humidity 25% to 85%.

When this product is operated at temperature near from upper or lower limit of operating temperature range, feasibility must be examined by each product specification.
- 4) 製品本体を規定の取付面まで挿入して水平になるように取付けて下さい。

水平にならないまま取付けますと、動作不良の要因となります。

Insert these products to the specified mounting surface and mount them horizontally.
If not mounted horizontally, these products will malfunction.
- 5) 塵埃が多い環境で使用されると塵埃が開口部から入り出力不良や動作不良の原因となることがありますのでセット設計時に予めご配慮ください。


If this product is used under dusty conditions, dust or debris may get inside of product from openings and possible to cause output failure or malfunction.

Please consider protections against dust when surrounding parts of the product are designed.

ALPSALPINE CO., LTD.

SYMB.	DATE	APPD.	CHKD.	DSGD.	APPD. Nov.10.2015 S.Urushihara	CHKD. Nov.10.2015 T.Sasaki	DSGD. Nov.10.2015 Y.Shimizu	TITLE ご使用上の注意 (GS) Precautions in use(GS) DOCUMENT No.
								C-6 (1/1)

Confidential

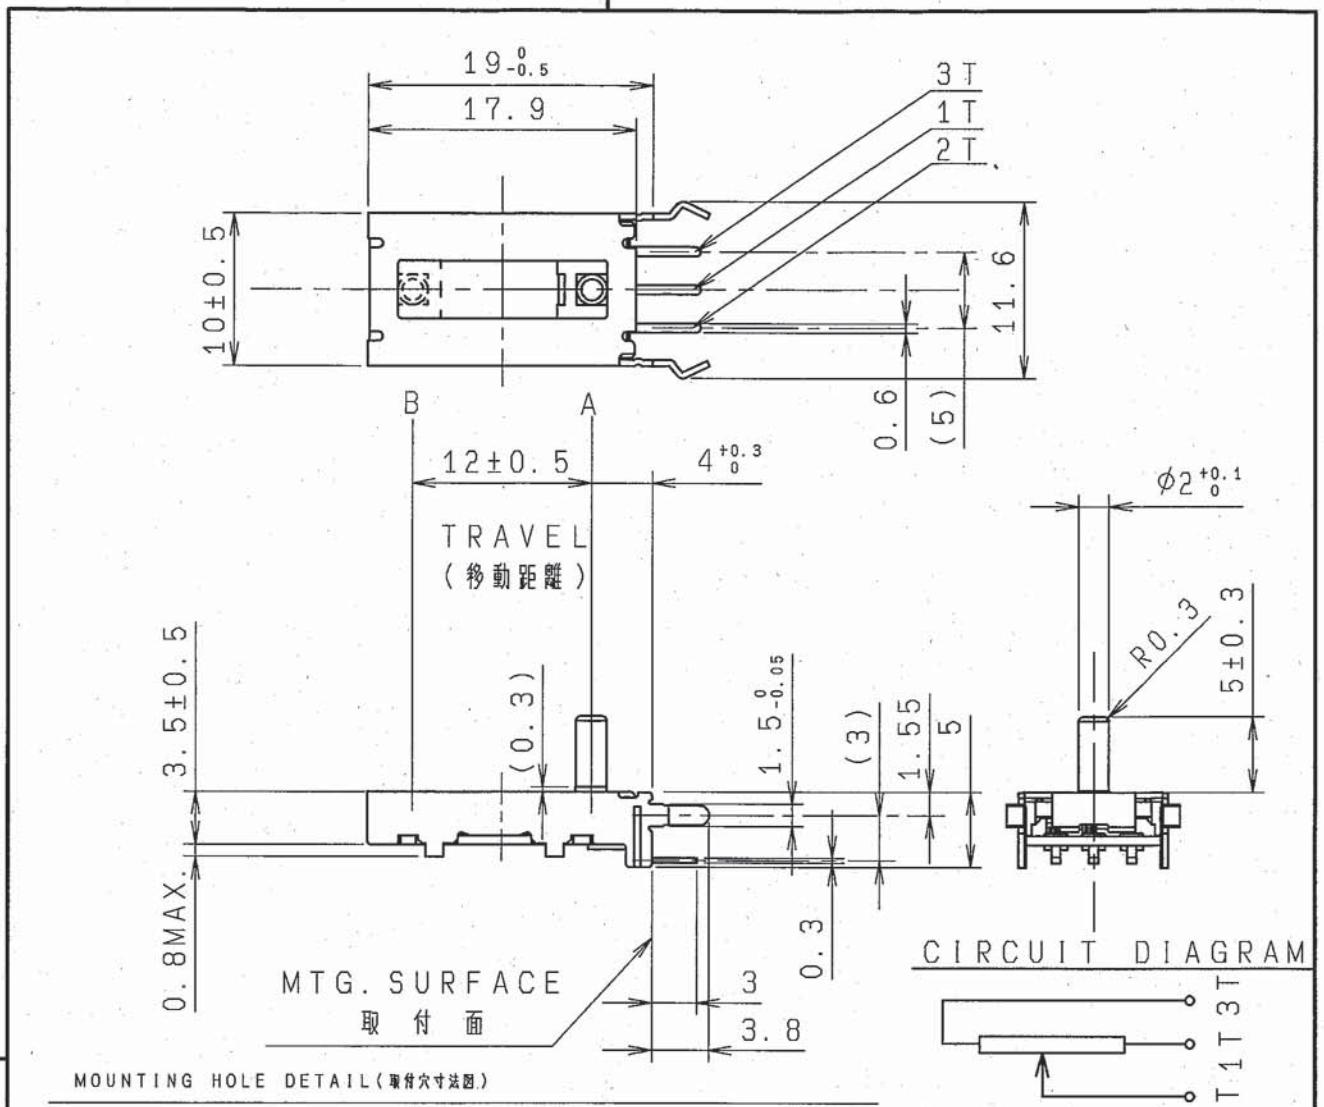

MOUNTING HOLE DETAIL (取付穴寸法図)


VIEWED FROM MOUNTING SIDE (挿入側より)

(RECOMMENDATION 推奨寸法)

DO NOT DESIGN PRINTED
WIRING ON THIS AREA.
パターン禁止範囲

DO NOT DESIGN HOLES EXCEPT
FOR MOUNTING HOLES ON THIS
AREA.

この範囲内に取付穴以外の穴を開けないこと。

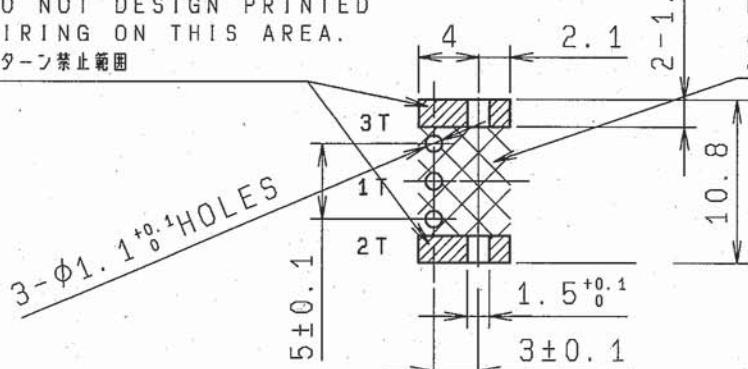

NOTE 1. SNAP PORTION IS DESIGNED BASED ON 1.6mm THICK P.C.B.

1. スナップ部はP.C.B.板厚1.6mm基準にて設計しております。

指定なき部分の許容差 TOLERANCES UNLESS OTHERWISE SPEC	
$L \leq 10$	± 0.3
$10 < L \leq 100$	± 0.5
$100 \leq L$	± 0.8
角度 ANGULAR DIMENSION	$\pm 5^\circ$

PART NO.	NAME	MATERIAL NAME / CODE	FINISH
			ALPS ALPS ELECTRIC CO., LTD.
		DSGD. 1-2G-786083 Y. TAMADA Mar. 05' 04	SCALE 2 : 1 NO. _____
		CHKD. S. SUDA Mar. 05' 04	TITLE HEAD LIGHT SENSOR VERTICAL TYPE
		APPD. M. ASANO Mar. 05' 04	UNIT mm DOCUMENT NO. RD712A029 2004.6.2
SYMB	DATE	APPD CHKD DSGD	

OR

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Board Mount Motion & Position Sensors category:

Click to view products by ALPS manufacturer:

Other Similar products are found below :

[6SS4](#) [F02008062](#) [9970-090-9J-SA](#) [IPS2200BI1R](#) [NJL5820R-TE4](#) [AS5270B-HMFM](#) [IPS2200BI1W](#) [G-MRCO-057](#) [MB060-N-221-A02](#)
[MB090-N-221-A02](#) [USEQMSKL221600](#) [EVW-ADF001B14](#) [MLX90316KDC-BDG-100-RE](#) [AMN33111J](#) [ZSBG446671](#) [MTS-360-1A-](#)
[C0000-ERA360-05E](#) [AMN11111](#) [AMN24112](#) [AMN31111](#) [AMN31112](#) [AMN34112](#) [AMN34111](#) [EKMB1303111K](#) [EKMB1293112](#)
[ZSBG323671](#) [RBS130100](#) [RBS130200](#) [EKMC1605111](#) [EKMB1104111](#) [EKMB1305111K](#) [EKMC1604112](#) [EKMB1305112K](#)
[EKMB1205111](#) [EKMB1205112](#) [EKMB1304113K](#) [EKMB1104113](#) [EKMB1105111](#) [EKMC1604111](#) [EKMB1105112](#) [EKMB1305113K](#)
[EKMB1204113](#) [EKMB1105113](#) [EKMB1205113](#) [EKMB1304112K](#) [EKMB1304111K](#) [EKMC1606111](#) [G-MRCO-052](#) [OKY3062-2](#)
[OKY3062-4](#) [OKY3062-5](#)