


ELECTRICAL		Single shaft (R1)								
1. Total resistance:		10 kΩ ± 20%								
2. Rated power:		0.05W								
3. Rated voltage:		Please refer to the attached.								
4. Resistance taper:		Please refer to the attached.								
5. Tap position:		_____								
6. Tap resistance between terminals:		_____								
7. Residual resistance between terminals:		1&2, 2&3 : 20Ω max.								
8. Sliding noise : (Measured by JIS C 6443)		Less than 100mV								
9. Insulation resistance :		More than 100 MΩ at 250V D. C.								
10. Withstand voltage:		300V A. C. for 1 minute.								
11. Gang error :		_____								
12. switch rating:(Resistor load)		3A 16V D. C. (min:10mA)								
13. Switch contact resistance: (Measured by the 1A 5V D.C. voltage drop method.)		Initial value :100mΩ max. After 10,000 cycles:200mΩ max.								
14. Circuit:		_____								
MECHANICAL										
1. Total rotational angle :		300 ⁺¹⁰ ₋₅ °								
2. Rotational torque: (Rotational speed 60°/sec.)		2~25mN·m.								
3. Stopper strength :		No damage with an application of 0.5N·m min.								
4. Resistance to soldering heat :		Please refer to the attached.								
5. Bushing nut tightening strength :		Tightening torque to be no greater than 1N·m. *Pay attention otherwise the strength may not be assured.								
6. Push / pull strength :		No damages with an application of Push or pull force 100N for 10 sec.								
7. Shaft wobble :(Apply the moment of 50mN·m at the point of 30mm from mounting surface)		0.7 XL/30mm p-p max. (L:Shaft length) (If the shaft length is less than 30mm, the value shall be calculated proportionally.)								
8. Operation force of shaft:		_____								
9. Click position :		_____								
10. Click torque:		_____								
11. Rotation play at the click position:		_____								
12. Contact arrangement :		S. P. D. T. (PUSH ON·PUSH OFF)								
13. Switching stroke :		1.5±0.5mm								
14. Switch operation force :		12±8N								
ENDURANCE										
1. Rotational life :		More than 15,000 cycles.								
2. Switching life :		More than 10,000 cycles.								
NOTES										
1. The items except above mentioned items shall meet or exceed JIS C 6443.										
2. This type is protected against sulfides.										
3. Operating temperature range : -20°C to +70°C										
4. Storage temperature range : -40°C to +85°C										
ALPSALPINE CO.,LTD.		TITLE					APPD. May. 05. '94 R. Arasawa	CHKD. May. 05. '94 M. Endo	DSGD. May. 05. '94 T. Yamaguti	No. V R 0 0 0 0 0 1 4
		SPECIFICATIONS	SYMB	DATE	APPD	CHKD	DSGD			



ALPSALPINE CO.,LTD.

Rated voltage :

The rated voltage shall be the voltage of D.C. or A.C. (commercial frequency, effective value) corresponding to the rated power (dissipation), and be obtained from the following formula. When the obtained rated voltage exceeds the maximum working voltage given in the following, however, the maximum working voltage of the following shall be the rated voltage.

$$E = \sqrt{P \cdot R} \text{ (V)}$$

Where E : Rated voltage (V)
 P : Rated power (dissipation) (w)
 R : Nominal total resistance (Ω)

Maximum working voltage : 50 V A.C. , 30 V D.C.

Resistance to soldering heat

There shall be no evidence of poor contact between resistance element and terminals, or any physical damages as a result of soldering.


•Dip soldering

- Condition of soldering :
Soldering shall be certified with following condition.
- Substrate to be soldered :
Copper clad laminated phenol board in one surface of 1.6 mm thickness.
- Solder flux :
Flux of 0.82 specific weight in bubbling type solder fluxcoating apparatus shall be used and bubbling surface height shall be defined substantially as half thickness of substrate.
- Flux shall not flow up on substrate surface.
- Preheating :
Surface temperature of substrate shall be settled within 100°C in 2 minutes.
- Dip soldering :
To be performed in 260±5°C , 5±1 sec.

Please use the above process only 1 or 2 times.

•Manual soldering

To be performed in 3 seconds within 350°C.

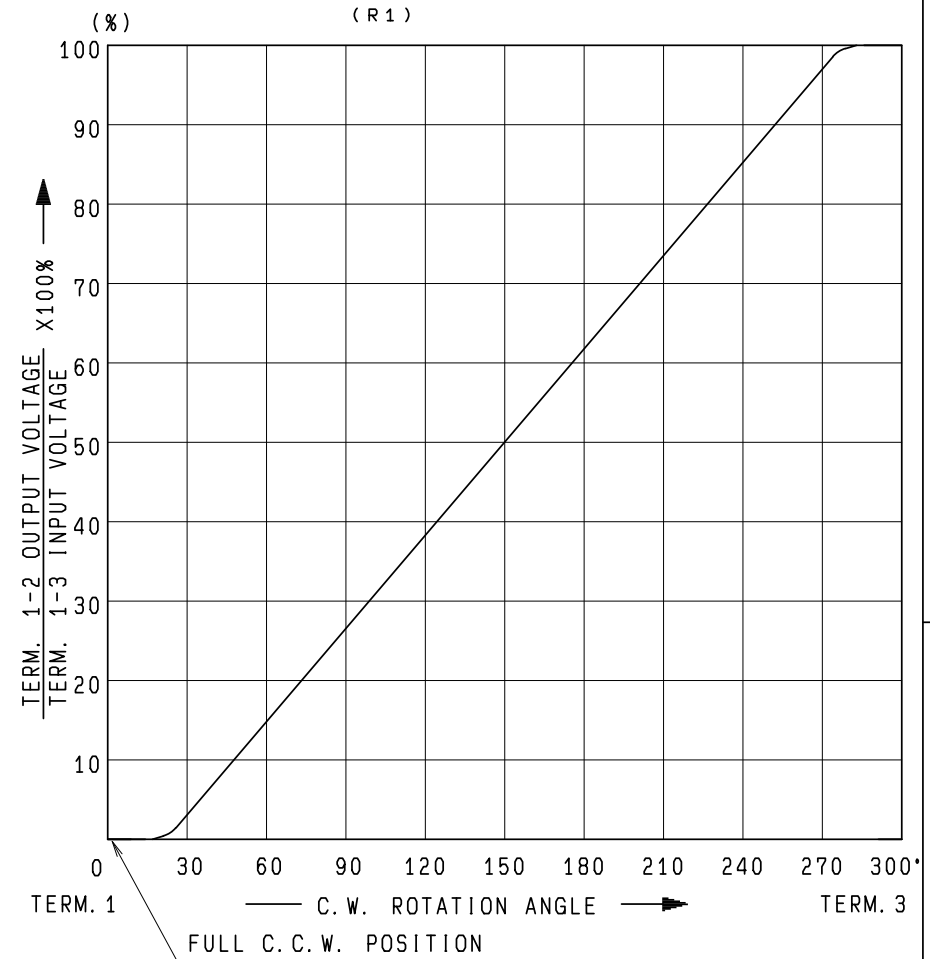

AT150° C.W. SHAFT ROTATION FROM FULL C.C.W. POSITION VOLTAGE PERCENT SHALL FALL WITHIN THE LIMITS OF 40-60 PERCENT.

SYMB	DATE	APPD	CHKD	DSGD	APPD.	CHKD.	DSGD.	NAME
					May. 23, '94	May. 23, '94	May. 23, '94	R. Arasawa M. Endo T. Yamaguti
					DOCUMENT NO.			


Confidential

SYMB	DATE	APPD	CHKD	DSGD	APPD.	CHKD.	DSGD.	NAME	K09-B01
					May. 23, '94	May. 23, '94	May. 23, '94	R. Arasawa M. Endo T. Yamaguti	
					DOCUMENT NO.				VR00000014



Confidential

記号	年月日	承認	照査	設計	図名	規格	処	埋
△1	62.11.12	山下	山口	阿部	9形1軸等速 PUSH-SW付V組立図	5R2412		
承認	W設2 01.2.26	照査	W設2 61.2.26	設計	W設2 61.2.24			
三角法	単位	材	料	規	格	処	埋	
	mm							


NOTES
 BUSHING MATERIAL — ZINC ALLOY DIE CASTING
 SHAFT MATERIAL — ALUMINUM

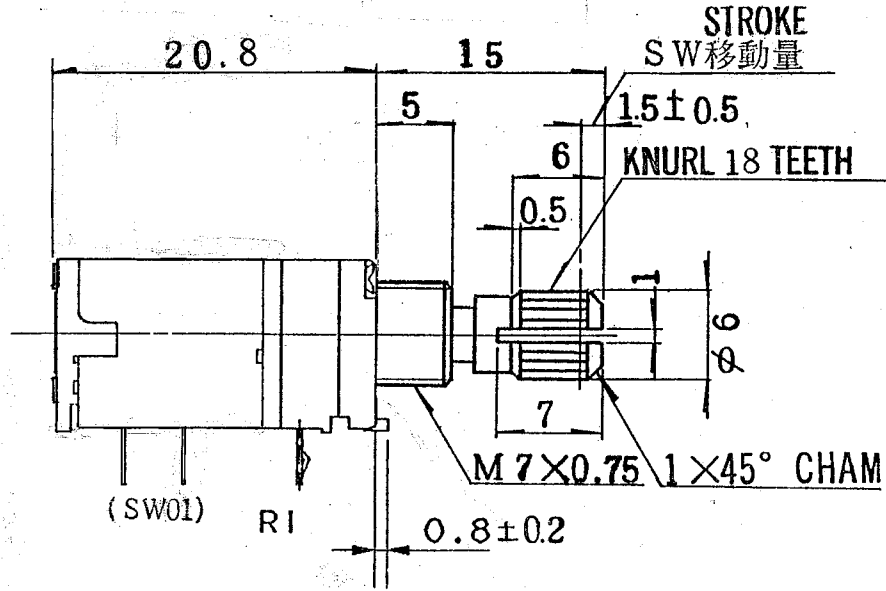


スリ割角度は任意とする。
 SHAFT SLOT IS OPTIONAL ANGLE

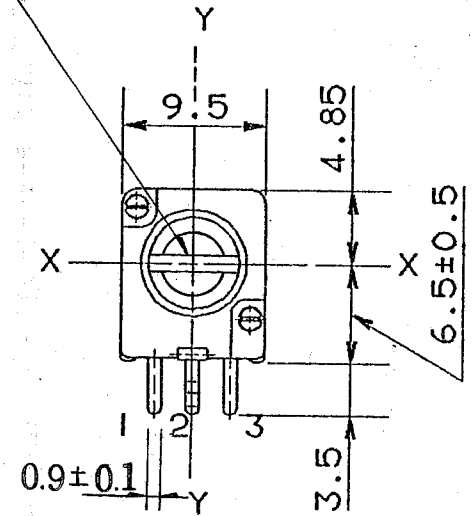

取付穴寸法図 P.W.B. MOUNTING DETAIL TOLERANCE ±0.1 許容差 ±0.1 VIEWED FROM MOUNTING SIDE (挿入側より)

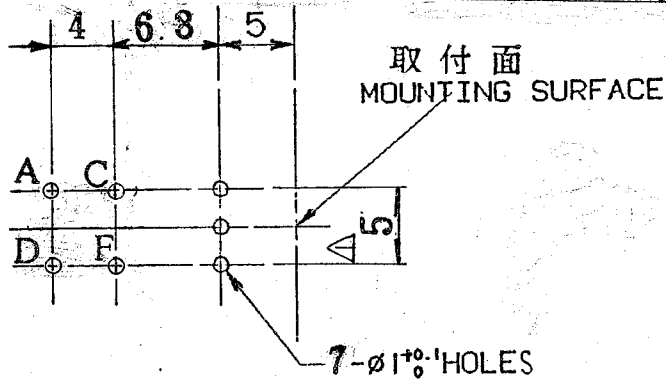

シャ-シ止メ詳細図
 LOCATING LUG DETAIL



許容差の指定なき寸法の公差		
TOLERANCES UNLESS OTHERWISE SPEC		
BASIC DIMENSIONS	TOLERANCE	
L ≤ 10	±0.3	
10 < L < 100	±0.5	
100 ≤ L	±0.8	
角度	ANGULAR DIMENSION ±5°	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Potentiometers](#) category:

Click to view products by [ALPS](#) manufacturer:

Other Similar products are found below :

[58C2-2](#) [590SX1N32F103SS](#) [591SXJ48S252SC](#) [591SXP56S252SC](#) [591SXP56S503SC](#) [D31409](#) [70B1G048K502X-A](#) [70B1M032S502W](#)
[70B1N056S202W](#) [70B8N056F502W](#) [70J8N048S104U](#) [70L1N040P103W](#) [70L1N048P103X](#) [70L1N048S103W](#) [GA2L040S102UC](#)
[GA2L040S103UC](#) [GS1G044P103UA](#) [GS1N048P103UA](#) [GS1T032S103UA](#) [A43-1500](#) [A43-20K](#) [A47-200K](#) [A4720K](#) [132-2-0-202](#) [132-0-0-202](#) [RK14K1220-F25-C0-A103](#) [RK14K1220F25C0C104](#) [RK14K1220-F25-C1-B103](#) [14910FAGJSX10102KA](#) [14910FBGLFY00103KA](#)
[14910AABHSX10103KA](#) [14910FAGJSX10104KA](#) [152-01031](#) [C0342008 5K](#) [J97589](#) [23M728](#) [248BBHS0XB25104MA](#)
[248BBHS0XB25503MA](#) [249FGJS0XB25503KA](#) [RV170F-10-15R1-B500K-0021](#) [917523A](#) [A43-40](#) [A43-750](#) [A43S-5](#) [A47-15K](#) [A47-1K](#)
[A4750K](#) [SPPG048S103U](#) [SPPG056P103U](#) [SWE-10](#)