

## UR-Series - UL1077 Recognized Supplementary Protector - 2 pole C-Trip



Two Pole



Standard Pack: 6

Weight:

0.3A - 32A



1.75kg (3.86 lb.)

40A - 63A


2.07kg (4.56 lb.)

| Rated Current | Type/ Cat. No. | Rated Voltage |
|---------------|----------------|---------------|
| 0.5A          | 2C05UR         | 480Y/277V AC  |
| 1.0A          | 2C1UR          | 480Y/277V AC  |
| 2.0A          | 2C2UR          | 480Y/277V AC  |
| 3.0A          | 2C3UR          | 480Y/277V AC  |
| 4.0A          | 2C4UR          | 480Y/277V AC  |
| 5.0A          | 2C5UR          | 480Y/277V AC  |
| 6.0A          | 2C6UR          | 480Y/277V AC  |
| 8.0A          | 2C8UR          | 480Y/277V AC  |
| 10A           | 2C10UR         | 480Y/277V AC  |
| 12A           | 2C12UR         | 480Y/277V AC  |
| 13A           | 2C13UR         | 480Y/277V AC  |
| 15A           | 2C15UR         | 480Y/277V AC  |
| 16A           | 2C16UR         | 480Y/277V AC  |
| 20A           | 2C20UR         | 480Y/277V AC  |
| 25A           | 2C25UR         | 480Y/277V AC  |
| 30A           | 2C30UR         | 480Y/277V AC  |
| 32A           | 2C32UR         | 480Y/277V AC  |
| 40A           | 2C40UR         | 480Y/277V AC  |
| 50A           | 2C50UR         | 480Y/277V AC  |
| 60A           | 2C60UR         | 480Y/277V AC  |
| 63A*          | 2C63UR         | 480Y/277V AC  |

\*63A is not UL Recognized.

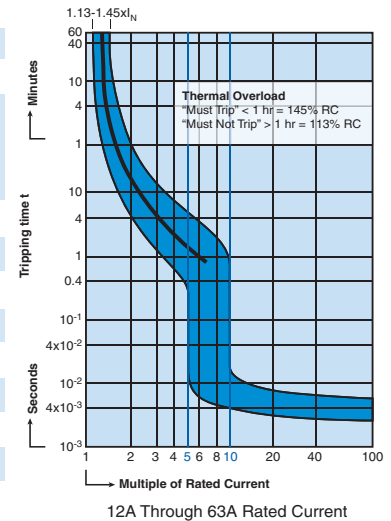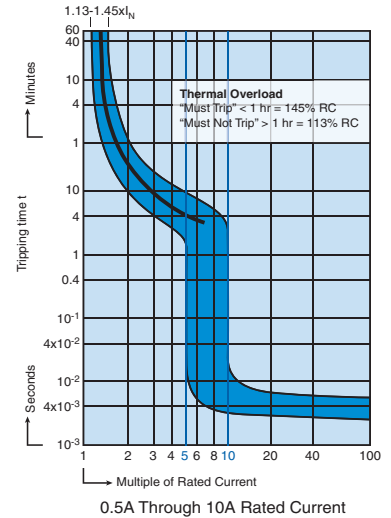

| UR - Series                            |   |
|--|---|
| <b>Voltage Rating</b>                  | 0.5-60A / 480Y/277V AC  |
| <b>Short Circuit Withstand Rating</b>  | 0.5 - 10A (RC): 10 kA with no back-up fuse<br>8 - 63A (RC): 10 kA with UL-listed Class J back-up fuse;<br>5 kA with no back-up fuse |
| <b>Calibration Temperature</b>         | 30°C (86°F)   |
| <b>Ambient Temperature</b>             | -25°C to +55°C (-13°F to 131°F)   |
| <b>Storage Temperature</b>             | -40°C to +70°C (-40°F to 158°F)   |
| <b>Terminal Torque (min/max)</b>       | 2 Nm (17.7 lb.in.) / 2.5Nm (22.2 lb.in.)  |
| <b>Electrical Life</b>                 | 6000 switching cycles ON/ OFF   |
| <b>Mechanical Life</b>                 | 10000 switching cycles ON/ OFF  |
| <b>Vibration Resistance</b>            | > 15g according to DIN EN 60069-2-59 during a load with 1.05 x I <sub>N</sub>   |
| <b>Resistance to mechanical shocks</b> | 25g @ 11ms  |

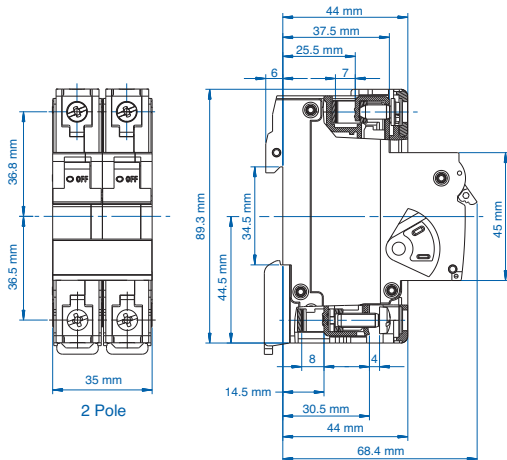

### "C" Magnetic Trip Parameters

Rated current 0.5A to 63A.

1. Hold for a minimum of 100ms at surge of 5 times rated current.
2. Trip in under 100ms at 10 times rated current.

### Short Circuit Withstand Ratings for R-Series Supplementary Protector

| Trip Curve | Amp Range | Backup Protection                 |                                |
|------------|-----------|-----------------------------------|--------------------------------|
|            |           | UL-Listed Class J Fuse up to 10kA | No Backup Fuse Required up to: |
| All        | 0.5 - 10A | 70A                               | 10kA                           |
| All        | 12 - 60A  | 4xRC*                             | 5kA                            |

\*up to nearest rated current

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Breakers](#) category:*

*Click to view products by [Altech](#) manufacturer:*

Other Similar products are found below :

[0185080.X](#) [0185100.XP](#) [0185150.XP](#) [0700005](#) [0700007](#) [0700010](#) [0700015](#) [0700020](#) [0700025](#) [0700030](#) [0700040](#) [0712107](#) [0712123](#)  
[0712152](#) [0712194](#) [0712217](#) [0712233](#) [0712259](#) [0712275](#) [0712291](#) [0712314](#) [0900100](#) [0900113](#) [0900126](#) [0900207](#) [0900210](#) [0900317](#)  
[0900333](#) [0900414](#) [0900618](#) [0900634](#) [0900812](#) [0901002](#) [0902030](#) [0902056](#) [0902072](#) [0902098](#) [0902108](#) [0902111](#) [0902124](#) [0902137](#)  
[0902218](#) [0902221](#) [0902247](#) [0902263](#) [0902328](#) [0902331](#) [0902344](#) [0902409](#) [0902412](#)