

Cable Gland *Industrial Multi-Conductor (PG) - Polyamide*

Material:

- Body: Polyamide PA 6
25 % Glass-fiber Reinforced
- Seal: Tefabloc

Characteristics:


- PG thread
- Multi-holed seal inserts

Technical properties:

- Gas tight and watertight
- Completely twist protected
- Combinable with various sealing inserts

Applications:

- Machines and devices
- Measuring and control engineering
- Plant installations

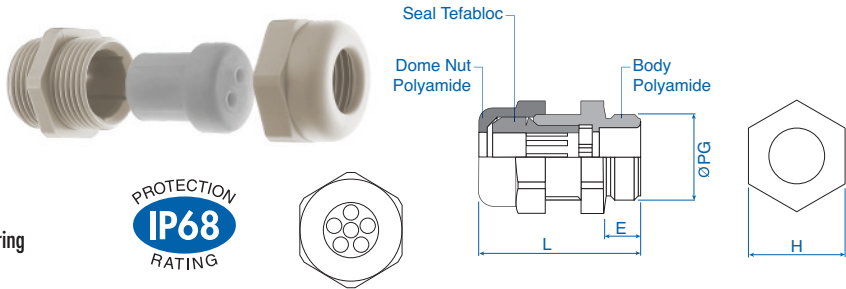

Temperature Range
-30 to 120°C (-22 to 248°F)

Outer thread	Hole Quantity	Hole diameter mm	H mm	E mm	L mm	Cat. No. Light Grey	Cat. No. Black	Std. Pk.	Outer thread	Hole Quantity	Hole diameter mm	H mm	E mm	L mm	Cat. No. Light Grey	Cat. No. Black	Std. Pk.
PG 7	1	4	15	8	31	5315800	5315600	50	PG 16	4	4	27	10	40	5315862	5315662	50
PG 7	1	5	15	8	31	5315801	5315601	50	PG 16	4	5	33	10	42	5315863	5315663	50
PG 9	1	5	19	8	32	5315810	5315610	50	PG 16	4	6	33	10	42	5315864	5315664	50
PG 9	2	1	19	8	32	5315811	5315611	50	PG 16	5	4	27	10	40	5315865	5315665	50
PG 9	2	3	19	8	32	5315812	5315612	50	PG 16	5	5	27	10	40	5315866	5315666	50
PG 9	2	3.5	19	8	32	5315813	5315613	50	PG 16	6	4	27	10	40	5315867	5315667	50
PG 9	2	4	19	8	32	5315814	5315614	50	PG 16	7	4	33	10	42	5315868	5315668	50
PG 9	3	3	19	8	32	5315815	5315615	50	PG 21	2	4.5	33	11	44	5315869	5315669	20
PG 9	4	3	22	8	34	5315816	5315616	50	PG 21	2	8	33	11	44	5315870	5315670	20
PG 9	4	4	22	8	34	5315817	5315617	50	PG 21	2	8.7	42	11	48	5315871	5315671	20
PG 11	2	2.3	24	8	35	5315820	5315620	50	PG 21	2	9	42	11	48	5315872	5315672	20
PG 11	2	3	24	8	35	5315821	5315621	50	PG 21	2	11	42	11	48	5315873	5315673	20
PG 11	2	3.5	24	8	35	5315110	5315500	50	PG 21	3	7	33	11	44	5315210	5315520	20
PG 11	2	4	24	8	35	5315822	5315622	50	PG 21	3	8	33	11	44	5315211	5315521	20
PG 11	2	5	24	8	35	5315111	5315501	50	PG 21	3	9	42	11	48	5315874	5315674	20
PG 11	2	6	27	8	38	5315112	5315502	50	PG 21	4	5	33	11	44	5315875	5315675	20
PG 11	3	3	24	8	35	5315823	5315623	50	PG 21	4	6	33	11	44	5315212	5315522	20
PG 11	3	3.5	24	8	35	5315113	5315503	50	PG 21	4	7.5	42	11	48	5315876	5315676	20
PG 11	3	4	24	8	35	5315824	5315624	50	PG 21	4	8	42	11	48	5315213	5315523	20
PG 11	3	5	27	8	38	5315114	5315504	50	PG 21	5	5	33	11	44	5315877	5315677	20
PG 11	3	5.3	24	8	36	5315825	5315625	50	PG 21	5	6	33	11	44	5315214	5315524	20
PG 11	4	1.5	24	8	35	5315826	5315626	50	PG 21	5	6.5	33	11	44	5315215	5315525	20
PG 11	4	3.5	24	8	35	5315827	5315627	50	PG 21	6	4	42	11	48	5315878	5315678	20
PG 11	6	2	24	8	35	5315828	5315628	50	PG 21	6	5	33	11	44	5315879	5315679	20
PG 11	6	2.5	24	8	35	5315829	5315629	50	PG 21	6	6	42	11	48	5315216	5315526	20
PG 13.5	2	3	24	9	36	5315830	5315630	50	PG 21	6	6.5	42	11	48	5315217	5315527	20
PG 13.5	2	5	24	9	36	5315831	5315631	50	PG 21	6	7	42	11	48	5315218	5315528	20
PG 13.5	2	6	24	9	36	5315130	5315510	50	PG 21	7	6	42	11	48	5315219	5315529	20
PG 13.5	3	2	24	9	36	5315832	5315632	50	PG 21	8	4	33	11	44	5315880	5315680	20
PG 13.5	3	3	24	9	36	5315833	5315633	50	PG 21	8	5	33	11	44	5315220	5315530	20
PG 13.5	3	4	24	9	36	5315834	5315634	50	PG 21	11	5	42	11	48	5315221	5315531	20
PG 13.5	3	5.3	24	9	36	5315835	5315635	50	PG 21	21	2	33	11	44	5315881	5315681	20
PG 13.5	3	6	27	9	38	5315836	5315636	50	PG 21	28	3	42	11	48	5315222	5315532	20
PG 13.5	4	3	24	9	36	5315837	5315637	50	PG 29	2	9	42	12	48	5315289	5315690	20
PG 13.5	4	4	24	9	36	5315838	5315638	50	PG 29	2	11	42	12	48	5315891	5315691	20
PG 13.5	4	5	27	9	38	5315839	5315639	50	PG 29	2	12	42	12	48	5315892	5315692	20
PG 13.5	4	5.3	27	9	38	5315840	5315640	50	PG 29	3	9	42	12	48	5315893	5315693	20
PG 13.5	6	3.5	24	9	36	5315841	5315641	50	PG 29	3	11	42	12	48	5315894	5315694	20
PG 13.5	10	2	24	9	36	5315842	5315642	50	PG 29	4	8	42	12	48	5315290	5315540	20
PG 16	2	4	27	10	40	5315850	5315650	50	PG 29	4	9	42	12	48	5315895	5315695	20
PG 16	2	5	27	10	40	5315851	5315651	50	PG 29	4	10	42	12	48	5315896	5315696	20
PG 16	2	6	27	10	40	5315852	5315652	50	PG 29	6	6	42	12	48	5315897	5315697	20
PG 16	2	7	27	10	40	5315160	5315515	50	PG 29	6	6.5	42	12	48	5315292	5315542	20
PG 16	2	8	33	10	42	5315853	5315653	50	PG 29	6	7	42	12	48	5315293	5315543	20
PG 16	2	9	33	10	42	5315854	5315654	50	PG 29	7	6	42	12	48	5315294	5315544	20
PG 16	3	3	27	10	40	5315855	5315655	50	PG 29	7	7	42	12	48	5315898	5315698	20
PG 16	3	4	27	10	40	5315856	5315656	50	PG 29	8	5	42	12	48	5315899	5315699	20
PG 16	3	5	27	10	40	5315857	5315657	50	PG 29	8	6	42	12	48	5315295	5315545	20
PG 16	3	5.6	27	10	40	5315858	5315658	50	PG 29	10	6	42	12	48	5315900	5315700	20
PG 16	3	6	27	10	40	5315859	5315659	50	PG 29	11	5	42	12	48	5315296	5315546	20
PG 16	3	7	33	10	42	5315860	5315660	50	PG 29	28	3	42	12	48	5315297	5315547	20
PG 16	3	8	33	10	42	5315861	5315661	50									

Locknuts and seal rings sold separately, see pages 24 and 35.

Cable Gland *Industrial Multi-Conductor (Metric) - Polyamide*



Material:

- Body: Polyamide PA 6
25 % Glass-fiber Reinforced
- Seal: Tefabloc

Characteristics:

- Metric thread
- Multi-holed seal inserts


Temperature Range
-30 to 120°C (-22 to 248°F)

Technical properties:

- Gas tight and watertight
- Completely twist protected
- Combinable with various sealing inserts

Applications:

- Machines and devices
- Measuring and control engineering
- Plant installations

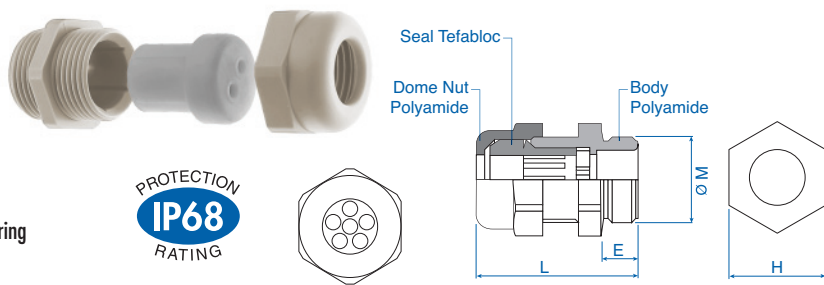

Outer thread	Hole Quantity	Hole diameter mm	H mm	E mm	L mm	Cat. No. Light Grey	Cat. No. Black	Std. Pk.	Outer thread	Hole Quantity	Hole diameter mm	H mm	E mm	L mm	Cat. No. Light Grey	Cat. No. Black	Std. Pk.
M 16 x 1.5	2	1	19	8	32	5316100	5318100	50	M 25 x 1.5	4	6	33	11	44	5316305	5318305	20
M 16 x 1.5	2	3	19	8	32	5316101	5318101	50	M 25 x 1.5	5	5	33	11	44	5316306	5318306	20
M 16 x 1.5	2	3.5	19	8	32	5316102	5318102	50	M 25 x 1.5	5	6	33	11	44	5316307	5318307	20
M 16 x 1.5	2	4	19	8	32	5316103	5318103	50	M 25 x 1.5	5	6.5	33	11	44	5316308	5318308	20
M 16 x 1.5	3	3	19	8	32	5316104	5318104	50	M 25 x 1.5	6	4	33	11	44	5316309	5318309	20
M 20 x 1.5	2	3	24	9	36	5316200	5318200	50	M 25 x 1.5	6	5	33	11	44	5316310	5318310	20
M 20 x 1.5	2	4	27	9	39	5316201	5318201	50	M 25 x 1.5	8	4	33	11	44	5316311	5318311	20
M 20 x 1.5	2	5	27	9	39	5316202	5318202	50	M 25 x 1.5	8	5	33	11	44	5316312	5318312	20
M 20 x 1.5	2	6	27	9	39	5316203	5318203	50	M 25 x 1.5	21	2	33	11	44	5316313	5318313	20
M 20 x 1.5	2	7	27	9	39	5316204	5318204	50	M 32 x 1.5	2	9	42	12	55	5316400	5318400	20
M 20 x 1.5	3	2	24	9	36	5316205	5318205	50	M 32 x 1.5	2	11	42	12	55	5316401	5318401	20
M 20 x 1.5	3	3	27	9	39	5316206	5318206	50	M 32 x 1.5	2	12	42	12	55	5316402	5318402	20
M 20 x 1.5	3	4	27	9	39	5316207	5318207	50	M 32 x 1.5	3	9	42	12	55	5316403	5318403	20
M 20 x 1.5	3	5	27	9	39	5316208	5318208	50	M 32 x 1.5	3	11	42	12	55	5316404	5318404	20
M 20 x 1.5	3	5.6	27	9	39	5316209	5318209	50	M 32 x 1.5	4	8	42	12	55	5316405	5318405	20
M 20 x 1.5	3	6	27	9	39	5316210	5318210	50	M 32 x 1.5	4	9	42	12	55	5316406	5318406	20
M 20 x 1.5	4	3	24	9	36	5316211	5318211	50	M 32 x 1.5	4	10	42	12	55	5316407	5318407	20
M 20 x 1.5	4	4	27	9	39	5316212	5318212	50	M 32 x 1.5	6	6	42	12	55	5316408	5318408	20
M 20 x 1.5	5	4	27	9	39	5316213	5318213	50	M 32 x 1.5	6	6.5	42	12	55	5316409	5318409	20
M 20 x 1.5	5	5	27	9	39	5316214	5318214	50	M 32 x 1.5	6	7	42	12	55	5316410	5318410	20
M 20 x 1.5	6	3.5	24	9	36	5316215	5318215	50	M 32 x 1.5	7	6	42	12	55	5316411	5318411	20
M 20 x 1.5	6	4	27	9	39	5316216	5318216	50	M 32 x 1.5	7	7	42	12	55	5316412	5318412	20
M 20 x 1.5	10	2	24	9	36	5316217	5318217	50	M 32 x 1.5	8	5	42	12	55	5316413	5318413	20
M 25 x 1.5	2	4.5	33	11	44	5316300	5318300	20	M 32 x 1.5	8	6	42	12	55	5316414	5318414	20
M 25 x 1.5	2	8	33	11	44	5316301	5318301	20	M 32 x 1.5	10	6	42	12	55	5316415	5318415	20
M 25 x 1.5	3	7	33	11	44	5316302	5318302	20	M 32 x 1.5	11	5	42	12	55	5316416	5318416	20
M 25 x 1.5	3	8	33	11	44	5316303	5318303	20	M 32 x 1.5	28	3	42	12	55	5316417	5318417	20
M 25 x 1.5	4	5	33	11	44	5316304	5318304	20									

Locknuts and seal rings sold separately, see pages 24 and 35.

Cable Gland *Industrial Multi-Conductor (PG) - Nickel-Plated Brass*



Material:

- Body: Nickel-Plated Brass
- Seal: Tefabloc
- Sealing ring for outer thread: Nitril

Characteristics:

- PG thread
- Multi-holed seal inserts



Temperature Range
 -25 to 120°C
 (-13 to 248°F)

Technical properties:

- Gas tight and watertight
- Completely twist protected
- Combinable with various sealing inserts

Applications:

- Machines and devices
- Measuring and control engineering
- Plant installations

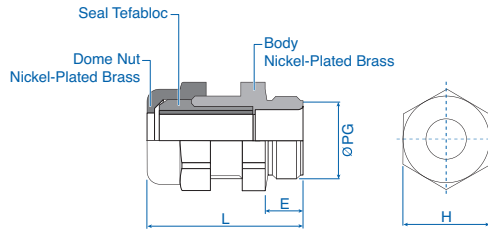

Outer thread	Hole Quantity	Hole diameter mm	H mm	E mm	L mm	Cat. No.	Std. Pk.
PG 7	1	4	14	5	24	4248640	50
PG 7	1	5	14	5	24	4248641	50
PG 9	1	5	17	6	25	4248642	50
PG 9	2	1	17	6	25	4248643	50
PG 9	2	3	17	6	25	4248644	50
PG 9	2	3.5	17	6	25	4248645	50
PG 9	2	4	17	6	25	4248646	50
PG 9	3	3	17	6	25	4248647	50
PG 9	4	3	20	6	26	4248648	50
PG 9	4	4	20	6	26	4248649	50
PG 11	2	2.3	20	6	26	4248650	50
PG 11	2	3	20	6	26	4248651	50
PG 11	2	3.5	20	6	26	4248405	50
PG 11	2	4	20	6	26	4248652	50
PG 11	2	5	20	6	26	4248660	50
PG 11	2	6	24	6.5	30	4248661	50
PG 11	3	3	20	6	26	4248653	50
PG 11	3	3.5	20	6	26	4248407	50
PG 11	3	4	20	6	26	4248654	50
PG 11	3	5	24	6.5	30	4248662	50
PG 11	3	5.3	22	6.5	28	4248655	50
PG 11	4	1.5	20	6	26	4248656	50
PG 11	4	3.5	20	6	26	4248657	50
PG 11	6	2	20	6	26	4248658	50
PG 11	6	2.5	20	6	26	4248659	50
PG 13.5	2	3	22	6.5	28	4248663	50
PG 13.5	2	5	22	6.5	28	4248664	50
PG 13.5	2	6	22	6.5	28	4248404	50
PG 13.5	3	2	22	6.5	28	4248665	50
PG 13.5	3	3	22	6.5	28	4248666	50
PG 13.5	3	4	22	6.5	28	4248667	50
PG 13.5	3	5.3	24	6.5	30	4248668	50
PG 13.5	3	6	24	6.5	30	4248669	50
PG 13.5	4	3	22	6.5	28	4248670	50
PG 13.5	4	4	22	6.5	28	4248671	50
PG 13.5	4	5	24	6.5	30	4248673	50
PG 13.5	4	5.3	24	6.5	30	4248672	50
PG 13.5	6	3.5	22	6.5	28	4248674	50
PG 13.5	10	2	22	6.5	28	4248675	50
PG 16	2	4	24	6.5	30	4248678	50
PG 16	2	5	24	6.5	30	4248679	50
PG 16	2	6	24	6.5	30	4248680	50
PG 16	2	7	24	6.5	30	4248409	50
PG 16	2	8	30	7	35	4248681	50
PG 16	2	9	30	7	35	4248682	50
PG 16	3	3	24	6.5	30	4248683	50
PG 16	3	4	24	6.5	30	4248684	50
PG 16	3	5	24	6.5	30	4248677	50
PG 16	3	5.6	24	6.5	30	4248685	50
PG 16	3	6	24	6.5	30	4248686	50
PG 16	3	7	30	7	35	4248695	50
PG 16	3	8	24	6.5	30	4248687	50

Outer thread	Hole Quantity	Hole diameter mm	H mm	E mm	L mm	Cat. No.	Std. Pk.
PG 16	4	4	24	6.5	30	4248688	50
PG 16	4	5	30	7	35	4248689	50
PG 16	4	6	30	7	35	4248694	50
PG 16	5	4	24	6.5	30	4248690	50
PG 16	5	5	30	7	35	4248691	50
PG 16	6	4	24	6.5	30	4248692	50
PG 16	7	4	30	7	35	4248693	50
PG 21	2	4.5	30	7	35	4248696	20
PG 21	2	8	30	7	35	4248697	20
PG 21	2	8.7	40	8	43	4248698	20
PG 21	2	9	40	8	43	4248699	20
PG 21	2	11	40	8	43	4248700	20
PG 21	3	7	30	7	35	4248542	20
PG 21	3	8	30	7	35	4248531	20
PG 21	3	9	40	8	43	4248701	20
PG 21	4	5	30	7	35	4248702	20
PG 21	4	6	30	7	35	4248529	20
PG 21	4	7.5	40	8	43	4248709	20
PG 21	4	8	40	8	43	4248703	20
PG 21	5	5	30	7	35	4248704	20
PG 21	5	6	30	7	35	4248539	20
PG 21	5	6.5	30	7	35	4248541	20
PG 21	6	4	30	7	35	4248705	20
PG 21	6	5	30	7	35	4248706	20
PG 21	6	6	40	8	43	4248713	20
PG 21	6	6.5	40	8	43	4248710	20
PG 21	6	7	40	8	43	4248715	20
PG 21	7	6	40	8	43	4248714	20
PG 21	8	4	30	7	35	4248707	20
PG 21	8	5	30	7	35	4248543	20
PG 21	11	5	40	8	43	4248712	20
PG 21	21	2	30	7	35	4248708	20
PG 21	28	3	40	8	43	4248711	20
PG 29	2	9	40	8	43	4248716	20
PG 29	2	11	40	8	43	4248717	20
PG 29	3	9	40	8	43	4248719	20
PG 29	3	11	40	8	43	4248720	20
PG 29	4	8	40	8	43	4248629	20
PG 29	4	9	40	8	43	4248721	20
PG 29	4	10	40	8	43	4248722	20
PG 29	6	6	40	8	43	4248627	20
PG 29	6	6.5	40	8	43	4248610	20
PG 29	6	7	40	8	43	4248614	20
PG 29	7	6	40	8	43	4248631	20
PG 29	7	7	40	8	43	4248723	20
PG 29	8	5	40	8	43	4248724	20
PG 29	8	6	40	8	43	4248632	20
PG 29	10	6	40	8	43	4248725	20
PG 29	11	5	40	8	43	4248634	20
PG 29	28	3	40	8	43	4248612	20

Locknuts sold separately, see page 25.

Cable Gland Industrial Multi-Conductor (Metric) - Nickel-Plated Brass

Material:

- Body: Nickel-Plated Brass
- Seal: Tefabloc
- Sealing ring for outer thread: Nitril

Characteristics:


- Metric thread
- Multi-holed seal inserts
- Extended thread available

Technical properties:

- Gas tight and watertight
- Completely twist protected
- Combinable with various sealing inserts

Applications:

- Machines and devices
- Measuring and control engineering
- Plant installations

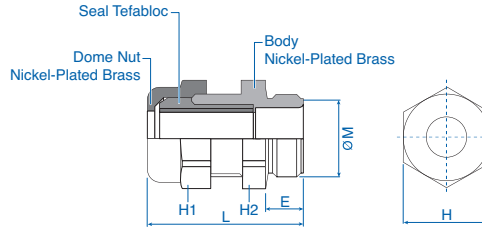

Temperature Range	
-25 to 120°C (-13 to 248°F)	

Outer thread	Hole Quantity	Hole diameter mm	H1 mm	H2 mm	E mm	L mm	Cat. No.	Std. Pk.
M 16 x 1.5	2	1	17	17	7	13	4249600	50
M 16 x 1.5	2	3	17	17	7	13	4249601	50
M 16 x 1.5	2	3.5	17	17	7	13	4249602	50
M 16 x 1.5	2	4	17	17	7	13	4249603	50
M 16 x 1.5	3	3	17	17	7	13	4249604	50
M 20 x 1.5	2	2.3	20	22	7	28	4249610	50
M 20 x 1.5	2	3	22	22	7	29	4249611	50
M 20 x 1.5	2	3.5	20	22	7	28	4249612	50
M 20 x 1.5	2	4	20	22	7	28	4249613	50
M 20 x 1.5	2	5	22	22	7	29	4249614	50
M 20 x 1.5	2	6	22	22	7	29	4249615	50
M 20 x 1.5	3	2	22	22	7	29	4249616	50
M 20 x 1.5	3	3	22	22	7	29	4249617	50
M 20 x 1.5	3	3.5	20	22	7	28	4249618	50
M 20 x 1.5	3	4	22	22	7	29	4249619	50
M 20 x 1.5	3	5.3	22	22	7	29	4249620	50
M 20 x 1.5	4	1.5	20	22	7	28	4249621	50
M 20 x 1.5	4	3	22	22	7	29	4249622	50
M 20 x 1.5	4	3.5	20	22	7	28	4249623	50
M 20 x 1.5	4	4	22	22	7	29	4249624	50
M 20 x 1.5	6	2	20	22	7	28	4249625	50
M 20 x 1.5	6	2.5	20	22	7	28	4249626	50
M 20 x 1.5	6	3.5	22	22	7	29	4249627	50
M 20 x 1.5	10	2	22	22	7	29	4249628	50
M 25 x 1.5	2	4	24	26	8	31	4249640	20
M 25 x 1.5	2	4.5	30	30	8	37	4249641	20
M 25 x 1.5	2	5	24	26	8	31	4249642	20
M 25 x 1.5	2	6	24	26	8	31	4249643	20
M 25 x 1.5	2	7	24	26	8	31	4249644	20
M 25 x 1.5	2	8	30	30	8	37	4249645	20
M 25 x 1.5	3	3	24	26	8	31	4249646	20
M 25 x 1.5	3	4	24	26	8	31	4249647	20
M 25 x 1.5	3	5	24	26	8	31	4249648	20
M 25 x 1.5	3	5.6	24	26	8	31	4249649	20
M 25 x 1.5	3	6	24	26	8	31	4249650	20
M 25 x 1.5	3	7	30	30	8	37	4249651	20
M 25 x 1.5	3	8	30	30	8	37	4249652	20
M 25 x 1.5	4	4	24	26	8	31	4249653	20
M 25 x 1.5	4	5	30	30	8	37	4249654	20
M 25 x 1.5	4	6	30	30	8	37	4249655	20
M 25 x 1.5	5	4	24	26	8	31	4249656	20
M 25 x 1.5	5	5	30	30	8	37	4249657	20
M 25 x 1.5	5	6	30	30	8	37	4249658	20
M 25 x 1.5	5	6.5	30	30	8	37	4249659	20
M 25 x 1.5	6	4	30	30	8	37	4249660	20
M 25 x 1.5	6	5	30	30	8	37	4249661	20
M 25 x 1.5	8	4	30	30	8	37	4249662	20
M 25 x 1.5	8	5	30	30	8	37	4249663	20
M 25 x 1.5	21	2	30	30	8	37	4249664	20

Outer thread	Hole Quantity	Hole diameter mm	H1 mm	H2 mm	E mm	L mm	Cat. No.	Std. Pk.
M 32 x 1.5	2	4.5	30	33	8.5	38	4249670	20
M 32 x 1.5	2	8	30	33	8.5	38	4249671	20
M 32 x 1.5	2	9	40	40	8.5	45	4249672	20
M 32 x 1.5	2	11	40	40	8.5	45	4249673	20
M 32 x 1.5	2	12	40	40	8.5	45	4249674	20
M 32 x 1.5	3	7	30	33	8.5	38	4249675	20
M 32 x 1.5	3	8	30	33	8.5	38	4249676	20
M 32 x 1.5	3	9	40	40	8.5	45	4249677	20
M 32 x 1.5	3	11	40	40	8.5	45	4249678	20
M 32 x 1.5	4	5	30	33	8.5	38	4249679	20
M 32 x 1.5	4	6	30	33	8.5	38	4249680	20
M 32 x 1.5	4	8	40	40	8.5	45	4249681	20
M 32 x 1.5	4	9	40	40	8.5	45	4249682	20
M 32 x 1.5	4	10	40	40	8.5	45	4249683	20
M 32 x 1.5	5	5	30	33	8.5	38	4249684	20
M 32 x 1.5	5	6	30	33	8.5	38	4249685	20
M 32 x 1.5	5	6.5	30	33	8.5	38	4249686	20
M 32 x 1.5	6	4	30	33	8.5	38	4249687	20
M 32 x 1.5	6	5	30	33	8.5	38	4249688	20
M 32 x 1.5	6	6	40	40	8.5	45	4249689	20
M 32 x 1.5	6	6.5	40	40	8.5	45	4249690	20
M 32 x 1.5	6	7	40	40	8.5	45	4249691	20
M 32 x 1.5	7	6	40	40	8.5	45	4249692	20
M 32 x 1.5	7	7	40	40	8.5	45	4249693	20
M 32 x 1.5	8	4	30	33	8.5	38	4249694	20
M 32 x 1.5	8	5	40	40	8.5	45	4249695	20
M 32 x 1.5	8	6	40	40	8.5	45	4249696	20
M 32 x 1.5	10	6	40	40	8.5	45	4249697	20
M 32 x 1.5	11	5	40	40	8.5	45	4249698	20
M 32 x 1.5	21	2	30	33	8.5	38	4249699	20
M 32 x 1.5	28	3	40	40	8.5	45	4249701	20

Locknuts sold separately, see page 25.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:

Click to view products by [Altech](#) manufacturer:

Other Similar products are found below :

[1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [15190-103 R2](#) [300623](#) [07402002](#) [VC-M-KV-PG16 1X3/1X8](#) [5525](#) [35935](#) [35882](#) [M4340GAE](#)
[4597](#) [NG-9516 Gasket](#) [52006157](#) [52006176](#) [BM4963L](#) [53629556](#) [53629570](#) [53629675](#) [52025230](#) [52024853](#) [52103160](#) [52115810](#)
[53017640](#) [53019051](#) [53112270](#) [53112330](#) [53112860](#) [53112879](#) [53112929](#) [53111470](#) [53015270](#) [53015090](#) [53018090](#) [PG-29](#) [36680](#) [36681](#)
[36550](#) [35226](#) [35228](#) [36382](#) [36310](#) [35231](#) [36818](#) [36302](#) [36827](#) [37102-90](#) [35203](#) [35098](#)