




# Measuring Leads 4 mm System



## Type

**MLN 25/1      MLN 50/1      MLN 100/1      MLN 150/1      MLN 200/1**

Measuring lead, at either end 4mm diameter plug with caged spring and 4mm diameter socket for tower construction. Nickel-plated copper beryllium contact spring. Highly flexible, double insulated stranded lead, grip and lead shatter-proof. Built in colour indicator for easy identification of insulation damages.

	MLN 25/1	MLN 50/1	MLN 100/1	MLN 150/1	MLN 200/1
Cable length	<b>0.25m (9.8")</b>	<b>0.5m (19.7")</b>	<b>1.0m (39.4")</b>	<b>1.5m (59.1")</b>	<b>2.0m (78.7")</b>
Cable size	1 mm <sup>2</sup> (17 AWG)	1 mm <sup>2</sup> (17 AWG)	1 mm <sup>2</sup> (17 AWG)	1 mm <sup>2</sup> (17 AWG)	1 mm <sup>2</sup> (17 AWG)
Cable material	PVC	PVC	PVC	PVC	PVC
Pin dimensions	4 mm (0.157")	4 mm (0.157")	4 mm (0.157")	4 mm (0.157")	4 mm (0.157")
Cable type	LEH-XY	LEH-XY	LEH-XY	LEH-XY	LEH-XY
<b>PART NO. / Housing color</b>	● <b>934058100</b> ● <b>934058101</b> ● <b>934058102</b> ● <b>934058103</b> ● <b>934058104</b>	● <b>934060100</b> ● <b>934060101</b> ● <b>934060102</b> ● <b>934060103</b> ● <b>934060104</b>	● <b>934062100</b> ● <b>934062101</b> ● <b>934062102</b> ● <b>934062103</b> ● <b>934062104</b>	● <b>934064100</b> ● <b>934064101</b> ● <b>934064102</b> ● <b>934064103</b> ● <b>934064104</b>	● <b>934065100</b> ● <b>934065101</b> ● <b>934065102</b> ● <b>934065103</b> ● <b>934065104</b>

## Technical Data

	MLN 25/1	MLN 50/1	MLN 100/1	MLN 150/1	MLN 200/1
Contact Type	spring-loaded pin	spring-loaded pin	spring-loaded pin	spring-loaded pin	spring-loaded pin
Voltage Rating	30 VAC / 60 VDC	30 VAC / 60 VDC	30 VAC / 60 VDC	30 VAC / 60 VDC	30 VAC / 60 VDC
Measurement Category (IEC61010)	CAT I	CAT I	CAT I	CAT I	CAT I
Current Rating*	16A	16A	16A	16A	16A
Contact Resistance	8.5 mOhm	13 mOhm	22 mOhm	34 mOhm	40 mOhm

## Material Specifications

Contact Pin	nickel plated brass
Contact Spring	nickel plated copper-beryllium
Housing	Polyamide

## Environmental Conditions


Temperature Range	-15 °C to +70 °C
-------------------	------------------

## Flamability Rating

Housing	UL 94 V-2
---------	-----------

## Drawing

Measurements are shown in millimeters.  
Multiply by 0.03937 to convert to inches.

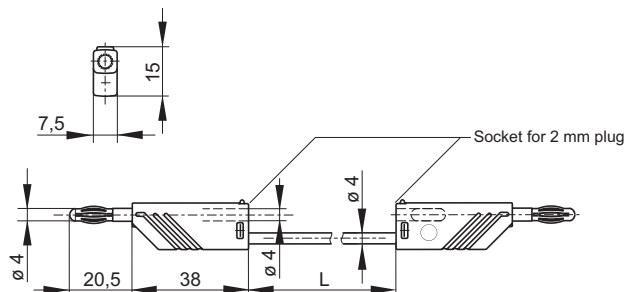

\* Please consider derating graph on page 80.

For the latest on Altech Test & Measurement specifications please visit [www.altechcorp.com/test-equipment](http://www.altechcorp.com/test-equipment)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Breaker Accessories](#) category:*

*Click to view products by [Altech](#) manufacturer:*

Other Similar products are found below :

[CSC-403PS](#) [8T1-D-11A](#) [B151-7184-L](#) [NEB10](#) [8C1-C-721](#) [8T1-E-115](#) [8T1-E-275](#) [8T1-E-278](#) [4-1393247-8](#) [4-1393247-9](#) [506-11315-001](#)  
[3803221](#) [3803231](#) [NEB6](#) [X10506BF](#) [NES](#) [9-1393249-0](#) [802-ESB50UL489](#) [3RV2011-1CA15](#) [607.5689.127](#) [30.329](#) [CA707/TS/01](#)  
[11-32-2733](#) [X10508BF](#) [X22261102](#) [975090700](#) [CX2.5/4/O](#) [975090701](#) [PS-2P](#) [Y30019003](#) [C-TEC1225 P](#) [PS-1006](#) [618.6335.069](#)  
[975455700](#) [BAC03](#) [930727103](#) [934097101](#) [ZG20-1](#) [934097100](#) [JX2.5/4](#) [KEM380CUL](#) [CC848756916](#) [JX2.5/6](#) [JX2.5/5](#) [HSP6/10U](#)  
[DMRBU BLACK BOX](#) [DB16/BU](#) [DB16/BL](#) [CM2.5S2](#) [973604100](#)