

# Alligator Clips 4 mm System



CE



CE



CE

## Type

### MA 260 SH

Touch proof mini Alligator Clip, nickel plated bronze, jaw opening 6mm, 4mm system socket and solder terminal.

### AK 2 B

High Strength Alligator Clip, touch proof, nickel plated brass, 9.5mm jaw opening, 4mm system socket terminal.

### AK 2 B 2540 I

High Strength wide opening Alligator Clip, touch proof, nickel plated brass, 30mm jaw opening, 4mm system socket terminal.

Clamping range

6 mm (0.24")

9.5 mm (0.37")

30 mm (1.18")

PART NO. / Housing color

**973889100** ●  
**973889101** ●

**932435100** ●  
**932435101** ●

**972405100** ●  
**972405101** ●  
**972405102** ●  
**972405103** ●  
**972405104** ●  
**972405188** ●

## Technical Data

Contact Type	alligator clip
Connection Type	socket Ø 4 mm, solder terminal
Voltage Rating	AC/DC 300 V
Measurement Category (IEC61010)	CAT II
Current Rating*	15 A
Contact Resistance	5 mOhm

### Material Specifications

Alligator Clip	nickel plated bronze
Housing	PA

### Environmental Conditions

Temperature Range	-25°C to +80 °C (13°F to 176°F)
-------------------	---------------------------------

### Flamability Rating

Housing	UL 94 HB
---------	----------

Contact Type	alligator clip
Connection Type	socket Ø 4 mm, solder terminal
Voltage Rating	AC/DC 300 V
Measurement Category (IEC61010)	CAT II
Current Rating*	25 A
Contact Resistance	10 mOhm

Alligator Clip	nickel plated brass
Housing	PP

Temperature Range	-25°C to +80 °C (13°F to 176°F)
-------------------	---------------------------------

Housing	UL 94 HB
---------	----------

Contact Type	alligator clip
Connection Type	socket Ø 4 mm
Voltage Rating	AC/DC 1000 V
Measurement Category (IEC61010)	CAT II
Current Rating*	32 A
Contact Resistance	10 mOhm




Alligator Clip	nickel plated brass
Housing	PP

Temperature Range	-30°C to +90 °C (22°F to 194°F)
-------------------	---------------------------------

Housing	UL 94 HB
---------	----------

## Drawing

Measurements are shown in millimeters.  
Multiply by 0.03937 to convert to inches.

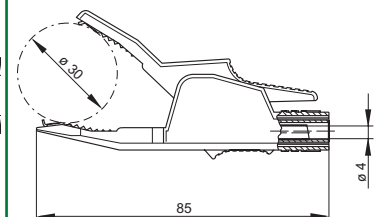

\* Please consider derating graph on page 80.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Clips](#) category:*

*Click to view products by [Altech](#) manufacturer:*

Other Similar products are found below :

[010000](#) [923743-16](#) [923850-C](#) [927739-40](#) [BU-656-0](#) [923738-28](#) [4140A](#) [4324A](#) [TL820](#) [TL822](#) [5116](#) [5450](#) [5216](#) [5252](#) [5454](#) [5694](#) [923700](#)  
[923698](#) [CR0060](#) [3038](#) [0040.1151.2](#) [927739-20](#) [923743-14](#) [923743-40](#) [R999701600](#) [923706](#) [5240](#) [603006001](#) [930317800](#) [930317801](#)  
[973889100](#) [923714](#) [R999710600](#) [949-1](#) [458-3](#) [SK 201200278 020](#) [AA0-A4830-A00](#) [00425](#) [R8-1A RED](#) [R8-1B BLACK](#) [R8-54 RED](#)  
[MA1SW](#) [MA260SH SW](#) [AX-CR-02-SET](#) [5004-LM-IEC-RT](#) [5004-LM-IEC-SW](#) [5066-IEC-GE](#) [5066-IEC-SW](#) [BU-26-6](#) [BU-40C-2](#)