


Altech Corp.®

Serving the Automation & Control Industry since 1984



ISO 9001
GM-NA Global

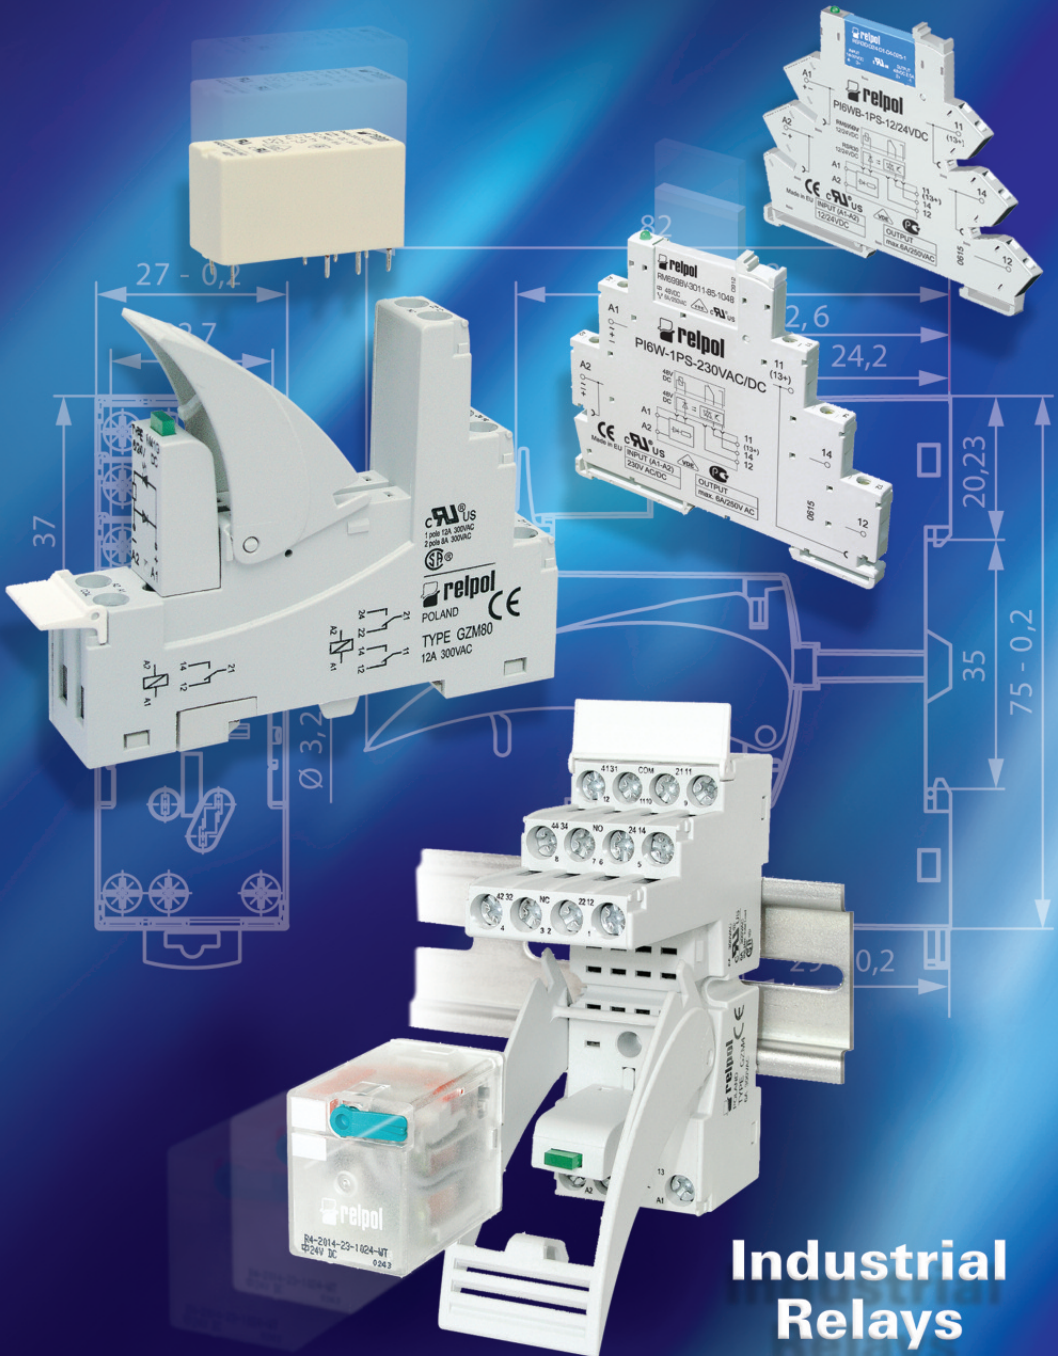


Industrial Relays

Altech Corp.®

Since 1984, Altech Corporation has grown to become a leading supplier of automation and industrial control components. Headquartered in Flemington, NJ, Altech has an experienced staff of engineering, manufacturing and sales personnel to provide the highest quality products with superior service. This is the Altech Commitment!

With experienced Product Engineers and Customer Service personnel, Altech provides solutions to your most pressing application challenges. All with one thought in mind - *to ensure that we solve your problem the first time!*

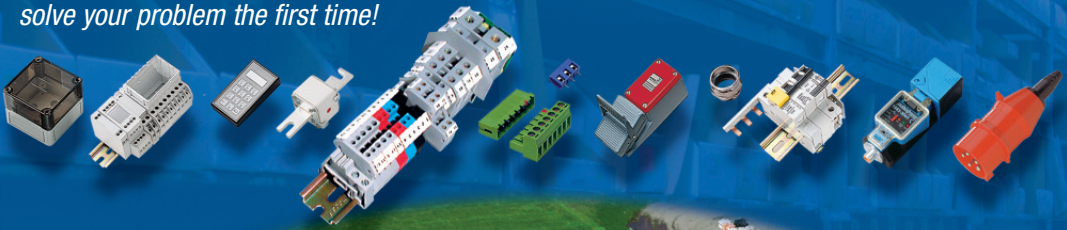

Altech's Commitment

Altech's Automation and Control components meet applicable national and international standards, such as UL, NEC, CSA, IEC and VDE. Altech provides these products with superior customer service and delivery through a ISO 9001 Quality Management system, which stresses continuous process improvement. We perform these services with honesty and integrity. All Altech employees are trained in this Quality Management System and are dedicated to achieve these goals. Altech's quality system has been ISO approved since 1999.






Altech Corp.® • t 908-806-9400 • f 908-806-9490 • www.altechcorp.com

Industrial Relays

Altech Corp.[®]

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		R2	R3	R4
<ul style="list-style-type: none"> • Single-phase motor applications • Type of insulation: basic • Type of clearance: micro-disconnection 				
Contact data				
Number and type of contacts		2CO	3CO	4CO
Rated / max. switching voltage AC		250V / 440V	250V / 440V	250V / 250V
Rated load (capacity)		AC1 12A / 250V AC AC15 3A / 120V (B300) AC15 1.5A / 240V (B300) AC3 370W DC1 12A / 24V DC DC13 0.22A / 120V (R300) DC13 0.1A / 250V (R300)	10A / 250V AC 3A / 120V (B300) 1.5A / 240V (B300) 370W 10A / 24V DC 0.22A / 120V (R300) 0.1A / 250V (R300)	6A / 250V AC 1.5A / 120V (C300) 0.75A / 240V (C300) 125W 6A / 24V DC 0.22A / 120V (R300) 0.1A / 250V (R300)
Coil data				
Rated voltage AC		6...240V 50/60Hz	6...240V 50/60Hz	6...240V 50/60Hz
DC		5...220V	5...220V	5...220V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	250V AC
Dielectric strength				
•between coil and contacts		2500V AC	2500V AC	2500V AC
•contact clearance		1500V AC	1500V AC	1500V AC
General data				
Dimensions (LxWxH)mm		27.5 x 21.2 x 35.6	27.5 x 21.2 x 35.6	27.5 x 21.2 x 35.6
Examples AC coil		R2-2012-23-5230-WT	R3-2013-23-5230-WT	R4-2014-23-5230-WT
of ordering code DC coil		R2-2012-23-1024-WT	R3-2013-23-1024-WT	R4-2014-23-1024-WT
Plug-in sockets for relays		GZT2, GZM2	GZT3, GZM3	GZT4, GZM4

Plug-in sockets for relays

For additional accessories please see page 10.



GZT2

For R2

GZM2

For R2

GZT3

For R3

GZM3

For R3

GZT4




For R4

GZM4

For R4

Industrial Relays

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		RY2	R2M	RUC
<ul style="list-style-type: none"> • Single-phase motor applications • Type of insulation: basic • Type of clearance: micro-disconnection 				
Contact data				
Number and type of contacts		2 CO	2 CO	2CO, 3CO, 2NO
Rated / max. switching voltage	AC	250V / 440V	250V / 250V	400V / 440V
Rated load (capacity)	AC1	12A / 250V AC	5A / 250V AC	16A / 250V AC
	AC15			
	AC15			
	AC3			
	DC1	12A / 30V DC	5A / 24V DC	16A / 24V DC
	DC13			
	DC13			
Coil data				
Rated voltage	AC	6...240V 50/60Hz	6...240V 50/60Hz	6...240V 50/60Hz
	DC	5...220V	6...110V	6...220V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	400V AC
Dielectric strength				
•between coil and contacts		2500V AC	2000V AC	2500 V AC
•contact clearance		1000V AC	1000V AC	1500, 2500 V AC
General data				
Dimensions (LxWxH)mm		27.5 x 21.1 x 34.5	27.5 x 14 x 32.9	36.1 x 38.6 x 45.5
Examples	AC coil	RY2-2012-26-5230	R2M-2012-23-5230	RUC-2012-26-5230
of ordering code	DC coil	RY2-2012-26-1024	R2M-2012-23-1024	RUC-2013-26-1024
Plug-in sockets for relays		GZY2	GZ2	GUC11

Plug-in sockets for relays

For additional accessories please see page 10.



GZY2

For RY2



GZ2

For R2M






GUC11

For RUC

Industrial Relays

Altech Corp.[®]

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		R15 (2CO)	R15 (3CO)	R15 (4CO)
<ul style="list-style-type: none"> • Single-phase motor applications • Type of insulation: basic • Type of clearance: micro-disconnection 				
Contact data				
Number and type of contacts		2CO	3CO	4CO
Rated / max. switching voltage AC		250V / 440V	250V / 440V	250V / 250V
Rated load (capacity)		AC1 10A / 250V AC AC15 3A / 120V (B300) AC15 1.5A / 240V (B300) AC3 370W DC1 10A / 24V DC DC13 0.22A / 120V (R300) DC13 0.1A / 250V (R300)	10A / 250V AC 3A / 120V (B300) 1.5A / 240V (B300) 370W 10A / 24V DC 0.22A / 120V (R300) 0.1A / 250V (R300)	10A / 250V AC 3A / 120V (B300) 1.5A / 240V (B300) 370W 10A / 24V DC 0.22A / 120V (R300) 0.1A / 250V (R300)
Coil data				
Rated voltage AC		6...240V 50/60Hz	6...240V 50/60Hz	6...240V 50Hz,60Hz
DC		6...220V	6...220V	6...220V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	250V AC
Dielectric strength •between coil and contacts •contact clearance		2500V AC 1500V AC	2500V AC 1500V AC	2500V AC 1500V AC
General data				
Dimensions (LxWxH)mm		35 x 35 x 54.4	35 x 35 x 54.4	35 x 42.5 x 54.5
Examples of ordering code		AC coil R15-2012-23-5230-WT DC coil R15-2012-23-1024-WT	R15-2013-23-5230-WT R15-2013-23-1024-WT	R15-1014-23-3230 R15-1014-23-1024
Plug-in sockets for relays		PZ8, GZU8, GZP8	PS11, PZ11	GZ14U

Plug-in sockets for relays

For additional accessories please see page 10.



PZ8

For R15 2 CO

GZU8

For R15 2 CO

GZP8

For R15 2 CO

PS11

For R15 3 CO

PZ11

For R15 3 CO

GZP11




For R15 3 CO

GZ14U

For R15 4 CO

Industrial Relays

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		RS35, RS50	RM699B	RSR30
<ul style="list-style-type: none"> Solar system control PLC control Type of insulation: basic Type of clearance: micro-disconnection 				
Contact Data				
Number and type of contacts		2NO	1CO	SSR
Applications		Solar Power	PLC Control	PLC Control
Rated/max. switching voltage	AC	250V /440V	250V / 400V	240V
Rated load (capacity)	AC1	35A, 48A / 250V AC	6A / 250V AC	2A / 240V AC
	DC1	35A, 48A / 24V DC	6A / 24V DC	2.5A / 48V DC 4A / 24V DC 1A / 100V DC
Coil Data				
Rated voltage	AC DC	NA 5...110V	NA 5...60V	NA see data sheet*
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	240V AC
Dielectric strength				
•between coil and contacts		5000V AC	4000V AC	SSR
•contact clearance		2500V AC	1000V AC	SSR
General Data				
Dimensions (LxWxH)mm		40 x 25 x 49.2	28 x 5 x 15	28 x 5 x 15
Examples of ordering code	AC coil DC coil	RS50-3022-25-1110	RM699BV-3011-85-1012	RSR30-D24-D1-D2-040-1 RSR30-D24-A1-24-020-1
Plug-in sockets for relays		PCB Only	PI6W-1P	PIR6W-1PS PIR6WB-1PS

Plug-in sockets for relays

For additional accessories please see page 10.

*altechcorp.com/HTML/IndustrialRelays.html



PCB not supplied

PI6W-1P

For RM699BV, RSR30




PI6W-1P

For RM699BV, RSR30

Industrial Miniature Relays


Altech Corp.®

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay	RM84	RM85	RM87
Single-phase motor applications Type of insulation: reinforced Type of clearance: micro-disconnection Type of clearance: full-disconnection			
Contact data			
Number and type of contacts	2CO, 2NO	1CO, 1NO	1CO, 1NO
Rated/max. switching voltage AC	250V / 440V	250V / 440V	250V / 440V
Rated load (capacity) AC1	8A / 250V AC	16A / 250V AC	12A / 250V AC
AC15	3A / 120V (B300)	3A / 120V (B300)	3A / 120V (B300)
AC15	1.5A / 240V (B300)	1.5A / 240V (B300)	1.5A / 240V (B300)
AC3	550W	750W	750W
DC1	8A / 24V DC	16A / 24V DC	12A / 24V DC
DC13	0.22A / 120V (R300)	0.22A / 120V (R300)	0.22A / 120V (R300)
DC13	0.1A / 250V (R300)	0.1A / 250V (R300)	0.1A / 250V (R300)
Coil data			
Rated voltage AC	12...240V 50/60Hz	12...240V 50/60Hz	12...240V 50/60Hz
DC	3...110V	3...110V	3...110V
Insulation (PN-EN60664-1)			
Insulation rated voltage	400V AC	400V AC	400V AC
Dielectric strength •between coil and contacts •contact clearance	5000V AC 1000, 2000V AC	5000V AC 1000, 2000V AC	5000V AC 1000, 2000V AC
General data			
Dimensions (LxWxH)mm	29 x 12.7 x 15.7	29 x 12.7 x 15.7	29 x 12.7 x 15.7
Examples AC coil	RM84-2012-25-5230	RM85-2011-25-5230	RM87N-2011-25-5230
of ordering code DC coil	RM84-2022-35-1012	RM85-2021-35-1012	RM87L-2021-35-1012
Plug-in sockets for relays	GZT80, GZM80, GD50	GZT80, GZM80, GD50	GZT92, GZM92, GD35

Plug-in sockets for relays

For additional accessories please see page 10.

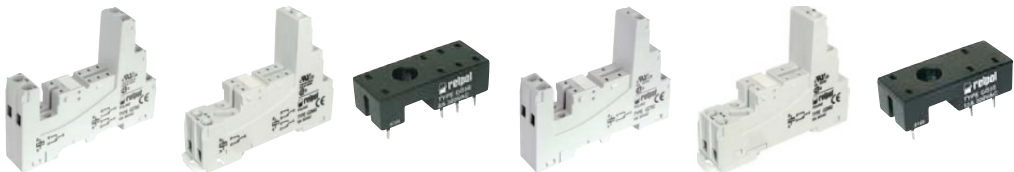

GZT80

For RM84, RM85

GZM80

For RM84, RM85

GD50

For RM84, RM85

GZT92

For RM87

GZM92




For RM87

GD35

For RM87

Industrial Interface Relays

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay	PI6-1P	PI6-1T	PI6-OC
Type of insulation: basic Type of insulation: reinforced Type of clearance: micro-disconnection Output = contacts (R) Solid state relays	electromechanical 	triac 	transistor 
Output circuit-contact data			
Number and type of contacts/outputs	1CO	1NO	1NO
Rated/max. switching voltage AC	250V / 400V	400V / 440 V	DC: 70V / 70V
Rated load AC1	6A / 250V AC 6A / 24V DC	1.2A / 400V AC	0.5A / 70V DC
Input control circuit			
Rated voltage AC:50/60Hz AC/DC	24...230V 12...36V	24...230V 5...32V	24...230V 5...32V
Insulation (PN-EN 60664-1)			
Insulation rated voltage	400V AC	600V AC	600V AC
Dielectric strength •input-output •input-output •contact clearance	4000V AC 1000V AC	4000V AC	3000V AC
General data			
Dimensions (LxWxH)mm	93.8 x 6.2 x 80	93.8 x 6.2 x 80	93.8 x 6.2 x 80
Examples of ordering code AC/DC coil AC coil DC coil	PI6-1P-230V AC/DC PI6-1P-24V DC	PI6-1T-230V AC/DC PI6-1T-5...32V DC	PI6-OC-230V AC/DC PI6-OC-5...32V DC
Operational relays Plug-in sockets LED indicator	RM699BV — LED green	RSR30 — LED green	RSR30 — LED green

For accessories please see page 10.






**Relays are built-in.
Relays are not replaceable.
See page 6.**

Industrial Interface Relays

Altech Corp.®

altechcorp.com/HTML/IndustrialRelays.html


Type of Relay	PIR6W-1P	PIR6W-1PS	PIR6WB-1PS
Type of insulation: basic Type of insulation: reinforced Type of clearance: micro-disconnection Output = contacts (R) Solid state relays	electromechanical 	electromechanical, triac, transistor 	electromechanical, triac, transistor 
Output circuit - contact data			
Number and type of contacts / outputs	1CO	1CO, 1NO	1CO, 1NO
Rated/max. switching voltage AC	250V / 400V	250V /400V	250V /400 V
Rated load AC1	6A / 250V AC	6A / 250V AC	6A / 250V AC
DC1	6A / 24V DC	6A / 24V DC	6A / 24V DC
Input control circuit			
Rated voltage AC:50/60Hz AC/DC	24...230V	24...230V	24...230V
DC	12...36V	6...60V	6...60V
Insulation (PN-EN 60664-1)			
Insulation rated voltage	250V AC	250V AC	250V AC
Dielectric strength •input-output •input-output •contact clearance	4000V AC 1000V AC	4000V AC 1000V AC	4000V AC 1000V AC
General data			
Dimensions (LxWxH)mm	98.5 x 6.2 x 85.5	98.5 x 6.2 x 85.5	98.3 x 6.2 x 84.6
Examples of ordering code AC/DC coil AC coil DC coil	PIR6W-1P-24V AC/DC PIR6W-1P-24V DC	PIR6W-1PS-24V AC/DC-R PIR6W-1PS-24V DC-R	PIR6WB-1PS-24V AC/DC-R PIR6WB-1PS-24V DC-R
Operational relays Plug-in sockets LED indicator	RM699BV PI6W-1P-... LED green	RM699BV, RSR30 PI6W-1PS-... LED green	RM699BV, RSR30 PI6WB-1PS-... LED green

For accessories please see page 10.



**Relays are replaceable.
Extra relays sold separately.
See page 6.**

Accessories for Industrial Relays

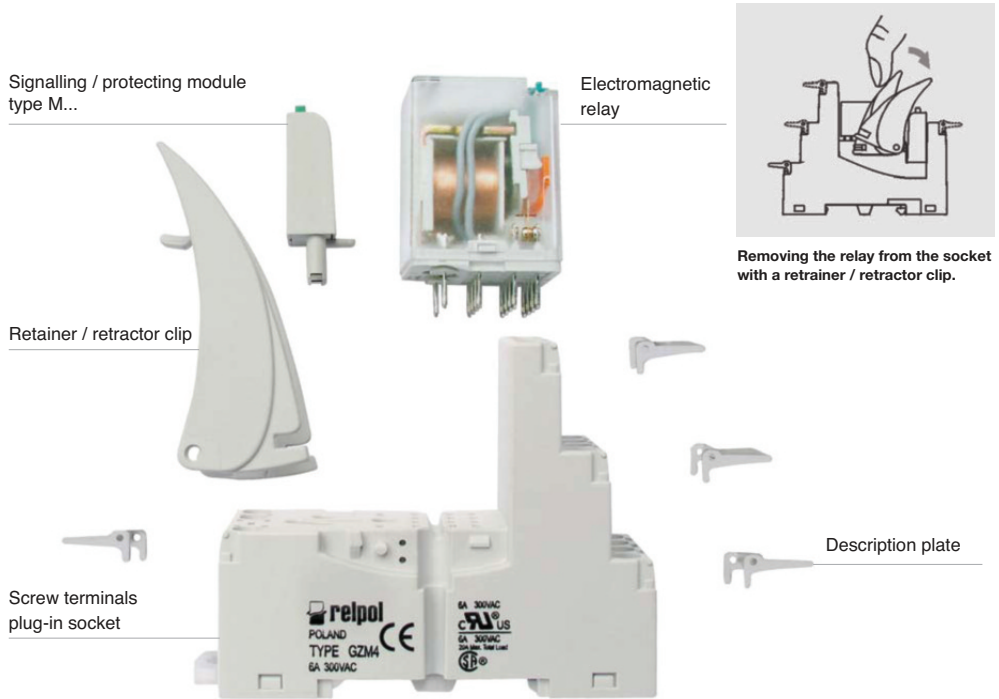

Type of plug-in socket	GZT80, GZT92 GZM80, GZM92	GZT2, GZT3, GZT4 GZM2, GZM3, GZM4
Retainer / retractor clips		
Type	GZT80-0040	GZT4-0040
Color	gray	gray
Description plates		
Type	GZT80-0035	GZT4-0035
color	white	white
For relays	RM84, RM85, RM87	R2, R3, R4
Height of relay	15...16.5 mm	35.6 mm

Accessories for Industrial Relays

For sockets type: GZT80, GZT92, GZM80, GZM92, GZS80, GZS92, ES 32
GZT2, GZT3, GZT4, GZM2, GZM3, GZM4


Modules type M... are parallel connected with relay coil.
Polarity P: -A1/+A2. Polarity N: +A1/-A2.



Modules type M...	Layout	Layout	Type of module
Module D (polarization P) It limits overvoltage on DC coils.		6/230 V DC	M21P
Module D (polarization N) It limits overvoltage on DC coils.		6/230V DC	M21N
Module LD (polarization P) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60 V DC 110/230V DC	M31R, M31G* M32R, M32G M33R, M33G
Module LD (polarization N) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60V DC 110/230V DC	M41R, M41G M42R, M42G M43R, M43G
Module RC It protects against EMC disturbance. It limits overvoltage.		6/24V AC 24/60V AC 110/240V AC	M51 M52 M53
Module L Coil energizing indication.		6/24V AC/DC 24/60V AC/DC 110/230V AC/DC	M61R, M61G* M62R, M62G M63R, M63G*
Module LV It limits overvoltage on AC and DC coils. Coil energizing indication.		6/24V AC/DC 24/60V AC/DC 110/230V AC/DC	M91R, M91G M92R, M92G M93R, M93G
Module V It limits overvoltage on AC and DC coils. No indication.		24V AC 130V AC 230V AC	M71 M72 M73
Module R It limits overvoltage on AC coils.		110/230V AC	M103

M...R - LED red, M...G - LED green

* In stock.

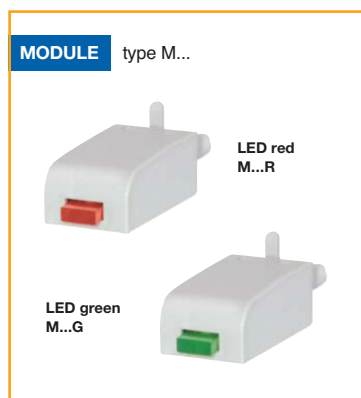

altechcorp.com

Altech Corp.®

Quality
Endorsed
Company

ISO 9001:2008
CERTIFICATE

Altech Search

Google Custom Search

- Home
- Stock Check
- Distributors
- Information
- News
- Contact
- Rep/Dial Login
- Altech Mexico



WEB TOOLS

- Product Crossings
- Request for Quote
- Sample Request
- Catalog Request

PRODUCT MENU

- Circuit Protection / Control >
- Connectors >
- Enclosures >
- European Spare Parts >
- Foot Switches
- Interface Modules >
- Power Supplies
- Push Buttons & Pilot Lights >
- Relays >
- Sensors >
- Terminal Blocks >
- Tower Lights
- Wire & Cable Management >
- Home

New Products and Promotions

Serving the Automation & Control Industry Since 1984

Circuit Protection

 Circuit Protection Devices	 Busbar and Power Distribution	 Contactors, Overload Relays, Manual Motor Starters	 Motor Disconnect Switches	 European Fuses
--	---	--	---	---

Connectors

 Industrial Rectangular Connectors	 Pin & Sleeve Devices	 Receptacles	 Foot Switches	 Inductive Proximity Sensors
---	--	---	---	--

Foot Switches

Sensors

Enclosures

 Industrial Enclosures	 DIN Enclosures	 Interface Modules	 Safety Relays	 Slimline Relays
---	--	---	---	--

Modules & Relays

Power Supplies

 Power Supplies	 22 & 30 mm Push Buttons	 DIN Rail	 Liquid Tight Strain Reliefs/Corrugated Tubes	 Wire Duct
---	--	---	---	---

Push Buttons

DIN Rail

Wire & Cable Management

Terminal Blocks

 Din Rail Terminal Blocks	 Panel Mount Terminal Blocks	 Printed Circuit Board Terminal Blocks	 Eurostrips	 Distribution Blocks
--	---	---	--	--

Miscellaneous

 Ferrules	 Custom Assembly	 Marking & Engraving Systems	 Power Semi-conductors	 European Spare Parts
--	---	---	---	---



Altech Corporation
 35 Royal Road
 Flemington, NJ 08822-6000
 P 908.806.9400 | F 908.806.9490
 www.altechcorp.com

Altech Corp.® 725-032013-1M
 Printed April 2013

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Relay Sockets & Fixings](#) category:

Click to view products by [Altech](#) manufacturer:

Other Similar products are found below :

[00008258500](#) [00111976502](#) [0000-825-81-00](#) [60SY4S05](#) [M41G](#) [670-0125](#) [670-0127](#) [6700152](#) [670-0153](#) [6700156](#) [D258-2TS00](#) [70-309](#) [7-1393143-3](#) [7-1616360-5](#) [8000-DG2-5](#) [911361](#) [9-1616339-5](#) [PJF11N](#) [GDA12HA](#) [GDA12HD](#) [GDA12SA](#) [GDA12SD](#) [GDA16HD](#) [GDA22HA](#) [GDA95A](#) [GDA95D](#) [GFX20](#) [PT08QN](#) [PT 1/8 D = 3.2](#) [GUA1](#) [GUA2-11](#) [GUA4-04](#) [GUA4-31](#) [GUM5R](#) [GUR-277](#) [GURX-277](#) [GUW12](#) [GUW95](#) [GUZ63L](#) [R99-11 FOR MY\(NAMEPLATE\)](#) [D52PR2T](#) [RES100K](#) [1310H-HDC](#) [1390H-1ST](#) [1393824-3](#) [1390H-2PC](#) [1410-2SM](#) [1410-3SM](#) [1419106-5](#) [RMOB 1-24 JR](#)