

# VAF Series (Volt-Ampere-Frequency Meters)

## FEATURES

- Measurement Functions
  - 3  $\emptyset$  Voltage (True RMS)
  - 3  $\emptyset$  Current (True RMS)
  - Frequency
  - RPM
  - Run Hour
- Programmable CT Primary, PT Primary/Secondary




## CAT. NO.

## VAF36A-110V-CU

## VAF39A-110V-CU


<b>Display</b>		
Display Type	LCD Display with backlight	7 Segment LED Display
Digits	3 rows of 3 digits	3 rows of 3 digits
Bargraph	Bargraph for current percentage	-
Display Scrolling	Automatic/ Manual	Automatic/ Manual
<b>Supply Specification</b>	110 VAC +/- 20% (50/60Hz)	110 VAC +/- 20% (50/60Hz)
<b>Input Specification</b>		
Electrical Wire System	3 Phase (3/4 wires)	3 Phase (3/4 wires)
Input Voltage Range	11 ~ 300 VAC (Phase to Neutral) 19 ~ 519 VAC (Phase to Phase)	11 ~ 300 VAC (Phase to Neutral) 19 ~ 519 VAC (Phase to Phase)
Input Current Range	20mA ~ 6A (External CT required for current >5A)	20mA ~ 6A (External CT required for current >5A)
Frequency	45 ~ 65Hz	45 ~ 65Hz
<b>Parameter Resolution</b>		
Current	0.01, 0.1, 1 A/KA	0.01, 0.1, 1 A/KA
Voltage	0.1 V/KV	0.1 V/KV
RPM	0.1	0.1
Run Hour	0.1 hr (0~99999.9 hr)	0.1 hr (0~99999.9 hr)
<b>Accuracy Class</b>		
Voltage (L-N, L-L), Current	+/- 0.5% of Full-Scale Value, +/- 2 digits	+/- 0.5% of Full-Scale Value, +/- 2 digits
Average Voltage (L-N, L-L), Current	+/-0.5% of Full-Scale Value, +/- 2 digits	+/-0.5% of Full-Scale Value, +/- 2 digits
Frequency	0.1 Hz	0.1 Hz
RPM	+/- 0.5%	+/- 0.5%
Run Hour	+/- 1%	+/- 1%
<b>Output Specifications</b>		
Pulse Output	-	-
<b>Communication</b>	-	-
<b>Programmable Parameters</b>		
CT Primary	5A ~ 10,000A (Programmable for any value)	5A ~ 10,000A (Programmable for any value)
CT Secondary	5A fixed (External CT must be connected for current >5A)	5A fixed (External CT must be connected for current >5A)
PT Primary	100V ~ 500 kV (any value)	100V ~ 500 kV (any value)
PT Secondary	100V ~ 500 VAC (any value)	100V ~ 500 VAC (any value)
<b>Environmental Specifications</b>		
Temperature	Operating: -10°C~55°C, Storage: -20°C~ 75°C	Operating: -10°C~55°C, Storage: -20°C~ 75°C
Humidity	Up to 85% RH	Up to 85% RH
Protection Level	IP65 for Faceplate	IP65 for Faceplate
<b>Physical Specifications</b>		
Size	1/4 DIN, 96 mm x 96 mm	1/8 DIN, 48 mm x 96 mm
Weight	0.79 lbs (357g)	0.79 lbs (357g)
Terminal Size Acceptability and Torque	20-14 AWG (0.5 - 2.5mm <sup>2</sup> ), 6-7 lb-in. (0.68 - 0.79Nm)	20-14 AWG (0.5 - 2.5mm <sup>2</sup> ), 6-7 lb-in. (0.68 - 0.79Nm)

## DIMENSIONS

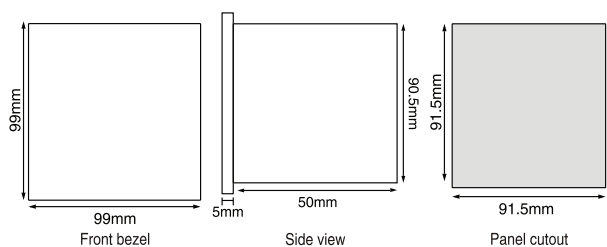

## VAF Series

## TERMINAL CONNECTIONS

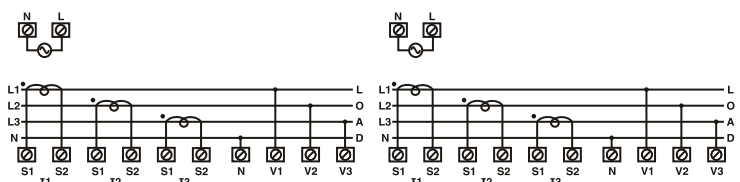

## VAF36A-110V-CU

## VAF39A-110V-CU

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Panel Meters](#) category:*

*Click to view products by [Altech](#) manufacturer:*

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [20046-20](#) [20182-23](#) [AP1021](#) [25.320.5053.0](#)  
[25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#)  
[28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [HB8280R2490](#) [HB8260R4890](#) [SCE016MD3MV0W10](#) [20125-21](#)  
[86640-00](#) [PG-100-103GP](#) [PG-100-102RP](#) [PG-100B-102R-H](#) [PG-100B-103R](#) [PG-100B-102R](#) [PG-100N-103R-W](#) [PG-100N-103R](#) [PG-100N-102R](#) [PG-100-102GH](#) [PG-100-103RP](#)