



# CERAMIC HEATSINK INTRODUCTION

---

# MPC Main Customer

---



ISO9001:2000 CERTIFIED


# MICRO POROUS CERAMIC HEAT SINK PRODUCT INFORMATION

---

- Production Process
- MPC Property-Natural Convection & Heat Radiation
- MPC Property-Low Thermal Capacity
- MPC Property-Heat Convection
- Heat Dissipation Ability Comparison Sheet
- Standard Size of Ceramic Heat Sink

# Production Process of Ceramic Heat Sink

---

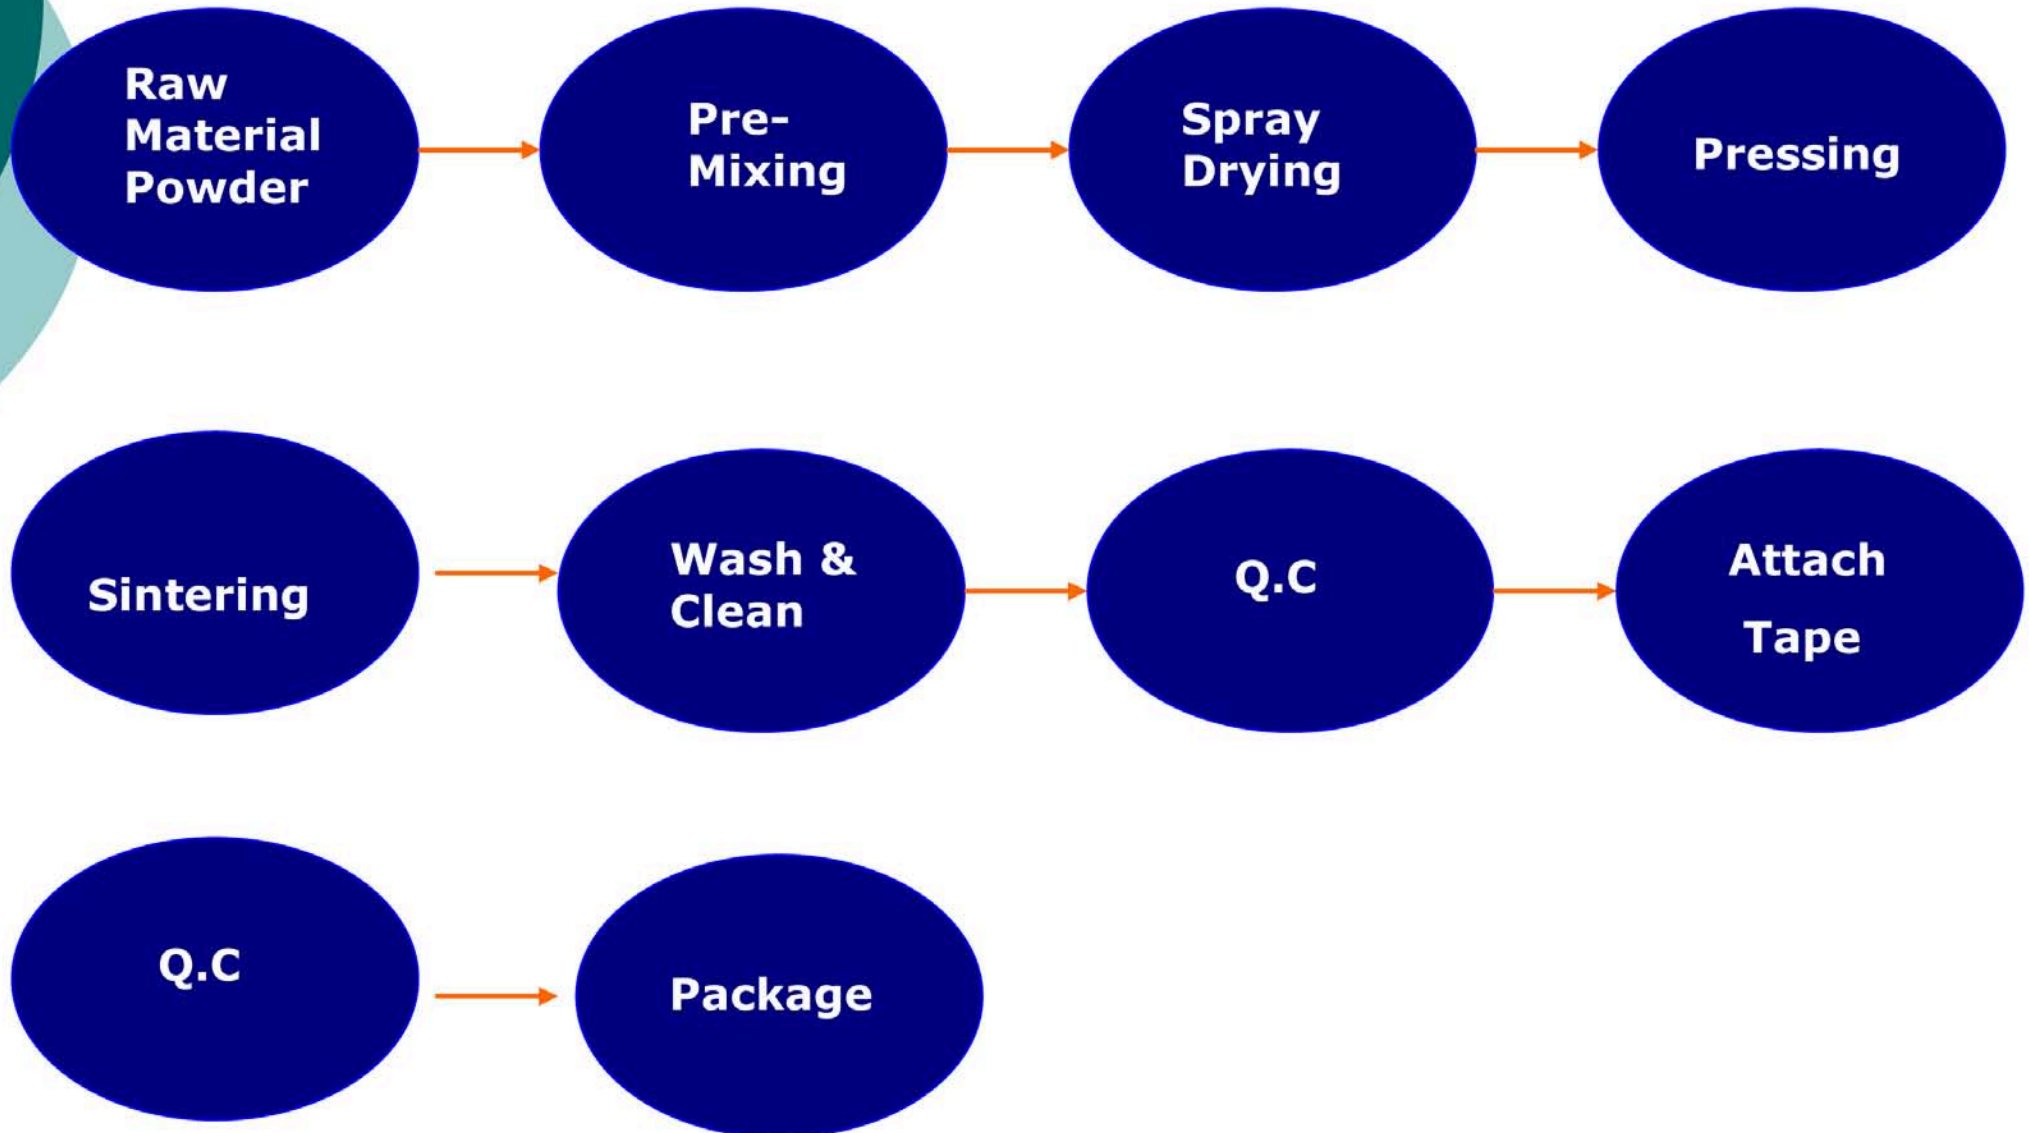


# MPC Property-Natural Convection & Heat Radiation

---


Using MPC as a heat sink, the MPC Structure provides very large surface area to contact air and has excellent property of Heat Dissipation and Heat Convection.

**General Structure  
Metal series**

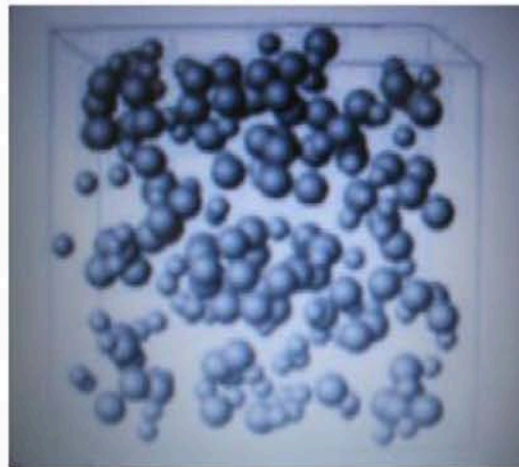

**Regular arrangement**

**Micro-Pores Structure**

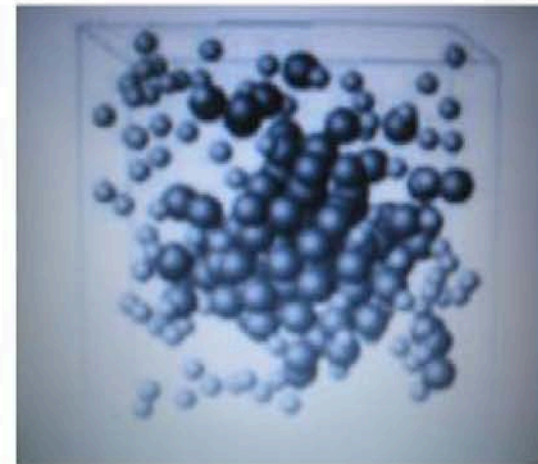

**Irregular arrangement**

# MPC Property-Low Thermal Capacity

- We utilize the ceramic with the property of high thermal dissipation and the low thermal capacity for heat sinking.

## Low Thermal Capacity:

In chart (1), it shows copper is the material with lowest thermal Capacity.

But in chart (2), we find the thermal capacity of copper is the highest than that of aluminum and MPC in term of unit volume. MPC is the lowest thermal capacity material in unit volume. **MPC dissipates heat faster than metal Heat Sink without storing heat within itself.**

	Density (g/cc)	Thermal conductivity (W/m-k)	Thermal capacity (J/g-°C)
Cu	8.96	385	0.385
Al	2.7	210	0.9
MPC	1.8	125	0.67

Chart(1)

	Volume (cm <sup>3</sup> )	Weight (g)	Thermal capacity of Unit volume
Cu	1	8.96	3.45
Al	1	2.7	2.43
MPC	1	1.8	1.206

Chart(2)

# MPC Property- Heat Convection

- **Heat Convection:**

The surface area of MPC is greater than the metal Heat Sink by about 30%. Hence, MPC has more surface area to contact air, the convection medium. MPC can dissipate more heat in a unit time. Test result as next page::



Test Equipment

Test Condition :

- Heater Type : Dummy Heater

- Heater Material: Copper

- Heater Size:30\*30\*8(mm)





- Convection Condition:

fanless, airless

- Conduction medium:

Thermal Grease (k=2)

# Heat Dissipation Ability Comparison Sheet

Material	Photo	Heat Sink Dimension	Water Temp	Thermal Resistance	Thermal Resistance Variation	Power of Heater	Ambient Temp
Without Heat Sink		-	86.44 °C	11.16°C/W	-	5.06 W	29.95 °C
MPC		30*30*2.5mm	82.14 °C	10.21°C/W	-11.9%	5.06 W	30.5 °C
Copper		30*30*2 mm	86.38 °C	11.09°C/W	-0.6%	5.06 W	30.26 °C
Aluminum		30*30*2 mm	85.3 °C	10.93°C/W	-2%	5.06 W	30 °C

Result: We find that MPC has better Heat Dissipation ability than metal Heat Sink in a natural convection environment



# MPC Application Introduction



Digital Photo



LED LCD TV



Set Top Box



Mother Board



Broadband



Media Player









Solar System



Power Adaptor

# S tandard Size of Ceramic Heat Sink

Product Dimension	Product Type	Product Photo	Application
10*10*2(mm)	Flat		Power IC ;High temperature IC component ; Power Adaptor
20*20*2.5(mm)	Flat		High temperature IC component; SATA Box ; Set Top Box ; Blue Ray player
30*30*2.5(mm)	Flat		LED ; Mother Board ; networking & communication ; LCD TV ; LED TV ; NB ;
40*40*2.5(mm)	Flat		LED ; Mother Board ; networking & communication ; LCD TV ; LED TV ; NB
30*30*5(mm)	Wave		LED ; Mother Board ; networking & communication ; LCD TV ; LED TV ; NB
40*40*5(mm)	Wave		LED ; Mother Board ; networking & communication ; LCD TV ; LED TV ; NB

# A pplication-LED & LCD TV GPU



Application : Samsung LED TV Series

Advantage : Low profile · Insulation



EMI Shelter · Heat Sinking

MPC Spec. : 40\*40\*5 Wave Type

30\*30\*5 Wave Type



# Test Report of LED TV

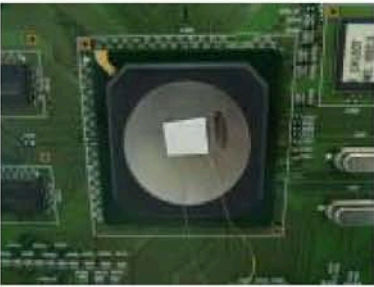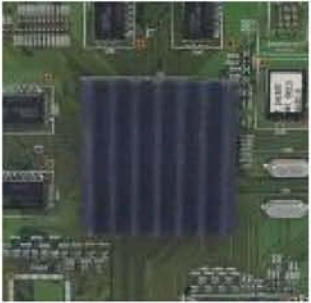Test sample	Without Heat Sink			40*40*5 Wave Type		
PHOTO:						
No	IC Temp(°C)	Room Temp(°C)	$\Delta T=IC-Room$	IC Temp(°C)	Room Temp(°C)	$\Delta T=IC-Room$
1	85.2	24.5	60.7	80.3	25.1	55.2
2	84.5	24.3	60.2	80.6	25.1	55.5
3	83.7	23.2	60.5	80.3	25.1	55.2
4	83.6	23.3	60.3	79.8	25	54.8
5	83.9	23.2	60.7	79.7	24.6	55.1
average	84.18	23.7	60.48	80.14	24.98	55.16

Remark : The ambient temperature inside LED TV is around 52 °C







Test Result : MPC can reduce 5.3°C = (60.48 - 55.16 )

Ceramic Heat Sink V.S Aluminum Heat Sink

IC : Power IC

IC Size : 20\*15(mm)

Test Date : 2010/4/21

Test sample	Without Heat Sink				Aluminum_Fin Type_30*30*8.6(mm)				MPC_Wave Type_30*30*5(mm)			
PHOTO: IC WITH Heat Sink												
	Power(W)	IC Temp(°C)	Room Temp(°C)	ΔT	Power(W)	IC Temp(°C)	Room Temp(°C)	ΔT	Power(W)	IC Temp(°C)	Room Temp(°C)	ΔT
	2W	109	22.6	86.4	2W	77	23	54	2W	77.7	23	54.7
Test sample	Without Heat Sink				Aluminum_Flat Type_30*30*2.5(mm)				MPC_Flat Type_30*30*2.5(mm)			
PHOTO: IC WITH Heat Sink												
	Power	IC Temp(°C)	Room Temp(°C)	ΔT	Power	IC Temp(°C)	Room Temp(°C)	ΔT@25°C	Power	IC Temp(°C)	Room Temp(°C)	ΔT
	2W	109	22.6	86.4	2W	83	23	60	2W	80.6	23.0	57.6

Test Result

Test Sample	ΔT	Reduce Temp(°C)
without H/S	86.4	
Al Fin Type_30*30*8.6(mm)	54	32.4
MPC_Wave Type_30*30*5(mm)	54.7	31.7
Aluminum_Flat Type_30*30*2.5(mm)	60	26.4
MPC_Flat Type_30*30*2.5(mm)	57.6	28.8

# Application - VGA Card

Ceramic H/S -090610


Test sample	W/O H/S(IC Temp.)		30*30*2.5 Flat (ABC)		40*40*2.5 Flat (ABC)		$\Delta T=IC-Ambient$	$\Delta T=IC-Ambient$	$\Delta T=IC-Ambient$
PHOTO: IC WITH Heat Sink									
No	IC	Ambient Temp	IC	Ambient Temp	IC	Ambient Temp	$\Delta T=IC-Ambient$ Without HeatSink	$\Delta T=IC-Ambient$ 30*30*2.5	$\Delta T=IC-Ambient$ 40*40*2.5
1	87.8	29.4	73.9	28.8	72.1	29.3	58.4	45.1	42.8
2	87.6	29.2	74.8	29.4	71.3	29.6	58.4	45.4	41.7
3	87.1	29.6	73.9	29.5	72.1	29.6	57.5	44.4	42.5
4	86.9	29.5	73.6	29.4	71.1	29.1	57.4	44.2	42.0
5	87.4	29.6	73	29.3	71.8	29.2	57.8	43.7	42.6
average	87.36	23.9	73.84	29.28	71.68	29.36	57.9	44.6	42.32

Test Condition:




1. Test Heater : VGA Card Series : NVIDIA G- FORCE2 400
2. Thermal meter-Company :Fuji Electric ; Name: FCR MicroJet ; Type : PHC6603-AAOYC

Result :		
Without Ceramic Heat Sink	Add 30*30*2.5 Ceramic Heat sink	Add 40*40*2.5 Ceramic Heat sink
$\Delta T=57.9^{\circ}C$	$\Delta T=44.6^{\circ}C$	$\Delta T=42.32^{\circ}C$
—	It can reduce 13.4 $^{\circ}C$	It can reduce 15.58 $^{\circ}C$

# A pplication-Mother Board Chip Set



Application : Mother Board Chip Set  
 Advantage : Low profile · Insulation  
 EMI Shelter · Heat Sinking  
 MPC Spec. : Flat Type 30\*30\*2.5(mm)

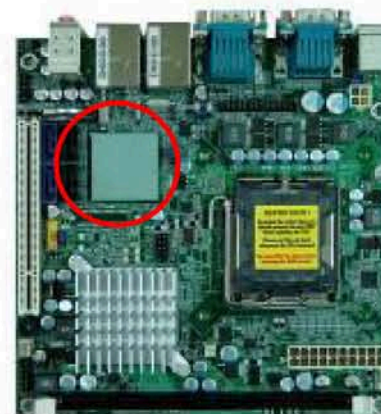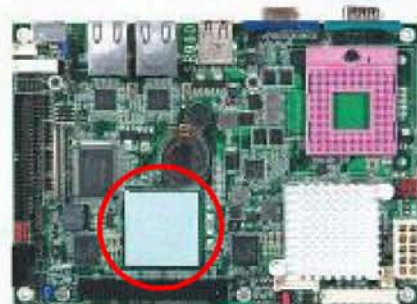

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [amec thermasol](#) manufacturer:*

Other Similar products are found below :

[W8TR500G-2.0](#) [FCTL73-15](#) [FCTS73-10N](#) [MPC303025T](#) [W8TR500G-0.5GF](#) [MHP-2550A-250A](#) [MPC101020T](#) [FCH30305T](#) [MPC151525T](#)  
[MPC202025T](#)