


Mechanical Specifications

D	22.0 mm Max
T	6.0 mm Max
Lead Diameter	1.0 mm Nom
S	7.8 mm Nom
L	38.0 mm Min
Straight Leads	Standard

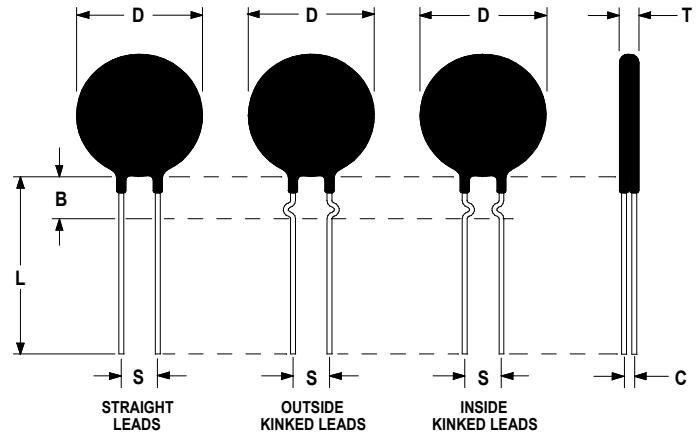

Electrical Specifications

Resistance @ 25°C	10.0 Ω ± 30%
Transition Temp	110 Deg C
Max voltage Rating	480 v rms
Switch Current @ 25°C	0.800A
Continuous Current @ 25°C	0.400A
Heat Capacity	2.0 Joules/°C
Dissipation Constant	22.50 mW/°C
Thermal Time Constant	65.0 seconds
Max Body Temperature @ Max voltage	174°C

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 702 884-0670
www.Ametherm.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PTC \(Positive Temperature Coefficient\) Thermistors](#) *category:*

Click to view products by [Ametherm](#) *manufacturer:*

Other Similar products are found below :

[PTCAUX7-36-5C](#) [PTCCL09H251FBE](#) [PTCTL3MR100GTE](#) [PTCCL05H630HTE](#) [B59346A1502P020](#) [PTCTT95R100GTE](#)
[PTCLL05P131TBE](#) [PTCCL09H541DBE](#) [TFPT0805L1800FV](#) [B59725T1120A062](#) [B59116S0225B010](#) [B59008C0150A040](#)
[B59100M1090A070](#) [B59100M1145A070](#) [B59300M1150A070](#) [B59339A1501P020](#) [B59770B0120A070](#) [B59985C0120A070](#)
[B59995C0120A070](#) [YQR100R060](#) [YQS5751PTO](#) [YQS5856PTF](#) [YQS5930PTO](#) [YS5675](#) [YS5918PTO](#) [YQS5898PTO](#) [YQS5868PTF](#)
[YQD100N1000](#) [KTY81/210,112](#) [B59010D1135B40](#) [B59606A110A62](#) [B59874C120A70](#) [B59960C160A70](#) [YQD120N0025](#)
[PTGL12AR270M9C01B0](#) [PTGL12AR100M6C01B0](#) [PTGL07AS2R7K2B51A0](#) [PTGL07AS1R8K2B51B0](#) [PTGL10AR3R9M3P51B0](#)
[PTGL07BD220N3B51B0](#) [PTGL07AS5R6K4B51B0](#) [PTGL07AS150K6B51A0](#) [PTGL07AR8R2M3P51B0](#) [PTGL07AR560M9A51B0](#)
[PTFL04BD471Q2N34B0](#) [PRG21BC3R3MM1RA](#) [PRG21BC1R0MM1RA](#) [PRG21BC0R2MM1RA](#) [PRG21BB220MB1RK](#)
[PRG21BB150MB1RK](#)