


Part Number: MCL20 500100-A
(APC P/N 160-0064-Z) Rev-I

RoHS Compliant

Ordering Different Lead Types:

Inside Kinked Leads	Use-A after Ametherm's part #
Outside Kinked Leads	Use-B after Ametherm's part #

For Example: to order an inside kinked lead use part number MCL20 500100-A

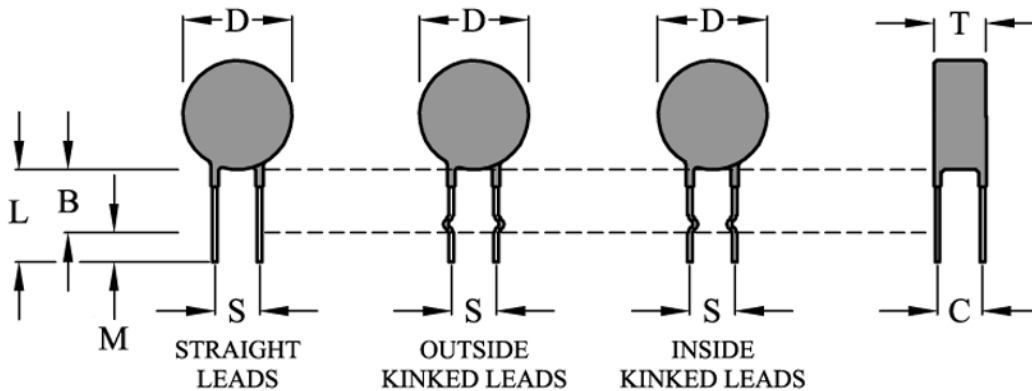

Electrical Specifications

Resistance @ 25° C	50 Ω +20% /-50%
Minimum Switching Current @ 25°C	0.40 A
Max Continuous Current @ 70°C	0.25 A
Max Voltage Rating	680 VRMS
Maximum Inrush Current @ Max Peak Voltage of 680 x 1.414 = 962 V	20.0 Amp
Heat Capacity	5.45 Joules/ °C
Dissipation Constant	55.0 mW/°C
Thermal Time Constant	62 seconds
Switch Temperature	100°C ± 8°C
Operating Temperature	- 50 °C to 150 °C
Storage Temperature	- 50 °C to 120 °C
Leads are copper with nickel underlay and tin plating	
Flammability rating: meets UL94-V0 standard	

Manufacturing Note:

The PTC tends to drop in resistance when exposed to High voltage (> 400VRMS). In addition high temperature wave solder would also cause, the drop in resistance temporarily.

Mechanical Specifications

D	19.0 mm ± 7% (20.33 mm Max.)
T	9.0 mm Max.
Lead Diameter	1.0 mm ± 0.1 mm
S	7.8 mm Nom.
L	16.0 mm Nom.
M	5 mm ± 1.0 mm
B	11.0 mm Nom.

Rev.	Date	Description
A	07/02/07	Dissipation constant changed from 11 mW/°C to 55.0 mW/°C. Heat capacity changed from 3.0 J/°C to 5.45 J/°C
B	07/05/07	Dimension C changed from 3.6 mm to 11.0 mm
C	07/10/07	Added Operating and storage temp., lead material and flammability rating.
D	07/12/07	Dimension T changed from 12.0 mm to 9.0 mm max
E	07/20/07	Dimension B corrected to 12.0 mm Nom., lead spacing changed to 7.8 mm Nom.
F	07/30/07	"T" Dimension changed to 18 mm form 38 mm.
G	07/30/07	"D" Added tolerance and Max Dia
H	08/17/07	Added "M" Dimension & Tolerance
I	02-04-08	Revised the tolerance in resistance to +20%, -50%.

Revision Date: February 5, 2008

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701

Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

www.ametherm.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PTC \(Positive Temperature Coefficient\) Thermistors](#) *category:*

Click to view products by [Ametherm](#) *manufacturer:*

Other Similar products are found below :

[PTCAUX7-36-5C](#) [PTCCL09H251FBE](#) [PTCTL3MR100GTE](#) [PTCCL05H630HTE](#) [B59346A1502P020](#) [PTCTT95R100GTE](#)
[PTCLL05P131TBE](#) [PTCCL09H541DBE](#) [TFPT0805L1800FV](#) [B59725T1120A062](#) [B59008C0150A040](#) [B59100M1090A070](#)
[B59100M1145A070](#) [B59300M1150A070](#) [B59339A1501P020](#) [B59985C0120A070](#) [B59995C0120A070](#) [YQR100R060](#) [YQS5751PTO](#)
[YQS5856PTF](#) [YQS5930PTO](#) [YS5675](#) [YS5918PTO](#) [YQS5898PTO](#) [YQS5868PTF](#) [YQD100N1000](#) [KTY81/210,112](#) [B59010D1135B40](#)
[B59606A110A62](#) [B59807A90A62](#) [B59874C120A70](#) [B59960C160A70](#) [YQD120N0025](#) [PTGL12AR270M9C01B0](#) [PTGL12AR100M6C01B0](#)
[PTGL07AS2R7K2B51A0](#) [PTGL07AS1R8K2B51B0](#) [PTGL10AR3R9M3P51B0](#) [PTGL07BD220N3B51B0](#) [PTGL07AS150K6B51A0](#)
[PTGL07AR8R2M3P51B0](#) [PTGL07AR560M9A51B0](#) [PTFL04BG471Q2N34B0](#) [PTFL04BD471Q2N34B0](#) [PRG21BC3R3MM1RA](#)
[PRG21BC1R0MM1RA](#) [PRG21BC0R2MM1RA](#) [PRG21BB220MB1RK](#) [PRG21BB150MB1RK](#) [PRG21AR220MS1RK](#)