

AMC Product Series

Amphenol Micro Coaxial Products



Overview

Amphenol Micro Coaxial (AMC) connectors are low profile (2.5mm mating height) with an extremely small footprint (3mm x 3mm). Their space-saving design makes these connectors and optimal solution for portable and mobile devices. AMC connectors are fully compatible with the Hirose U.FL series.

Standard AMC Jumper Cables are available and in stock at many of the most common distributors. These jumpers offer an AMC right angle plug to AMC right angle plug on industry standard black 0.81mm, 1.13mm, 1.32mm, and 1.37mm Micro-Coaxial Cable. Custom solutions available upon request.

Features and Benefits

- Supports high frequency transmission from DC to 6GHz
- Ideal for applications where space and weight are a concern
- Easy snap on/off mating
- Surface mount allows for higher PC board densities and automated pcb placement

Applications

- Antennas
- Bluetooth
- GPS
- WLAN
- Cellular and Mobile Devices
- Tablets and Notebook Computers

Amphenol RF

Four Old Newtown Road Danbury, CT 06810

Ordering Information


AMC PCB Connectors

Part Number	Part Description
A-1JB	AMC Straight PCB Jack, Surface Mount, 3000 Piece Reel, 50 Ohms

AMC Adapters

Part Number	Part Description	
031-6101	MC Plug to TNC RP Jack, Panel Mount, 6GHz, 50 ohm	
031-6101-1	AMC Plug to TNC RP Jack, Panel Mount, 3GHz, 50 ohm	
031-6109	AMC Plug to BNC RP Jack, Bulkhead, 50 ohm	
031-6112	AMC Plug to TNC RP Jack, Bulkhead, 50 ohm	
031-6137	AMC Plug to TNC RP Jack, Panel Mount, 50 ohm	
031-6208	AMC Plug to TNC Jack, Bulkhead, 50 ohm	
901-10097	AMC Plug to SMA RP Jack, Bulkhead, 50 ohm	
901-10175	AMC Plug to SMA Jack, Bulkhead, 50 ohm	
901-10395	SMA RP Jack to AMC Jack, Bulkhead, 50 ohm	

AMC Jumper Assemblies

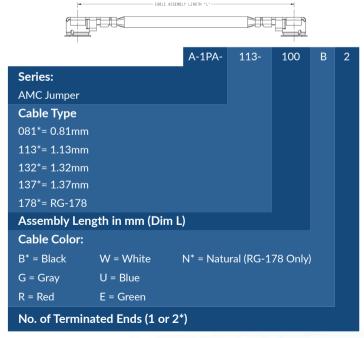

* standard configuration options



Technical Specifications

Electrical

	AMC PCB Mount Connectors	AMC Jumpers	
Impedance	50Ω, nominal		
Frequency Range	DC - 6 GHz		
Contact Resistance	Center Contact: 20 mΩ Max.		
	Outer Contact: 10 mΩ Max.		
Insulation Resistance	500 mΩ Min.		
Operating Voltage	500 VRMS		
DWV	No line or insulation breakdown: 200 VAC for 1 Min		
VSWR	1.3 Max. at DC - 3 GHz, 1.35 Max. at 3 - 6 GHz	1.300 Max. at DC - 3 GHz, 1.400 Max. at 3 - 6 GHz	

Mechanical

Durability	30 cycles	
Temperature Range	-40° to +90°C	
Mating	Demating Force 10N Typical – 20N Max	

Materials and Finishes

Connector Body	Phosphor bronze, silver plated (0.76u Min.) over copper (1u Min.)		
Connector Center Contact	Phosphor bronze, gold plated (0.2u min.) over nickel (2-3u)	Phosphor bronze, gold plated (0.076u min.) over nickel (2u Min)	
Connector Insulator	PBT		
Cable Jacket	FEP		
Cable Dielectric	FEP		
Cable Center Conductor	Annealed copper wire stranded, silver plated		
Cable Outer Conductor	Annealed copper wire braid, tin plated		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - Between Series category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

5945-9503-000 MCX/F-SMA/M R192417010 ADBJ20-E1-BJ379 ADM2 ADPL75-A1-PL75 242191 9317505 AD130 ADBJ20-E1-PL74 ADBJ77-E1-UPL20 ADRMF370 242190 242215 242228 R125680000W R192430000 UAD95 1057367-1 8311505 R114704000 R451034500 R451030500 R451543000 HDVDPN ADBJ20-K1-PL20 R451570000 R192419000 R451034000 J9 J3WE-5 R451032500 242201RP 17K132-K00S5 03K719-S22S3 AD-RSMAF-RTNC 53K156-K00N5 53K160-KIMN1 02K119-K00E3 29S132-K01N5 53S156-K00N5 02S119-S00E3 28K132-K00N5 02S109-K00S3 27-8200TP 242235 ADBJ20-E1-BJ89 ADP-SMAF-MMCXM 000-2900 321-102-003 (SMA-50/2-H155/W1.03 AU)