
	5	4	/ +		3	2
D	NOTES: 1. MATERIALS AND FINISHES: BODY - BRASS, GOLD PLATING CONTACT - BERYLLIUM COPPER, GOLD PLATI INSULATOR - PTFE 2. ELECTRICAL: A. IMPEDANCE: 50 OHM 4. PACKAGING: A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED "AMPHENOL, 95-700-38-XXXX, AND DATE					REV A RELEASE
			LENGTH 'L' (SEE TABLE)			
C	INTERFACE PER MIL-STD-348 SERIES: SMB PLUG TYP (2)					25.4 [
В			9 9 9 9	95-700-38-012       95-700-38-016       95-700-38-018          95-700-38-024          95-700-38-036          95-700-38-036          95-700-38-048          95-700-38-048	6.00 [0.152           00-38-M025         9.842 [0.250            12.00 [0.305            16.00 [0.406            18.00 [0.457           00-38-M050         19.685 [0.500            24.00 [0.610           00-38-M075         29.528 [0.75            36.00 [0.914           00-38-M100         39.370 [1.000            48.00 [1.219           00-38-M125         49.213 [1.250           00-38-M150         59.055 [1.500	D]     24.00" - 5       D]     0" - 5       D]     0       D]     0       D]     0       O]     0       O]     0       O]     0       O]     0       O]     0
	DESIGN REQUIREMENTS X FREQUENCY: DC TO 4 GHz X CON	TINUITY	9	25-700-38-060 25-700-38-072 95-70 95-70 PART NUMBER PAR	60.00 [1.524            72.00 [1.829           00-38-M200         78.740 [2.00           00-38-M300         118.11 [3.000           RT_NUMBER         LENGTH 'L'	+] ] 0] ] 
A	VSW R: :1 MAX X HI-F INS. LOSS: dB MAX OTH NOTICE: These drawings. specifications. or other data (1) are. and (2) must be returned upon request; and (3) are confidential and not than those to whom they are given by Amphenol Corp. The furnishin or other data by Amphenol Corp or to any other person to anyone regarded by implication or otherwise in any manner licensing, grant or any other person to manufacture. use or sell any product, proces that may in any way be related to or disclosed by said drawings. s	POT: 750 VRMS ER to be disclosed to any person other g of these drawings, specifications, for any purpose is not to be ing rights to permitting such holder s or design, patented or otherwise.	>0.5 - 6mm = ±0.1mm [: >6.00 - 30mm = ±0.2mm [: >30.00 - 120mm - ±0.3mm [:	SE SPECIFIED IES] AND TOLERANCES ARE: <0.020 = ±0.002] >0.020 - 0.236 = ±0.004] >0.236 - 1.181 = ±0.008] 1181 - ↓ 725 = ±0.012]	METRIC) IN INCHES [MET	EUST A SMB PLUG TO SMB I ON RG-58 CABLE VARIOUS LENGTHS
	That may in any way be related to or disclosed by said drawings, s         THIRD ANGLE PROJ.         5	EAR# 10627			ENGINEER DATE C.CROTTY 26-APF	

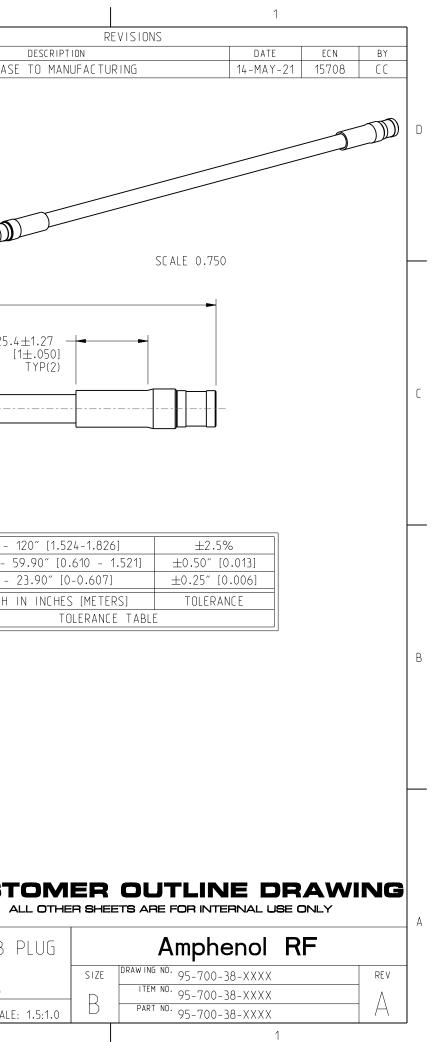

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below :

 73-6352-10
 73-6353-3
 R285001001
 R288940004
 145111-05-12.00
 1661-C-24
 1801171170914KE
 24P104C24J1-012
 24P104C24P1-006

 24P104C24P1-018
 24P204C24J1-003
 172-2150-EX
 FCB-3030-ALT
 21117-046
 21117-050
 PCX-24-50
 24P103C24P2-003
 25P203C25P2 

 003
 R284008001
 R285001021
 R285426000
 R288940003
 4814-BB-24
 5260-72
 JT2N1-CL1-1F
 DLP-COAX1
 4814-K-48
 115101-09-06.00

 CCNTN2-MM-LL335-26
 73-6351-25
 73-6352-3
 73-6353-25
 1800920920610PJ
 GD0BQ0BQ024.0
 1-3636-600-5210
 TL8A-11SMA 

 11SMA-01500-51
 R284C0351060
 R288940009
 R284C0351028
 R288940002
 9702-1SL-1
 PT82NSMA
 73-6353-10
 R285020301W
 PCX 

 18-50
 Minibend-9
 Minibend-4
 BNC TO SMA Cable
 MIKROE-274
 Minibend-10
 Minibend-10