


# Universal Contact

## OVERVIEW

The single spring contact to connect the designed device, such as an antenna to a printed circuit board assembly, this makes it easier for customers to design the board. Single position connector provides a means to electrically connect a device.

The single position spring contact is an excellent means to electrically connect devices, such as an antenna to a printed circuit board assembly, giving customers high flexibility to design the board.

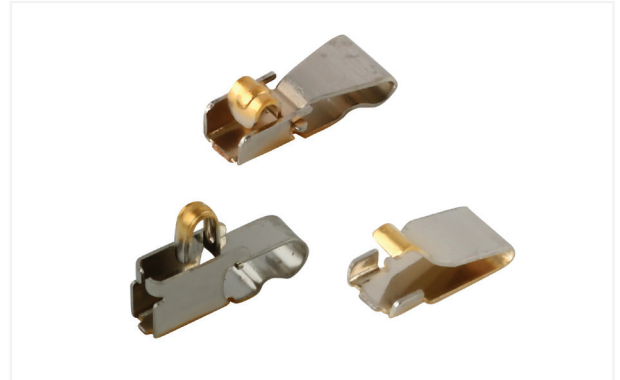

## FEATURES

- In accordance with FCI GS-12-500
- Single contact without housing is helpful for customer to make the device thinner
- Various contact height allows customer to design various operation height

## BENEFITS

- Domed contact points for good normal force and low contact resistance
- Solderwell design prevents solder wicking up the contact
- Freedom to position part – no fixed mating interface





## TECHNICAL INFORMATION

### MATERIALS

- Beryllium/Titanium Copper Alloy
- Contact Area: 40u" Gold or 40u" GXT over Nickel
- Solder Area: Gold Flash over Nickel

### ELECTRICAL PERFORMANCES

- Rated Voltage: Maximum 12V
- Rated Current: 2 Amps @ 30 °C
- Contact Resistance: 20 Milliohms Maximum

### ENVIRONMENTAL

- Operating Temperature Range: - 40 °C to + 85 °C without loss of function
- Storage Temperature Range: - 40 °C to + 85 °C without loss of function at operating temperatures

### MECHANICAL PERFORMANCES

#### Universal Contacts

Part Number	Spring Height (mm)	Pre-load Apply Load (N)	Pre-load Un-Applying Load (N)	Max Deflection (mm)	Minimal Normal Force @ max Deflection (N)	Spring Rate (N/mm)
10123973-00*RLF	1.2	-	-	0.65	0.6	0.92
10094594-00*RLF	1.3	0.78	0.58	0.32	0.87	1.2
10104320-00*RLF	1.3	0.41	0.36	0.4	0.7	1.5
10115748-00*RLF	1.55	0.44	0.26	0.6	0.73	0.78
10103955-00*RLF	1.8	0.35	0.15	0.8	0.75	0.74
10128200-00*RLF	2.1	0.5	0.36	0.45	0.6	0.67
10104319-00*RLF	2.5	0.42	0.31	1	0.54	0.32
10104321-00*RLF	3.5	0.56	0.38	1.3	1.02	0.49

### SPECIFICATIONS

- GS-12-500

### PACKAGING

- Reel & Tape

### TARGET MARKETS/APPLICATIONS

- Consumer
  - Smartphone
  - Wearable Device
  - Gaming Device
  - Tablet
- Industrial & Instrumentation
  - LED lighting
  - Switch

## PART NUMBERS

40u" Gold Plating	40u" GXT Plating
XXXXXXXX-001RLF	XXXXXXXX-009RLF

FFCUNICON0315EA4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Board Hardware - PCB category](#):*

*Click to view products by [Amphenol manufacturer](#):*

Other Similar products are found below :

[8919-0-00-15-00-00-03-0](#) [0135-0-15-01-30-27-04-0](#) [5970-1-15-01-32-14-04-0](#) [0149-0-15-15-30-27-04-0](#) [MBI 1 BLUE](#) [7305-0-15-15-47-14-10-0](#) [MLN 150/1 BLACK](#) [8579-0-15-80-11-27-10-0](#) [8579-1-15-15-11-27-10-0](#) [8830-0-15-01-22-14-10-0](#) [8836-0-00-21-00-00-03-0](#) [PRUEF 2 RED](#) [9976-0-00-00-00-00-03-0](#) [PW1616](#) [1215-3-05-00-00-00-01-0](#) [1231](#) [1303-0-15-15-47-14-04-0](#) [1404-3](#) [1404-4](#) [1406-4](#) [1407-3](#) [1406-3](#) [1407-4](#) [1408-3](#) [1424-4](#) [1427-3](#) [1419-4](#) [1426-4](#) [1548-103](#) [1938-0-00-00-00-00-03-0](#) [1942-0-00-00-00-00-03-0](#) [2101-3-00-44-00-00-07-0](#) [2108-2-00-50-00-00-07-0](#) [2109-2-00-44-00-00-07-0](#) [2110-2-00-44-00-00-07-0](#) [2111-2-00-00-00-00-07-0](#) [2113-4-00-44-00-00-07-0](#) [2301-3-00-44-00-00-07-0](#) [2308-1-00-50-00-00-07-0](#) [2313-2-00-00-00-00-07-0](#) [2315-2-01-44-00-00-07-0](#) [2333-1-00-50-00-00-07-0](#) [9000-0-00-00-00-00-03-0](#) [2506-2-00-50-00-00-07-0](#) [2507-2-01-44-00-00-07-0](#) [2508-2-00-44-00-00-07-0](#) [2561-2-00-44-00-00-07-0](#) [9220](#) [9234-0-15-15-30-14-10-0](#) [LAS S G BLACK](#)