


Cross Section at Flat

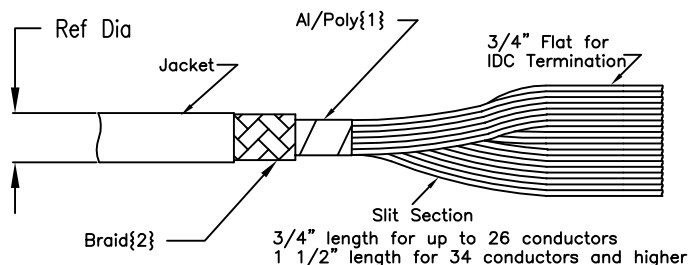

Part Number	Count	A Span, Inches(mm)	B Span, Inches(mm)	Ref Dia
159-2801-009	9	.450(11,43) Nom	.400 ±0.007(10,16±0,18)	.270
159-2801-010	10	.500(12,70) Nom	.450 ±0.007(11,43±0,18)	.270
159-2801-014	14	.700(17,78) Nom	.650 ±0.007(16,51±0,18)	.290
159-2801-015	15	.750(19,05) Nom	.700 ±0.011(17,78±0,28)	.300
159-2801-016	16	.800(20,32) Nom	.750 ±0.011(19,05±0,28)	.310
159-2801-020	20	1.000(25,40) Nom	.950 ±0.011(24,13±0,28)	.330
159-2801-024	24	1.200(30,48) Nom	1.150 ±0.011(29,21±0,28)	.350
159-2801-025	25	1.250(31,75) Nom	1.200 ±0.011(30,48±0,28)	.360
159-2801-026	26	1.300(33,02) Nom	1.250 ±0.011(31,75±0,28)	.360
159-2801-034	34	1.700(43,18) Nom	1.650 ±0.011(41,91±0,28)	.400
159-2801-036	36	1.800(45,72) Nom	1.750 ±0.015(44,45±0,38)	.410
159-2801-037	37	1.850(46,99) Nom	1.800 ±0.015(45,72±0,38)	.410
159-2801-040	40	2.000(50,80) Nom	1.950 ±0.015(49,53±0,38)	.430
159-2801-050	50	2.500(63,50) Nom	2.450 ±0.015(62,23±0,38)	.480
159-2801-060	60	3.000(76,20) Nom	2.950 ±0.015(74,93±0,38)	.520
159-2801-064	64	3.200(81,28) Nom	3.150 ±0.015(80,01±0,38)	.530

PHYSICAL

CONDUCTORS: 28 AWG 7/36 Tinned Copper  
 INSULATION: .010" Gray PVC with Red Edge  
 SHIELD{1}: .001" Aluminum /Polyester Tape (SPIRAL WRAP)  
 SHIELD{2}: 85% Minimum coverage Tinned Copper Braid  
 JACKET: .030" Black PVC  
 TEMP. RATING: -40°C TO 105°C

ELECTRICAL

IMPEDANCE: 75 Ohms  
 CAPACITANCE: 24 pF/ft @1MHz NOM  
 CURRENT RATING: 1.3 A @ 10°C Rise Above Ambient  
 VOLTAGE RATING: 300 V  
 INSULATION RES: 10<sup>10</sup> Ohms per 10 ft minimum

APPROVALS: UL Listed Type CL2  
 CSA Certified AWM FT-1

Above Values Calculated in the Ground-Signal-Ground with Shield also Grounded.

Shielding Variations: -1XX Foil Only; -2XX No Shield with Polyester Wrap.

Note: Reference Diameters are .030" to .040" smaller

All Dimensions in Inches Unless Otherwise Noted.

REVISION	CHANGES	ECO	DATE
M	UPDATE TEMP RATING TO FULL CAPABILITY	7888	3/28/14
L	ADD -40C LOW TEMP. AND REMOVE PAPER LINER	7681	5/16/13

DRAWN BY FITTS 2/20/01	REVIEWED	APPROVED	DOCUMENT NO. 159-2801-0XX	<b>AMPHENOL SPECTRA-STRIP</b> 720 SHERMAN AVENUE TEL (203) 281-3200 HAMDEN CT 06514 FAX (203) 281-5872	Rev M SHEET <b>1 OF 1</b>
			TITLE: Round 'N' Flat® Shielded and Jacketed Cable		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Flat Cables](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[F28-A25G](#) [F28-A34G](#) [F28-A36G](#) [FST-23A-15](#) [AYT1510-US](#) [171-37G](#) [C336514-500](#) [902220736002000](#) [902220736006000](#) [28100-0614](#)  
[9L28010-008-H300](#) [9L28014-008-H300](#) [F28-A24G](#) [F28-A60G](#) [25WDY00002](#) [28100-0571](#) [28100-0602](#) [28100-0650](#) [28100-0664](#) [336506-](#)  
[100SF](#) [336512-300](#) [336518](#) [336537-CUT-LENGTH](#) [3447/10-100](#) [362514100MSF](#) [40WDY00005](#) [AYT51163](#) [336506-300](#) [C3302/16](#)  
[C374910](#) [3749/10-100](#) [375630](#) [3-971111-6](#) [1-1437356-3](#) [812504](#) [20WDY00001](#) [5-1437214-8](#) [3355/15](#) [40WBY00007](#) [3609/12](#) [5111196336](#)  
[607.5689.087](#) [607.5689.091](#) [3801/04](#) [8124/04](#) [3801/12](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#) [C3811/10-100](#)