


NOTES:

1. MATERIALS AND FINISHES:
 N STR SOLDER PLUG - BRASS, WHITE BRONZE PLATING
 CABLE - 0.085 SEMI-RIGID HAND CONFORMABLE
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
3. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 175101-RI-XX.XX AND DATE CODE".


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	--
B	FORMAT UPDATED, 18.00" & METRIC LENGTHS ADDED	03-Oct-16	2004	VK

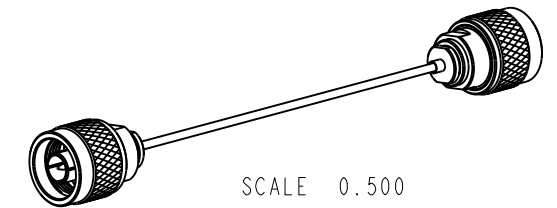

LENGTH 'L' (SEE TABLE)

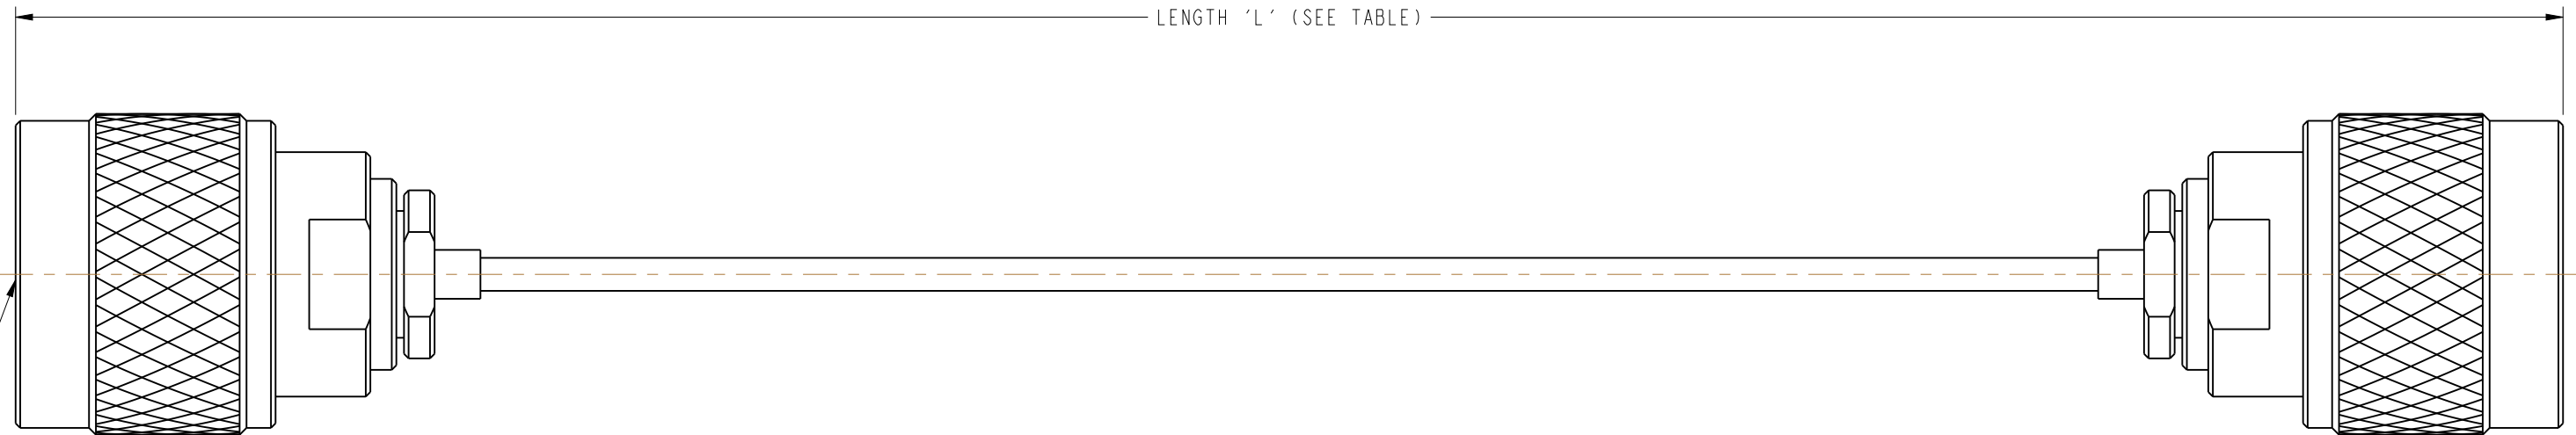

INTERFACE PER
 MIL-STD-348
 SERIES: N PLUG
 TYP(2)

LENGTH TABLE		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [METERS]
175101-RI-06.00	-	6.00 [0.152]
-	175101-RI-M0.25	9.84 [0.250]
175101-RI-12.00	-	12.00 [0.305]
175101-RI-18.00	-	18.00 [0.457]
-	175101-RI-M0.50	19.69 [0.500]
175101-RI-24.00	-	24.00 [0.610]
-	175101-RI-M0.75	29.53 [0.750]
175101-RI-36.00	-	36.00 [0.914]
-	175101-RI-M1.00	39.37 [1.000]
175101-RI-48.00	-	48.00 [1.219]
-	175101-RI-M2.00	78.74 [2.000]
-	175101-RI-M4.00	157.48 [4.000]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

- FREQUENCY: ____ TO ____ GHz CONTINUITY
- VSWR ____ : 1 MAX HI-POT: 500 VRMS
- INS. LOSS: ____ dB MAX OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES
 ±.015 (0.381 mm) ±.005 (0.127 mm) ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL SEE NOTES	DRAWN VIJI K	DATE 04-Jul-16	TITLE N STR SOLDER PLUG TO N STR SOLDER PLUG, USING 0.085 SEMI-RIGID HAND CONFORMABLE CABLE, VARIOUS LENGTH		Amphenol RF www.amphenolrf.com
REFERENCE EAR # 7307	ENGINEER GOPI M	DATE 27-Jan-12	DRAWING NO. 175101-RI-XX-XX		
CONFIGURATION LEVEL: In Work	APPROVED K.CAPOZZI	DATE 03-Oct-16	SCALE: 2.3:1.0	SHEET 2 OF 2	ITEM NO. 175101-RI-XX-XX
FINISH	CAD FILE		DWG SIZE B	REV B	PART NO. 175101-RI-XX-XX

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)