




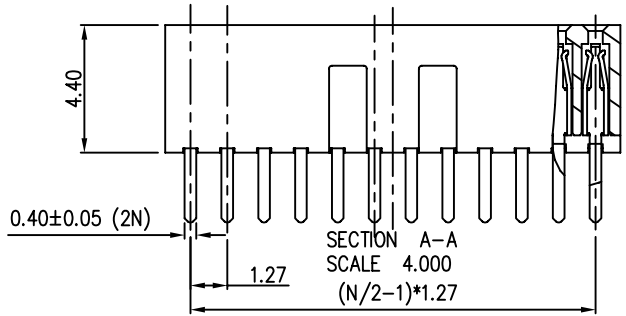


PART NO.
20021311

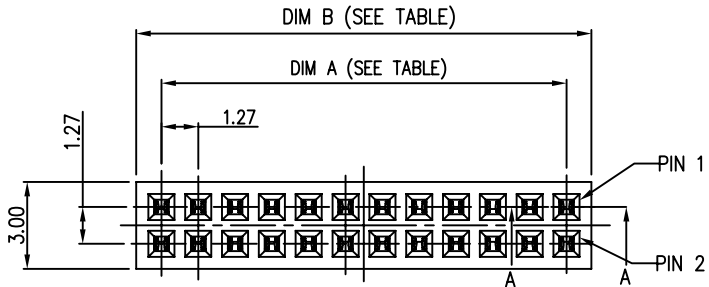

SCALE 3.000

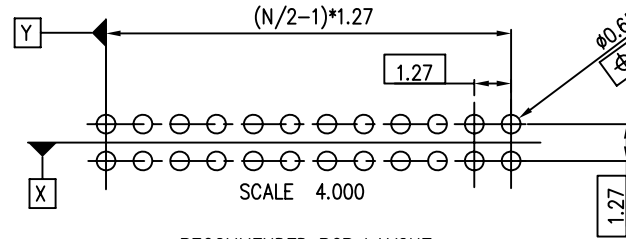

RECOMMENDED PCB LAYOUT
LAYOUT TOLERANCE= ±0.05mm

mat'l. code			surface		tolerance	projection		product family	
ltr			ecn no	dr	date	ISO 1302 ✓	ISO 406	ISO 1101	MINITEK127®
E			ELX-N-23548	TIM	03/21/16	tolerances unless otherwise specified		title	
						angles	.0±.30	mm	RECEPTACLE VT TH
						linear	.00±.20		
						0°±2'	.000±.10	scale 1:1	
						dr	ANDY ZHANG	10/29/12	dwg no
						eng	ANDY ZHANG	10/29/12	sheet 1 of 3
						chr	BIAN RICK	10/29/12	20021311
						app	BIAN RICK	10/29/12	A3
sheet index		revision sheet	E 1	E 2	E 3	type Product Customer Drawing			

TABLE 1

PRODUCT NO.	POSITIONS	DIM. A	DIM. B
20021311-XXX06XXLF	2 X 3	2.54	4.27
20021311-XXX08XXLF	2 X 4	3.81	5.54
20021311-XXX10XXLF	2 X 5	5.08	6.81
20021311-XXX12XXLF	2 X 6	6.35	8.08
20021311-XXX14XXLF	2 X 7	7.62	9.35
20021311-XXX16XXLF	2 X 8	8.89	10.62
20021311-XXX18XXLF	2 X 9	10.16	11.89
20021311-XXX20XXLF	2 X 10	11.43	13.16
20021311-XXX22XXLF	2 X 11	12.7	14.43
20021311-XXX24XXLF	2 X 12	13.97	15.7
20021311-XXX26XXLF	2 X 13	15.24	16.97
20021311-XXX28XXLF	2 X 14	16.51	18.24
20021311-XXX30XXLF	2 X 15	17.78	19.51
20021311-XXX32XXLF	2 X 16	19.05	20.78
20021311-XXX34XXLF	2 X 17	20.32	22.05
20021311-XXX36XXLF	2 X 18	21.59	23.32
20021311-XXX38XXLF	2 X 19	22.86	24.59
20021311-XXX40XXLF	2 X 20	24.13	25.86
20021311-XXX42XXLF	2 X 21	25.4	27.13
20021311-XXX44XXLF	2 X 22	26.67	28.4
20021311-XXX46XXLF	2 X 23	27.94	29.67
20021311-XXX48XXLF	2 X 24	29.21	30.94
20021311-XXX50XXLF	2 X 25	30.48	32.21
20021311-XXX52XXLF	2 X 26	31.75	33.48
20021311-XXX54XXLF	2 X 27	33.02	34.75
20021311-XXX56XXLF	2 X 28	34.29	36.02
20021311-XXX58XXLF	2 X 29	35.56	37.29
20021311-XXX60XXLF	2 X 30	36.83	38.56
20021311-XXX62XXLF	2 X 31	38.1	39.83
20021311-XXX64XXLF	2 X 32	39.37	41.1
20021311-XXX66XXLF	2 X 33	40.64	42.37
20021311-XXX66XXLF	2 X 34	41.91	43.64

PRODUCT NO.	POSITIONS	DIM. A	DIM. B
20021311-XXX70XXLF	2 X 35	43.18	44.91
20021311-XXX72XXLF	2 X 36	44.45	46.18
20021311-XXX74XXLF	2 X 37	45.72	47.45
20021311-XXX76XXLF	2 X 38	46.99	48.72
20021311-XXX78XXLF	2 X 39	48.26	49.99
20021311-XXX80XXLF	2 X 40	49.53	51.26
20021311-XXX82XXLF	2 X 41	50.8	52.53
20021311-XXX84XXLF	2 X 42	52.07	53.8
20021311-XXX86XXLF	2 X 43	53.34	55.07
20021311-XXX88XXLF	2 X 44	54.61	56.34
20021311-XXX90XXLF	2 X 45	55.88	57.61
20021311-XXX92XXLF	2 X 46	57.15	58.88
20021311-XXX94XXLF	2 X 47	58.42	60.15
20021311-XXX96XXLF	2 X 48	59.69	61.42
20021311-XXX98XXLF	2 X 49	60.96	62.69
20021311-XXXA0XXLF	2 X 50	62.23	63.96

Amphenol FCI

© 2016 AFCI

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101	MINITEK127®	
tolerances unless otherwise specified					title
E		angles	.0±.30	mm	RECEPTACLE VT TH
		linear	.00±.20		
		0±2'	.000±.10	scale 1:1	
		dr	ANDY ZHANG	10/29/12	dwg no
		eng	ANDY ZHANG	10/29/12	sheet 2 of 3
		chr	BIAN RICK	10/29/12	size
		app	BIAN RICK	10/29/12	20021311
sheet index		revision			type
sheet					Product Customer Drawing

NOTES:

1. MATERIAL:
HOUSING: HIGH TEMPERATURE PLASTIC; UL94-V0; BLACK.
TERMINAL: PHOSPHOR BRONZE.
2. FINISH:
TERMINAL: GOLD OR GXT PLATING AT CONTACT AREA (SEE TABLE);
2.54um/100u" MIN MATTE TIN OR GOLD FLASH AT SOLDER TAIL AREA;
1.27um/50u" MIN Ni OVER ALL AS UNDERPLATIN
3. PRODUCT SPEC PER GS-12-629;
4. PACKAGE SPEC PER GS-14-1420;
5. RECOMMENDED PCB THICKNESS IS 1.6MM.
6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260~C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION INFRA-RED OR VAPOR PHASE REFLOW OVEN.
7. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
8. PART NUMBER DESCRIPTION:

20021311 - X X X XX X X LF

- LEAD FREE
- PLATING(SEE TABLE 2)
 - 1: GOLD FLASH AT CONTACT, 2.54um MIN. MATTE TIN AT TAIL
 - 2: GOLD FLASH AT CONTACT, GOLD FLASH AT TAIL
 - 4: 0.25um Au MIN. AT CONTACT, 2.54um MIN.MATTE TIN AT TAIL
 - 5: 0.25um Au MIN. AT CONTACT, GOLD FLASH AT TAIL
 - 6: 0.38um GXT MIN. AT CONTACT, 2.54um MIN.MATTE TIN AT TAIL
 - 7: 0.38um GXT MIN. AT CONTACT, GOLD FLASH AT TAIL
 - 8: 0.76um GXT MIN. AT CONTACT, 2.54um MIN.MATTE TIN AT TAIL
 - 9: 0.76um GXT MIN. AT CONTACT, GOLD FLASH AT TAIL
- PACKAGE:
T: TUBE
PIN COUNT: (SEE TABLE 1)
06, 08, 10, ..., 98, A0
(6 - 100 EVERY EVEN PIN)
TAIL LENGTH:
0: 2.40MM
RESIN:
0: HIGH TEMPERATURE PLASTIC, BLACK
POST:
0: WITHOUT POST



© 2016 AFCI

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101	MINITEK127®	
ltr	ecn no	dr	date	title	
E				RECEPTACLE VT TH	
angles		linear	.0±.30	mm	
0'±2'			.00±.20	scale 1:1	
dr		ANDY ZHANG	10/29/12	dwg no sheet 3 of 3 size	
eng		ANDY ZHANG	10/29/12	20021311 A3	
chr		BIAN RICK	10/29/12	type Product Customer Drawing	
app		BIAN RICK	10/29/12		
sheet	revision				
index	sheet				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)