


Symbol	Count	Description	Drawn	Approved	Date
∇	4	a. Contact 열압접합기 수형 b. 도금 Pd-Ni용 편향, 단자의 열충부 리 추가	Jonm,Lim		12.05.31
∇	2	a. Bracket-실용부 열, 단자: 1.2-->0.95 b. 열충 편향: PA46-->PA61	Jonm,Lim		12.07.18

- NOTE -
 1. ☆ mark are CTQ dimensions.
 2. Otherwise tolerance: ±0.05
 3. Coplanarity: Max. 0.08

CTQ Dimension	Dimension
☆(1)	9.70 ⁺⁰ _{-0.1}
☆(2)	1.50±0.05
☆(3)	10.20±0.05
☆(4)	열충부: 0.08 Max.

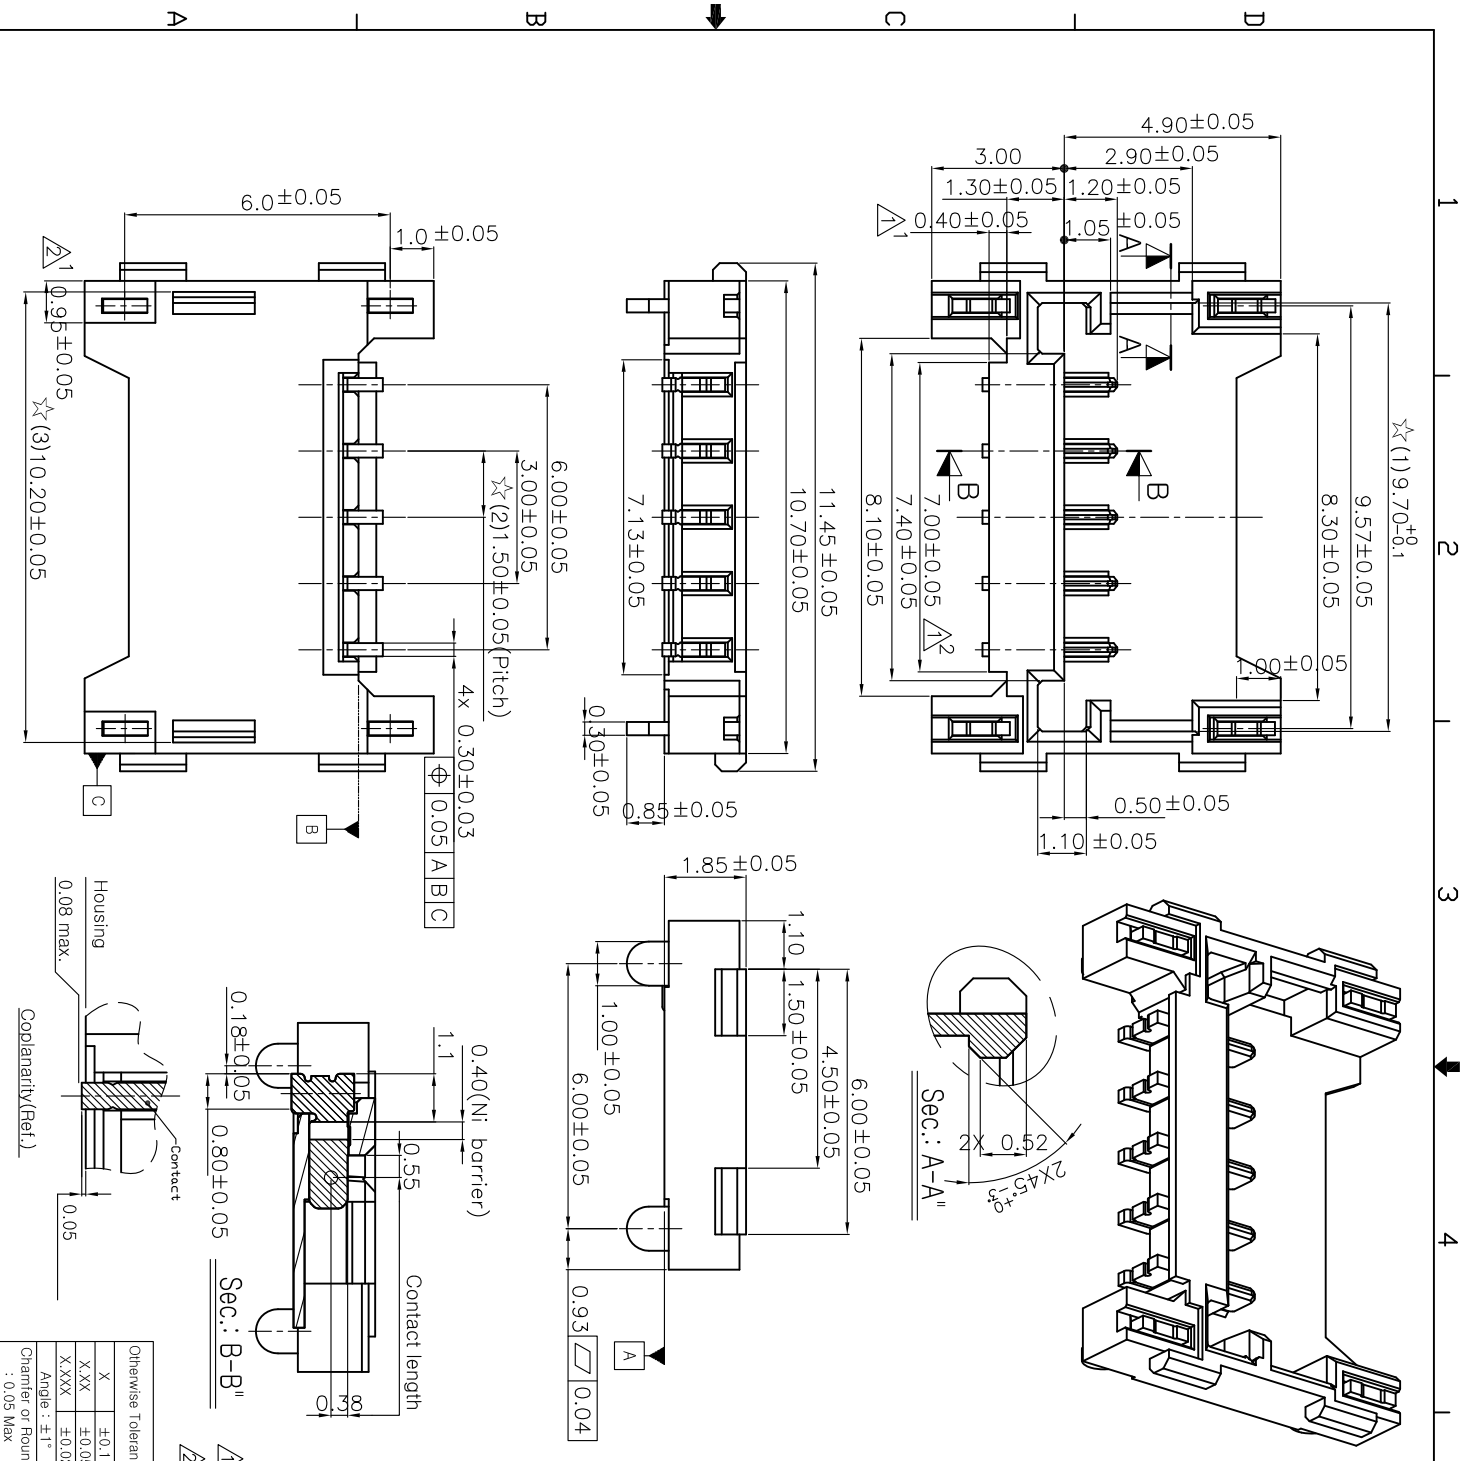

No	Part name	Q'ty	Material	Finish	Remark
3	Bracket	4	SUS-301		
2	CONTACT	5	C7025-TM02		Ni-2-5μ + Pd-Ni-0.75μ min. + Au-0.05μ min.
1	HOUSING	1	PA6T (HTN)		

Drawn by	Model name	Model No.
Designed by	SP Battery connector	202-02970-00518
Checked by	Male assembly	Part No.
Date	Projection	Size
2010	3rd ANGLE	A3
Scale	Unit	Page
N/S	mm	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Contacts](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[3.5MM-UNIVERSAL-CONTACT](#) [120220-0311](#) [101267-209](#) [009155003001013](#) [72](#) [1189](#) [120](#) [120220-0202](#) [120220-0206](#) [1241](#) [120220-0204](#) [120220-0210](#) [117](#) [111](#) [497](#) [5203](#) [5219](#) [5225](#) [550](#) [553](#) [555](#) [556](#) [202-02970-00518](#) [009155002100006](#) [009155002101006](#)
[009155002201006](#) [009155002301006](#) [009155002401006](#) [009155002402006](#) [009155002541006](#) [009155002852006](#) [009155003001016](#)
[009155003002016](#) [009155003003016](#) [009155003101006](#) [009155003201006](#) [009155003301006](#) [009155003401006](#) [009155003402006](#)
[009155003541006](#) [009155003852006](#) [009155004002016](#) [009155004003016](#) [009155004201006](#) [009155004301006](#) [009155004401006](#)
[009155004402006](#) [009155004852006](#) [009155005001016](#) [009155005002016](#)