Octonet Contact: The Superior Ethernet Contact System for MIL-DTL-38999, Series III





Pin for 24 awg

Socket for 24 awg

Pin PCB Tail

Socket PCB Tail

OVERVIEW

Eight strategically spaced inner contacts form four 100 Ohm matched impedance differential pairs.

FEATURES

- + Available in size 8 crimp termination style
- + Also available in PC Tails
- + Can be installed in existing size 8

 Quadrax cavities
- + Meets performance specifications of CAT-6A cable
- + 10G Ethernet compliant
- + Overall higher bandwidth than standard CAT5E Quadrax-supports up to 4.0 Gbps per pair
- + Enhanced crosstalk performance (compared to standard Quadrax)
- + Supports wire ranges 26 to 24 gauge
- + Requires modification of MIL-DTL-38999 connector to accommodate keyed contacts

BENEFITS

- + Easy drop-in replacement to installed connectors no need to redesign
- + Self removing contact feature no extra contact extraction tool needed (24 Gauge only)

Contact Style	Part Number	*Cable	AWG
Crimp Pin	21-032904-001	Thermax: MX10G-24HP	24
Crimp Socket	21-032905-001	Thermax: MX10G-24HP	
Crimp Pin	21-032904-011	W.L.Gore: RCN8966-24	
Crimp Socket	21-032905-011	W.L.Gore: RCN8966-24	
Crimp Pin	21-032904-021	PIC E6A3824	
Crimp Socket	21-032905-021	PIC E6A3824	
PCB Pin	21-032906-001		
PCB Socket	21-032907-001		

^{*}Not limited to cables shown


SPECS

Environmental Sealing: IAW connector specification
Corrosion Resistance: 500 hours salt spray

EMI Shielding: 360 degree shielding on each pair

Mating Cycles: 500 cycles

Voltage Rating: 500 Vrms max @ sea level Dielectric Withstanding Voltage: 500 VAC RMS sea level

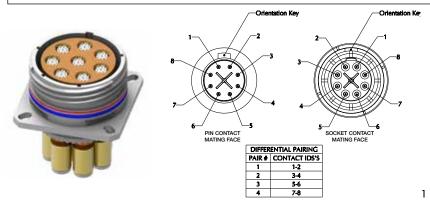


SIGNAL INTEGRITY CONTACT DATA






Contact Differential Insertion Loss

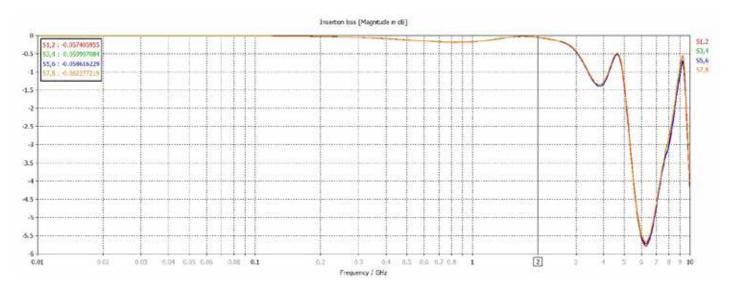


Contact Differential Return Loss

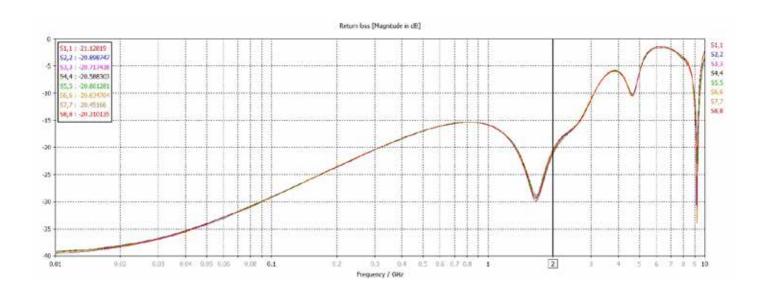






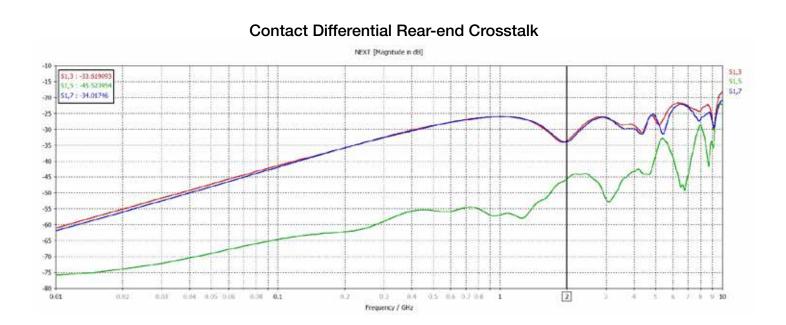


10GBASE-T data (two mated contacts on each end of 100 meter CAT6a cable)

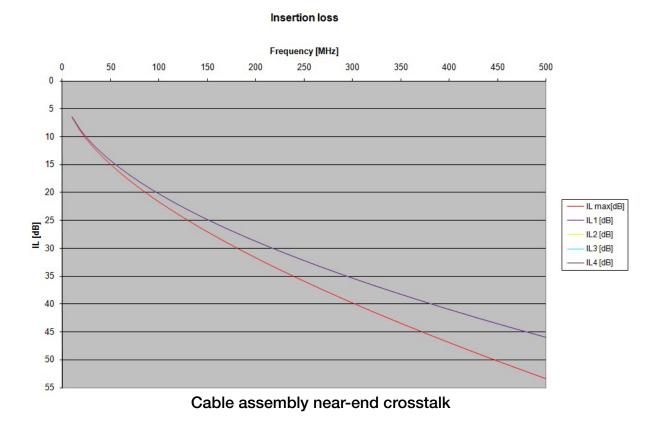






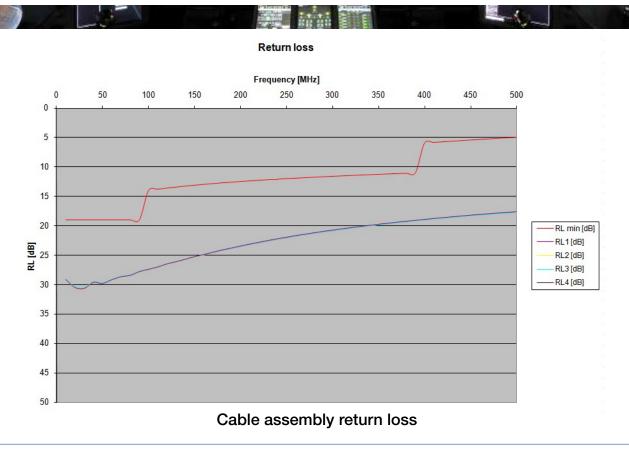


Near-end crosstalk

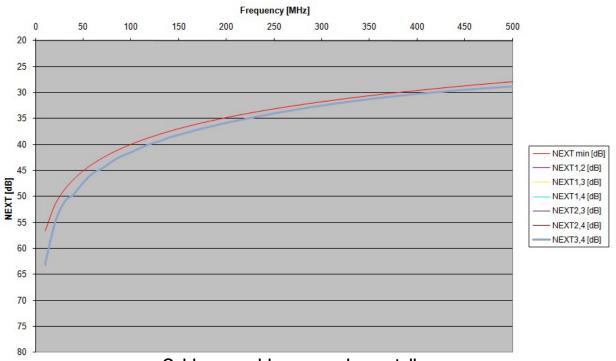


SIGNAL INTEGRITY CONTACT DATA



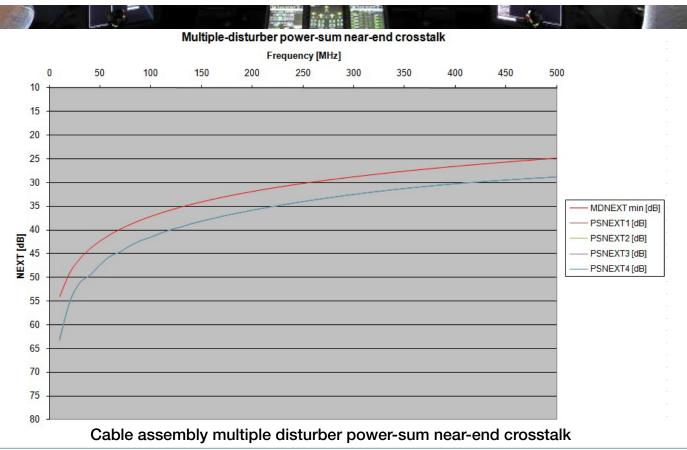


Equal-level far-end crosstalk

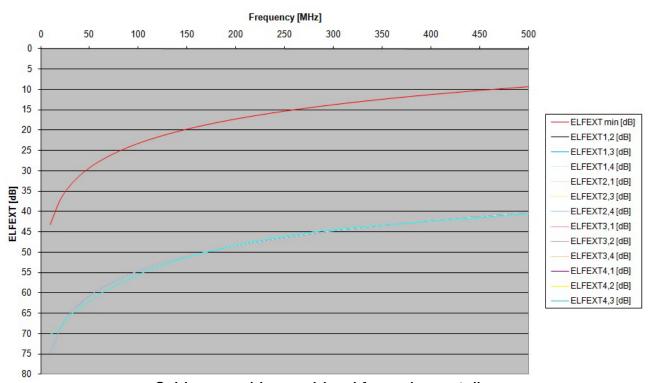



Multiple disturber power-sum equal-level far-end crosstalk

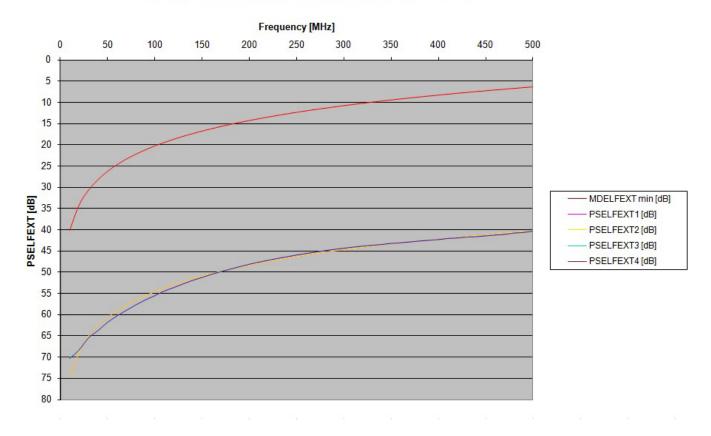

Cable assembly multiple disturber power-sum equal-level far-end crosstalk

Contact Us:

Sandra Wildenstein

E-mail: swildenstein@amphenol-aao.com

Phone: 607-563-5379

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

AMPHENOL is a registered trademark of Amphenol Corporation. ©2014 Amphenol Corporation REV:12/15/2014

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular MIL Spec Contacts category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

006-1189-20 71-VEAM 809-023 809-111 811393-000 850-014 97-45-1418P-5(920) 97-45-1418S-4 D-602-0106CS076 AIC12-14P

AIC16-16PG AIC8-12P AIC8-8SG AIC8-8SRAD 1495044-1 BACC47CP2T BACC47CP3S BACC47DP4 BACC47GC1A BACC47GN1

16968/2C 21-033909-028 241611N001 2560-220-2031 27915-38T9 27964-38T112 2M809-118 97-67-36-20 AIC12-16P AIC16-14SG

AIC16-18PG AIC16-18S AIC16-20PG AIC4-4PG CE102S-18 M39029/30-221 M39029/77-430 416-2020-088I MDM-21SH003B-F222 48
100-5014P-02 BA-4020-50LD BA-4120-50LD BACC47CN2 BACC47GC3A BACC47GD3A BACC47GM1 52G137 REV A CB2-18-21PS

D-602-1116CS2727 D-602-1117CS2727