
| NOTE:   |                      | 272301                      |  |
|---|----------------------|-----------------------------|--|
| 1. ELECTRIC PERFORMANCE   |                      | THIRD ANGLE PROJ.           | REV DESCR<br>A RELEASE   |
| IMPEDANCE ( $\Omega$ ) : 50<br>FREQUENCY RANGE : DC-6 GHz   |                      | THIRD ANGLE PROJ. 🖤 🖯       | RELEASE  |
| VSWR : ≤ 1.065 (DC-3GHz)<br>: ≤1.10 (3-6GHz)  |                      |                             |  |
| INSERT LOSS (dB) : < 0.1<br>PIM (dBc): : <-160 (2X43dBm)  |                      |                             |  |
| INSULATION RESISTANCE (M $\Omega$ ) : 10000<br>PROOF VOLTAGE (V) : 3000   |                      |                             |  |
| CONDUCTOR RESISTANCE (m $\Omega$ ) : OUTER CONDUCTOR <0.2 INNER CONDUCTOR <0.8  | -                    | 1.445<br>[36,70]            |  |
| II. MECHANICAL PERFORMANCE<br>MECHANICAL WEAR : 500   |                      | 0.098                       |  |
| III. MATERIAL AND PLATING   | <u>↓</u>             |                             | N  |
| OUTER CONDUCTOR : BRASS PLATING COPPER-TIN-ZINC 2µm<br>INNER CONDUCTOR : SPRING COPPER PLATING Ag 5µm   |                      |                             |  |
| INSULATION : PTFE<br>BULKHEAD NUT BRASS COPPER-TIN-ZINC 2 µm  |                      |                             |  |
| IV. ENVIRONMENT   |                      |                             |  |
| TEMP RANGE : -55 °C TO +155 °C<br>WEATHER STANDARD : IP67   |                      |                             |  |
| ROHS COMPLIANT  |                      |                             |  |
|   |                      |                             |  |
|   |                      |                             | $( \begin{tabular}{c} \begin{tabular}{c} ( \begin{tabular}{c} \begin{tabular}{c} \end{tabular} \end$   |
| ∠∅1.161±0.008   |                      |                             |  |
| [29.50±0.20]  |                      |                             |  |
|   | M29X1.5 6g<br>TYP(2) |                             |  |
|   |                      | ╢┝──╺┝──╺┝──╺╺┼╸╸──╸╸       | +  |
|   | Ø1.417<br>[36.00]    |                             | h h  |
|   |                      |                             |  |
|   |                      |                             |  |
| 1.000±0.008   |                      |                             | /MMMMMMMMMM  |
|   |                      |                             |  |
| <u>RECOMMENDED</u><br>MOUNTING HOLE DIMENSIONS  |                      |                             |  |
|   |                      |                             | $\mathbf{N} = \mathbf{N} = $ |
|   |                      |                             |  |
|   |                      |                             |  |
| 4 NUT BRASS WHITE BRONZE 1  |                      |                             |  |
| 4     NU1     BRASS     WHILE BRUNZE     1       3     INNER CONDUCTOR     SPRING COPPER     SILVER     1   | •                    |                             |  |
| 2 INSULATOR PTFE NATURAL 1  |                      |                             | —1.260 ON HEX  |
| 1     OUTER CONDUCTOR     BRASS     WHITE BRONZE     1       NO     DESCRIPTION     MATERIAL     FINISH     QTY   |                      |                             | [32.00]  |
| NO         DESCRIPTION         MATERIAL         FINISH         QTY           UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:                     | MATERIAL DRAW        | N DATE                      | TITLE  |
| 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES $\pm$ .015 (0,381 mm) $\pm$ .005 (0,127 mm) $\pm$ 1°   | A AR                 | UN PRABU 01-Oc              |  |
| NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are                  | - SEE NOTES ENGI     |                             | DIII KHEAD AD  |
| confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or         | REFERENCE A AR       | UN PRABU 01-Oc<br>OVED DATE |  |
| other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting        |                      |                             |  |
| rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to | CAD                  | FILE                        |  |
| or disclosed by said drawings, specifications, or other data.   |                      |                             |  |

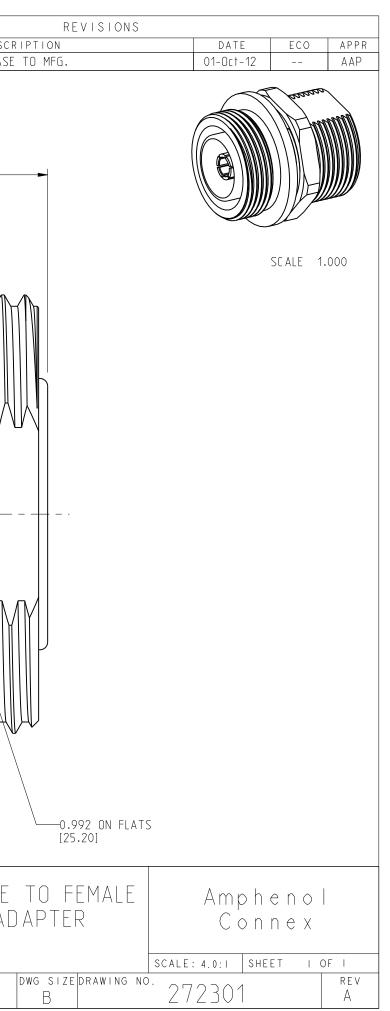

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - In Series category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below :

 5916-1103-603
 5918-1103-000
 5919-1503-000
 651A505
 82-5552
 9030-9523-502
 A0407000
 R114703000W
 R125704000
 R125771001

 R141710000W
 R141723161
 R141730000
 R143730700
 R143770000
 R161703000W
 R161753000W
 R161791530W

 R201705000
 R222705200
 R222M40010W
 R223703180
 R316754000
 R405006000
 R443162000
 AD78TL
 HRM-513S
 1996352-2

 2157155-1
 252169-75
 AD158
 2101130-1
 252186
 R114704000W
 R114720000W
 R125705001
 R125771000
 R125771001W

 R125791501W
 R127704001
 R127.870.001
 R127872001
 R141717000
 R142710000
 R143703000
 R143704000
 R143705700